

IN THE UNITED STATES  
PATENT AND TRADEMARK OFFICE

PATENT APPLICATION

Albert Chow et al.

CASE (IDS 1999-0013)

TITLE: WIRELESS CENTREX CALLER ID

ASSISTANT COMMISSIONER FOR PATENTS  
WASHINGTON, D.C. 20231

SIR:

Enclosed are the following papers relating to the above-named application for patent:

304 Pages of Specification  
68 Informal sheets of drawings  
Declaration and Power of Attorney  
Preliminary Amendment  
Assignment and Cover Sheet

Fee calculation based on post entry of Preliminary Amendment:

CLAIMS AS FILED				
	NO. FILED	NO. EXTRA	RATE	CALCULATIONS
Total Claims	18 - 20 =	0	x \$18=	\$0
Independent Claims	2 - 3 =	0	x \$78=	\$0
Multiple Dependent Claim(s), if applicable			\$260=	\$0
Basic Fee				\$760.00
Assignment Fee				40.00
			TOTAL FEE:	\$800.00

Enclosed is our check in the amount of \$800.00 to cover the filing fee. Duplicate copies of this letter are enclosed. In the event of non-payment or improper payment of a required fee, the Commissioner is authorized to charge or to credit **Deposit Account No. 19-0733** as required to correct the error.


ASSISTANT COMMISSIONER FOR PATENTS

Page 2

Please address all correspondence to **S. H. Dworesky, AT&T Corp., P.O. Box 4110, Middletown, New Jersey 07748**. However calls should be made to me at 202-508-9119.

Respectfully submitted,

Date: December 13, 1999

By:   
Thomas H. Jackson  
Registration No. 29,808  
Kevin Alan Wolff  
Registration No. 42,233

BANNER & WITCOFF, LTD.  
1001 G Street, N.W.  
Eleventh Floor  
Washington, D.C. 20001  
Telephone: (202) 508-9100

3493.79761

66621" 0423460

**PATENT APPLICATION**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Application of

Group Art Unit: TBA

Albert Chow, et al.

Examiner: TBA

Serial No. TBA

Attorney Docket No: 03493.79761

(Client Ref. No. 1999-0013)

Filed: December 13, 1999

**For: WIRELESS CENTREX CALLER ID**

**PRELIMINARY AMENDMENT**

Assistant Commissioner of Patents

Washington, D. C. 20231

Sir:

Prior to examination and calculation of the filing fees, please amend the above-identified application as follows.

**IN THE SPECIFICATION:**

Page 1, delete lines 5-8 in their entirety, insert --This application is a continuation-in-part of applications serial numbers 09/224,272 filed 12/31/98 and 09/233,567 filed 12/31/98. This application relates to the provisional application serial number 60/144,317 filed 12/31/98. The complete disclosures of these application are hereby incorporated by reference.--

Page 134, line 1, delete "Busy Call Forwarding", insert --Programmable Ring Call Forwarding--.

Page 138, line 15, delete "Time-of-Day Call Forwarding", insert --Busy Call Forwarding--.

Page 140, line 4, delete "Programmable Ring Call Forwarding", insert --Time-of-Day Call Forwarding--.

On page 210, after line 8, please add the following:

--The following applications, which have each been filed on the same day as the present application, are incorporated by reference as to their entire contents for all purposes:

1. U.S. Patent Application Serial No. TBD (Attorney Docket No. 3493.79753; Client Reference No. 1999-0023), entitled "Wireless Centrex Conference Call Adding A Party," invented by Chow et al.
2. U.S. Patent Application Serial No. TBD (Attorney Docket No. 3493.79754; Client Reference No. 1999-0006), entitled "Wireless Centrex Conference Call Deleting A Party," invented by Chow et al.
3. U.S. Patent Application Serial No. TBD (Attorney Docket No. 3493.79752; Client Reference No. 1999-0009), entitled "Wireless Centrex Automatic Callback," invented by Chow et al.
4. U.S. Patent Application Serial No. TBD (Attorney Docket No. 3493.79755; Client Reference No. 113716), entitled "Unconditional Call Forwarding In A Wireless Centrex Services System," invented by Chow et al.
5. U.S. Patent Application Serial No. TBD (Attorney Docket No. 3493.79756; Client Reference No. 113715), entitled "Programmable Ring-Call Forwarding In A Wireless Centrex Services System," invented by Chow et al.



6. U.S. Patent Application Serial No. TBD (Attorney Docket No. 3493.79757; Client Reference No. 113714), entitled "Time-of-Day Call Forwarding In A Wireless Centrex Services System," invented by Chow et al.
7. U.S. Patent Application Serial No. TBD (Attorney Docket No. 3493.79758; Client Reference No. 1999-0011), entitled "Wireless Centrex Call Return," invented by Chow et al.
8. U.S. Patent Application Serial No. TBD (Attorney Docket No. 3493.79760; Client Reference No. 1999-0017), entitled "Wireless Centrex Call Screen," invented by Chow et al.
9. U.S. Patent Application Serial No. TBD (Attorney Docket No. 3493.79759; Client Reference No. 1999-0012), entitled "Wireless Centrex Call Transfer," invented by Chow et al.
10. U.S. Patent Application Serial No. TBD (Attorney Docket No. 3493.79751; Client Reference No. 1999-0024), entitled "Call Waiting In A Wireless Centrex System," invented by Chow et al.
11. U.S. Patent Application Serial No. TBD (Attorney Docket No. 3493.79762; Client Reference No. 1999-0014), entitled "Distinctive Ringing In A Wireless Centrex System," invented by Chow et al.
12. U.S. Patent Application Serial No. TBD (Attorney Docket No. 3493.79763; Client Reference No. 1999-0015), entitled "Speed Calling In A Wireless Centrex System," invented by Chow et al.

13. U.S. Patent Application Serial No. TBD (Attorney Docket No. 3493.79764; Client Reference No. 1999-0016), entitled "Busy Call Forwarding In A Wireless Centrex Services System," invented by Chow et al.
14. U.S. Patent Application Serial No. TBD (Attorney Docket No. 3493.78954; Client Reference No. 113559), entitled "Wireless Centrex Call Hold," invented by Chow et al.
15. U.S. Patent Application Serial No. TBD (Attorney Docket No. 3493.84270; Client Reference No. 1999-0531), entitled "Wireless Centrex Feature Activation/Deactivation," invented by Chow et al.
16. U.S. Patent Application Serial No. TBD (Attorney Docket No. 3493.85229; Client Reference No. 113481-CIP), entitled "User Proactive Call Handling," invented by Brachman et al.
17. U.S. Patent Application Serial No. TBD (Attorney Docket No. 3493.85230; Client Reference No. 113421-CIP), entitled "Wireless Centrex Services," invented by Chow et al.--

**IN THE CLAIMS:**

Please amend the claims as follows:

Page 211, delete "I-VIII: Wireless Centrex Services."

Pages 211-221, delete claims 1-70.

Page 221, delete "IX. Feature Activation/Deactivation."

Page 221-225, delete claims 1-18.

Page 225, delete "X. Call Hold."

Pages 225-232, delete claims 1-36.

Page 232, delete "XI. User Proactive Call Handling."

Pages 232-241, delete claims 1-45.

Page 241, delete "XII. Call Transfers."

Pages 241-247, delete claims 1-33.

Page 247, delete "XIII. Caller ID."

Page 250, delete "XIV. Screening Calls."

Pages 250-256, delete claims 1-28.

Page 257, delete "XV. Call Forwarding."

Page 257, delete "A. Unconditional Call Forwarding."

Pages 257-259, delete claims 1-12.

Page 259, delete "B. Busy Call Forwarding."

Pages 259-261, delete claims 1-8.

Page 261, delete "C. Time-of-Day Call Forwarding."

Pages 261-263, delete claims 1-11.

Page 263, delete "D. Programmable Ring Call Forwarding."

Pages 263-265, delete claims 1-10.

Page 265, delete "XVI. Call Waiting."

Pages 265-267, delete claims 1-14.

Page 268, delete "XVII. Distinctive Ringing."

Pages 268-270, delete claims 1-12.

Page 270, delete "XVIII. Returning Calls."

Pages 270-279, delete claims 1-41.

Page 279, delete "XIX. Automatic Callback [DJS]."

Pages 279-288, delete claims 1-41.

Page 288, delete "XX. Speed Calling."

Pages 288-291, delete claims 1-13.

Page 291, delete "XXI. Conference Calling."

Page 291, delete "A. Adding A Party To An Existing Call."

Pages 291-299, delete claims 1-40.


Page 299, delete "B. Deleting A Party From An Existing Call."

Pages 299-303, delete claims 1-20.

#### REMARKS

Applicant respectfully requests the examiner to enter these amendments prior to examination of the present application.

Respectfully submitted,

  
\_\_\_\_\_  
Thomas H. Jackson  
Registration No. 29,808  
Kevin Alan Wolff  
Registration No. 42,233

December 13, 1999

Banner & Witcoff, Ltd.  
Eleventh Floor  
1001 G Street, N.W.  
Washington, D. C. 20001-4597  
(202) 508-9100

THJ/KAW/mmd

## **WIRELESS CENTREX CALLER ID**

This application is a continuation-in-part of applications serial numbers 09/224,272  
5 filed 12/31/98; 09/223,567 filed 12/31/98; and provisional application serial number  
60/114,317 filed 12/31/98, now abandoned.

### **Field of the Invention**

10 The instant invention relates generally to the field of communication, and more  
particularly, to the field of personal communications. The present invention articulates  
methods and systems for extending the benefits of wireless voice and data services to  
subscribers, especially in business premises and public environments, such as universities  
15 and hospitals. Furthermore, the present invention is geared towards providing methods and  
systems for processing and controlling communications in wireless communications and in a  
wireless centrex based environment.

### **Background**

20 The challenges of an increasing mobile workforce have resulted in businesses  
migrating towards a more flexible and decentralized working environment. These newly  
evolved environments have created a need for communication systems that must be capable  
of facilitating untethered communication at any time and any place. Consequently, there is  
25 vast growth in emerging technologies that facilitate communication anywhere and anytime.  
Such technologies are employed in end user devices such as pagers, cellular telephones, and  
mail systems such as voice mail and e-mail systems.

## Patent Application

There presently exists both wireline telephone network systems for home and office use and cellular telephone systems for wireless mobile calls anywhere wireless services are offered (i.e., anywhere a user subscribed cellular base station reception can reach), which are interconnected to each other through the Public Switched Telephone Network (PSTN). As  
5 such, a user has a choice of contacting other telephone users or being contacted by other telephone users by using either the wireline telephone system or the cellular phone system, each having their own respective detriments.

Wireline business telephone service is typically more economical than cellular phone service. However, if a user decides to use a wireline telephone as their only business  
10 telephone they can not be immediately contacted if they are not in their own office where their business telephone is physically located. Nor can the user easily make telephone calls while not in his own office or on travel. On the other hand, if a user decides to have a cellular phone as their only business telephone they can be contacted at anywhere at anytime but will likely incur higher costs, e.g., airtime charges, which in total can be higher than  
15 using wireline telephone services. In the aggregate the cost of cellular telephone service to all employees of a company is generally cost prohibitive. In addition, a cellular telephone does not typically provide the feature/function of a wireline telephone service (e.g., Integrated Services Digital Network (ISDN) and centrex feature/function).

Furthermore, if a user decides to have both a wireline telephone and a cellular phone  
20 for their business use, they incur cost for using both systems and experience the inconvenience of having two separate telephones and thus two separate voice mail systems to check for messages. A caller is also inconvenienced by having to call both the user's wireline telephone number and the user's cellular telephone to reach the user.

Wireline telephone network systems (including ISDN and centrex capabilities) and cellular telephone systems each have various feature/functions available to the user.

Therefore, a need exists to provide a wireless centrex system (WCS) having features and functions presently available in existing wireline service and cellular services, as well as

5 offering new feature/functions, while offering low cost telephone service for the working environment.

### **Summary of the Invention**

10 The instant invention addresses this need for an untethered communication systems created by the paradigm shift towards a more flexible and decentralized working environment. The material described in the instant invention discloses a wireless communication platform that provides a solution to the challenge of mobility management by merging and expanding the capabilities of wired and wireless networks. Thus, the  
15 present invention includes systems and methods to provide a wireless communication service that has expanded the features/functions available in wireline and cellular telephone systems and the relative cost of the wireline system using a mobile telephone system and service that is added to existing wireline telephone systems equipment, to offer cost effective wireless communications for the working environment.

20 The instant invention includes a wireless centrex system (WCS) that allows a subscriber to use the same standard cellular/PCS telephone in both the wireless centrex system domain as well as the public cellular system domain. In the WCS domain, subscribers can use their cellular/PCS as a cordless-like phone without incurring air-time charges. The WCS has the advantage of providing a working environment mobile telephone

system having traditional centrex and PBX type services such as call waiting, call hold, call forwarding, caller ID, three party conference calling, and call messaging. The WCS also includes additional enhanced features like message services used for paging, call screening, call waiting, distinctive ringing, user proactive call handling, automatic callback, call return  
5 and speed calling.

In general, the present invention is directed towards a method and system for extending the benefits of wireless voice and data systems to a wireless centrex system. The method and system as described in the instant invention, provides flexible software driven support for future generation air interfaces, as well as support for current legacy second  
10 generation air interfaces.

In traditional centrex systems, subscriber's locations are fixed, and as a result, the call delivery mechanism to deliver a call to a subscriber is predetermined. However, in a wireless environment, the subscriber has the flexibility to continuously move throughout a specified coverage area. Consequently, there exists a need to provide an intelligent call and  
15 message delivery mechanism. The instant invention introduces a novel call delivery mechanism using an Advanced Intelligent Network (AIN) to achieve delivery. This AIN has a Service Switching Point (SSP) which utilizes a triggering mechanism to determine the appropriate call handling treatment for a specific call. As such, the system includes, for example, an existing local digital switch (LDS) as the SSP, an intelligent server (herein  
20 referred to as a network server platform (NSP)) coupled to the LDS for processing AIN communications, a plurality of remote digital terminals (RDT) coupled to the LDS, a plurality of intelligent transceivers (herein referred to as voice access ports (VAP)) coupled to the RDT (alternatively: the VAP could be coupled directly to the LDS), and a plurality of



mobile stations (MS) which communicate with the VAPs through an air interface (wireless). Although a general WCS configuration with existing wireline centrex equipment has been provided as one preferred embodiment, there are many other configurations possible some of which are shown (e.g., WCS using PBX or having wireless data ports) and the basic  
5 system interfaces with other existing systems such as a PSTN and provider internet.

In operation, for example, the LDS upon receiving an incoming call with a directory number (DN) is triggered to communicate with a network server platform (NSP) to determine, using AIN, whether the DN has been set up to be associated with a mobile station (MS) and WCS service. The NSP tells the LDS to which of a plurality of VAPs connected  
10 to a particular RDT the desired mobile station is presently registered with (connected to via air interface RF channel), and how to route the call to the mobile station having the mobile station identification number (MSIN) associated with the called DN. The various feature/functions provided in the WCS services of the present invention are summarized below.

### **Feature Activation/Deactivation**

Many of the feature/functions provided in the present invention WCS require selection by the mobile station user. As such, the present invention provides a system and method for a mobile station user to activate and deactivate particular features/functions. For  
20 example, the Mobile Station (MS) user dials a feature activation/deactivation code into a mobile station which is then sent to the intelligent transceiver (Voice Access Port (VAP)) over a digital control channel (DCCH) and the VAP sends an origination request message including the feature code to an intelligent server (network server platform (NSP)). The

NSP determines whether the particular requested feature is authorized for the particular mobile station requesting the feature and activates the feature if it has been authorized. The NSP returns a message through the Local Digital Switch (LDS) and the VAP to the MS indicating that the feature is either activated or unavailable. If the feature/function code entered into the MS is for deactivation the process is similar except that the NSP checks to see if the feature/function is active and if so, turns the feature/function off. In this case, the NSP returns a message through the Local Digital Switch (LDS) and the VAP to the MS indicating that the feature has been deactivated.

#### Call Hold

One feature of the present invention provides enhanced call hold functionality. The WCS service provides call hold/unhold functionality for a wireless communications unit (mobile station (MS)) so that a user can place an active call or an incoming call on hold and retrieve the call later. One aspect of the call hold feature of the present invention allows a user to press a button, key, or key combination and/or button combination on his mobile communications unit (MS) to place an active or incoming call on hold. Further, another aspect of the call hold feature allows a user to press the same or a different button, key, key combination and/or button combination to retrieve the call from hold. The call hold feature may also allow the MS user to play a personalized message to the party placed on hold.

A still further aspect of the call hold feature for the present invention allows a mobile phone subscriber to place an incoming call on hold without first having to answer the call. According to one such embodiment, the calling party can be coupled to, for example, a voice processing unit (VPU) to receive a message that indicates the call is on hold and the

called party (WCS subscriber) will be with you shortly. Thus, the WCS of the present invention provides a user with the ability to interactively place an incoming call on hold in real time without first answering the call, have the caller automatically instructed that the call is on hold, and to pickup the call sometime in the near future.

5

### **User Proactive Call Handling**

Another feature of the present invention provides user proactive call handle (UPCH) functionality and capability. This feature allows a mobile telephone user to proactively handle a call in an intelligent wireless communications system. A communications management methodology according to the present invention allows a user to proactively handle calls destined to the user's terminal, e.g., a mobile station MS. One aspect of this feature allows a user to process and terminate an incoming call in real time.

10

According to an illustrative embodiment of the present invention, a subscriber is notified of an incoming call via a Short Message Service (SMS) message with caller ID or a user alert, such as a tone or ringing. Upon receipt of the alert, the subscriber may select from a series of options, how to process and terminate the incoming call. For example, if an incoming call is of high priority and requires immediate attention, the subscriber may decide to answer the call immediately. If the subscriber decides that the call does not require immediate attention, he may opt to provide a delayed answer. Such a delayed answer option can involve connecting the call to an announcement prior to answering the call. Still further, if neither of the prior options is suitable, then the subscriber may opt to send the call to a voice mail system, from which a recorded message can later be retrieved. Yet another option of terminating the call is to forward the call to another phone. In the event that the

15

20

subscriber decides that the incoming call should not be answered, the subscriber may choose to reject the call. If the subscriber decides that none of the aforementioned options should be proactively taken, then a default option can be used to terminate the call. Such a default option may include, but is not limited to, forwarding the call, delaying the answer, sending  
5 the call to a voice mailbox, or rejecting the call.

Another aspect of the UPCH feature provides the ability to delay allocation of the voice channel to a called party until when, if at all, the incoming call to the called party requires a voice channel. This is carried out by allowing a called party to receive notification of an incoming call over the control channel and to return the selection of the  
10 call handling options upstream over the control channel. Thus, a voice channel need not be allocated until the called party decides to answer the call. This can be beneficial in wireless environments to prevent the unnecessary allocation of voice channels. Once the called party needs a voice channel, the incoming call has priority for available voice channels.

## **15 Call Transfers**

Yet another feature of the present invention provides enhanced call transfer functionality. The WCS services provides call transfer functionality for a wireless communications unit (mobile station (MS)) so that a user can transfer an active call to another DN, i.e., a transfer-to DN, that is within or outside the WCS. The MS user is  
20 provided a quick, user friendly means to transfer an active call to another DN. According to one variation of the call transfer feature/function the MS user enters digits for a call transfer feature code and digits for the transfer-to DN, which are forwarded via a unique Feature

Request message to an NSP to initiate the call transfer feature. After an NSP verifies that the MS is authorized to use the call transfer feature, a unique Transfer message is provided, an announcement is played indicating that call transfer is being initiated, and the active call is placed on hold while a call setup is performed between the VAP (associated with the MS  
5 requesting a call transfer) and the transfer-to DN (which may be associated with either a PSTN or another MS).

In some situations the transfer-to DN may be busy or may not be answered. In such cases, before the call to the transfer-to DN is answered, the MS user can enter another key sequence (a button, key, or key combination and/or button combination) to end the call  
10 transfer and retrieve the call on hold. On the other hand, when the call to the transfer-to DN is answered a unique Transfer Result message is sent to the NSP indicating that the call has been answered and the MS user can enter a key sequence which instructs the WCS to complete the call transfer

## **15 Caller ID**

Still another feature of the present invention provides enhanced caller identification (caller ID) functionality. One feature of the present invention provides enhanced caller identification (Caller ID) functionality. The WCS service provides Caller ID functionality for a wireless communications unit (mobile station (MS)) so that a user can determine a  
20 caller's identity such as the calling party's directory number and location for an incoming or active call and decide how to handle the incoming call, e.g., answer, not answer, forward to voice mail, etc. One aspect of the Caller ID feature of the present invention allows display on the MS of the originating directory number (Calling Party Number) and identity for an

incoming and/or active call, even if the call originates from another MS. Another aspect of the Caller ID feature of the present invention provides the location and identity of the called MS 101 to the calling party and displayed on the calling party's MS 101 during an active call. In either case, a Network Server Platform (NSP) provides the parties desk top phone  
5 directory number (DN) as their telephone number for Caller ID rather than the forward directory number (FDN) associated with a voice access port (VAP) which the MS is presently associated.

A further aspect of the Caller ID feature provides that the calling party may be initially coupled to, for example, a voice processing unit (VPU) including voice recognition  
10 capabilities, so that the calling party can provide their name or other information which will be displayed on the MS of the called party. A still further aspect of the Caller ID feature allows display on the MS 101 of additional information about the calling or called party, for example their address, building number, company affiliation, etc. for an incoming or active call. The MS 101 user can also disable the caller ID on a call-by-call basis. Thus, the WCS  
15 of the present invention provides a MS 101 user with the ability to know the identity of the calling persons before answering a call and the identity and location of a party they are speaking with on an active call, even in the case when the calling party is calling from a WCS MS.

## 20 Screening Calls

An even further feature of the present invention provides call screening functionality and capability. The WCS service provides call screen functionality for a wireless communications unit (mobile station (MS)) so that a user can screen incoming calls to

prevent the user from being disturbed by calls from parties with which the user does not wish to speak. One feature of the call screen feature/function of the present invention allows a user to press a button, key, or key combination and/or button combination on the MS to block out an incoming call(s) originating from a telephone number(s) specified by the user.

- 5 The MS user will specify a list of phone numbers (call screen list) for which incoming calls are to be blocked when received. When any one of the phone numbers on the call screen list is the originating phone number for an incoming call directed to the MS, the system will block that call so that the MS user is not alerted and thus not disturbed.

- 10 A further feature of the call screen feature/function of the invention enables an MS user to specify how the screened call(s) will be handled. The MS user can specify that the screened call may be, for example, sent to an answering service such as a voice mail system, provided an announcement selected by the MS user, or dropped without any announcement.

- 15 Another feature of the call screen feature/function enables the MS user to enter a phone number to the screen call list of phone numbers by either manually entering each digit of the phone number or by indicating that the phone number of the last active call is to be added to the call screen list. In the first case, the MS user can enter a phone number to the call screen list by entering, for example, the call screen feature code followed by the phone number to be blocked. In the second case, the MS user can dynamically enter a phone number in the call screen list by entering, for example, a particular key or entering the call screen feature code without any phone number. The WCS will then determine the phone number of the last active phone call and add that phone number to the call screen phone number list so that any incoming calls from that phone number will be blocked.
- 20

## Call Forwarding

Further aspects of the present invention provide a means for forwarding calls to another number in a WCS 140 system. The number that the call is being forwarded to may be within or outside the WCS 140 system. There are several modes of call forwarding that are available. For example, a call may be unconditionally forwarded, forwarded after a certain number of rings or upon the passage of a certain amount of time, forwarded in response to the called MS 101 being busy, and/or forwarded only during one or more selected time periods. Moreover, one or more of these call forwarding modes may be used in any combination. For instance, a call may be forwarded only during the weekend and only after a predetermined number of rings. The call forwarding feature(s) may be activated/deactivated directly from the MS 101 to be called, from another MS, via a network such as a conventional telephone network or the Internet, and/or by calling a Customer Care Center (CCC) representative.

Accordingly, an aspect of the present invention is directed to systems and methods for forwarding an incoming call, the call originating from a first communication device and being directed to a directory number of a wireless centrex system. For example, the systems and methods may generate a message by a local digital switch in response to the call, and determine by a network server platform, responsive to receiving the message, whether the call should be forwarded. The call may be either forwarded to the second communication device responsive to the network server platform determining that the call should be forwarded, or routed to a wireless mobile station having a forward directory number associated with the directory number responsive to the network server platform determining that the call should not be forwarded.

In a further aspect of the present invention, the systems and methods may determine by the local digital switch whether the wireless mobile station is busy with another call. The call may be either forwarded by the local digital switch to the second communication device responsive to determining that the wireless mobile station is busy, or routed to the wireless mobile station responsive to determining that the wireless mobile station is not busy.

In yet a further aspect of the present invention, the systems and methods may generate a current time and determine whether the current time is between a begin time and



an end time. The call may either be forwarded to the second communication device responsive determining that the current time is between the begin time and the end time, or routed to the wireless mobile station responsive to determining that the call should not be forwarded.

5 In a still further aspect of the present invention, the systems and methods may alert the wireless mobile station and count a predetermined amount of time in response to the call. The call may be forwarded to the second communication device responsive to the predetermined amount of time being counted.

## 10 Call Waiting

The present invention also provides a method for call waiting in a WCS system. In particular, the call waiting functionality allows a user of a mobile station (MS) to be notified of an incoming call when the MS is being used. That is, when an existing call between the MS user and another party is ongoing, the MS user can be notified of another call directed to  
15 the MS. The call waiting feature also allows the MS user to place an ongoing call on hold and answer the incoming call. Further, the MS user may switch back and forth between the calls. Currently, there is no known call waiting service in a WCS system.

## Distinctive Ringing

20 The present invention also provides a method for distinctive ringing in a WCS system. In particular, the distinctive ringing functionality allows a user of a mobile station in a WCS system to receive a distinctive ring for a call originated from a communications unit having a particular directory number (DN). A user can select one or more DNs for which a distinctive ring will be received when a call is originated from a unit assigned the  
25 selected DN.

## Returning Calls

Still another feature of the present invention provides enhanced call return functionality. The present invention overcomes the drawbacks associated with existing  
5 systems by providing a call return functionality for wireless communication systems. The invention enables automatically placing the phone number of an incoming call, where the phone number is not unknown or security-protected, in a memory so that the call may be automatically dialed when it is convenient for the person to return the call.

A user may wish to handle calls from different parties differently. Thus, in one  
10 embodiment, where more than one incoming call is received, the phone numbers for the incoming calls may be stored in a first-in, last-out viewing order on a display. Alternatively, the phone numbers for the incoming calls may be stored in a first-in, first-out viewing order or any predetermined order. In addition, prior to the wireless call return processor initiating dialing the phone number for the incoming call, the user may utilize the wireless call return  
15 processor to select which incoming call he wishes to return first by moving a first displayed phone number to the end of a list of phone numbers of incoming calls received and if desired, repeating this action. Alternatively, if the user desires to delay briefly returning the call associated with the first displayed phone number call, the user may transpose the first displayed phone number with a next phone number of the incoming calls received. Again,  
20 this action may be repeated as desired.

Where the phone number is unknown or is security-protected so that display of the phone number is blocked, the display may indicate that the phone number for the incoming call is unable to be displayed. Alternatively, a voice prompt, a short message, or a

predetermined tone may indicate that the phone number for the incoming call is unknown or unable to be displayed.

### **Automatic Callback**

5           Another feature of the present invention provides enhanced automatic callback functionality. Present wireless handsets do not provide for automatic callback to free the user from having to redial, perhaps repeatedly, a number in order to complete a call. Clearly, there is a need for a system, wireless apparatus and method for providing automatic callback for a user in a wireless communication system when a called number is unavailable.

10           The present invention overcomes the drawbacks associated with existing systems by providing an automatic callback functionality for wireless communication systems. The invention provides for automatically redialing the phone number of a call when a number called by a wireless user is busy, thus permitting the wireless user to continue with other work and to answer the phone when the callback succeeds in connecting the call.

15           When the call is connected, the wireless system may generate a voice prompt via the wireless apparatus, a predetermined tone, an alert light or the like, to notify the wireless user that the callback call is connected. The wireless user may answer the call immediately, may press a button or use a verbal command or commands to put a present call on hold and switch to the callback call. If the wireless user chooses to put the callback call on hold, a  
20           pre-recorded message from the wireless system may be played for the callback caller to alert him that the wireless user will be answering his call in a very short time.

### **Speed Calling**

The present invention also provides a method for speed calling in a WCS system. In particular, the speed calling functionality allows a user of a mobile station in a WCS system to create a list of at least one phone number for which the subscriber utilizes a speed calling code to call at least one phone number. A subscriber can then call a selected phone number  
5 by entering a provisioned speed calling code rather than a longer telephone number.

## **Conference Calls**

### **Adding A Party To An Existing Call**

Still another feature of the present invention provides enhanced conference call  
10 functionality. The WCS service provides conference call functionality for a wireless communications unit (mobile station (MS)) so that a user can connect additional parties to an active call with a party within or outside the WCS. The MS 101 user is provided a quick, user friendly means to add another party to an active call. Further, the MS 101 user is provided a quick, user friendly means to retrieve an original call before a third party answers  
15 a call during a conference call setup.

According to one variation of the conference call feature/function, the MS 101 user enters digits for a conference call feature code and digits for the conference-with DN, which are forwarded via a Feature Request message to an NSP 106 to initiate the conference call setup procedure. Once the NSP 106 verifies that the MS 101 user is authorized to use the  
20 conference call feature, a Feature Request Acknowledgement message containing instructions to play a voice prompt to the MS 101 is provided to a VAP 103, an announcement is played indicating that a conference call is being initiated, and the active call is placed on hold while a conference call setup is performed between the VAP 103

(associated with the MS 101 requesting a conference call) and the conference-with DN (associated with, for example, either a PSTN or another MS). After the third party answers, the MS 101 user can press another key, for example the "send" button on the MS 101, to re-connect the original party(ies) to the conference call. However, if the WCS is unable to  
5 connect the third party with the MS 101 user, the MS 101 user is prompted and notified of the failure to connect allowing the MS 101 user to terminate the conference call connection procedure by pressing another key, for example the "send" button on the MS 101, to recover the previously active call with the original party(ies).

In some situations the conference-with DN may be busy or may not be answered, or  
10 the MS 101 user may simply decide they no longer wish to connect the third party to the conference call. In such cases, before the call to the conference-to DN is answered, the MS user can decide to end the conference call connection procedure without prior system prompt by entering another key sequence (a button, key, or key combination and/or button combination) to end the conference call transfer connection procedure and retrieve the  
15 original call on hold. For example, the MS 101 user could press the "send" key twice within a short period of time. In response, the conference call connection procedure will cease, the call setup with the third party will be disconnected, and the original call will be retrieved.

### **Deleting A Party From An Existing Call**

20 Still another feature of the present invention provides enhanced conference call functionality. The WCS provides conference call functionality for a wireless communications unit (mobile station (MS)) so that a user can connect and disconnect parties

to an active call with a party within or outside the WCS. The MS 101 user is provided a quick user friendly means to delete a party from an active conference call.

According to one variation of deleting a party from a conference call feature/function, the MS 101 user enters a party drop feature message and the VAP 103 determines that the MS 101 user is requesting that the last party added to a conference call be dropped. The VAP 103 will then request the LDS 104 to drop the last added call of the current conference call. The LDS 104 proceeds by sending the necessary messages to have the last added call released from the conference call. For example, the MS 101 user could press the "send" key twice within a short period of time. In response, the last added call to an active conference call connection procedure will be dropped by the LDS 104.

#### **WCS As A Wireless PBX System**

Another feature of the present invention includes a WCS which is a Wireless PBX system. In this case, the system includes a Intelligent Wireless Controller (IWC) that connects to a Customer Premises PBX and an NSP. The IWC and PBX will provide various functions performed by the LDS and RDT found in a typical WCS.

#### **WCS With Wireless Voice And Data**

Yet another feature of the present invention includes wireless data capability with the WCS. In this case, laptop computers equipped with a transceiver interface with Data Access Ports (DAP) connected to an Integrated Wireless Communication Controller to provide a wireless data system integrated with the WCS Voice Access Ports (VAP) and a LAN.

**Brief Description of the Drawings**

For a more complete understanding of the present invention, reference is now made to the following descriptions taken in conjunction with the accompanying drawings in which  
5 like designations represent like parts, and in which:

Figures A-1C 1 illustrates an exemplary wireless centrex system platform architecture.

Figure 2 illustrates an exemplary wireless centrex network architecture.

Figure 3 illustrates an exemplary signal flow diagram which demonstrates the  
10 registration process which occurs when the mobile station is powered on.

Figure 4 illustrates an exemplary signal flow diagram which demonstrates call origination.

Figure 5 illustrates an exemplary signal flow diagram which demonstrates termination of a call by a mobile station that answers the call.

15 Figure 6 illustrates an exemplary signal flow diagram which demonstrates termination of a call by a mobile station that went unanswered.

Figure 7 illustrates an exemplary signal flow diagram which demonstrates call termination to a roaming subscriber.

20 Figure 8 illustrates an exemplary signal flow, diagram which demonstrates intra-local digital switch assisted handoff.

Figure 9 illustrates a communications network for a wireless centrex system executed using a PBX system according an embodiment of the present invention.

Figure 10 illustrates still another communications network for wireless centrex system capability having a wireless voice and wireless data wireless centrex system according to another embodiment of the present invention.

Figure 11 illustrates an exemplary signal flow diagram which demonstrate feature  
5 activation/deactivation.

Figure 12 shows a block diagram of illustrative communications network according to yet another embodiment of the present invention.

Figure 13 shows an exemplary signal flow for setting up an incoming call used for call hold/unhold feature, in accordance with an illustrative embodiment of the present  
10 invention.

Figure 14A shows a first exemplary call flow for the feature of call hold/unhold during an active call in accordance with an illustrative embodiment of the present invention.

Figure 14B shows a second exemplary call flow for the feature of call hold/unhold during an active call in accordance with another illustrative embodiment of the present  
15 invention.

Figure 15 shows another exemplary signal flow for the feature of call hold/unhold of an unanswered incoming call in accordance with an illustrative embodiment of the present invention.

Figure 16 shows an exemplary user proactive call handling signal flow diagram for  
20 the activation and deactivation of the UPOCH feature in accordance with an illustrative embodiment of the present invention.



Figure 17 shows an exemplary user proactive call handling signal flow diagram for handling an incoming call when the UPOCH feature is employed in accordance with an illustrative embodiment of the present invention.

Figure 18 shows an exemplary proactive call handling signal flow diagram for the delay answer call feature in accordance with an illustrative embodiment of the present invention.

Figure 19 shows a signal flow diagram for an exemplary call transfer to a PSTN telephone in accordance with an illustrative embodiment of the present invention.

Figure 20 shows a signal flow diagram for an exemplary call transfer to a mobile station in accordance with an illustrative embodiment of the present invention.

Figure 21A illustrates a flowchart of an origination leg of a Caller ID information retrieval procedure for one preferred embodiment of the present invention.

Figure 21B illustrates a flowchart of a termination leg of a Caller ID information retrieval procedure for one preferred embodiment of the present invention.

Figure 21C illustrates a signal flow diagram for Caller ID information during call origination for one preferred embodiment of the present invention.

Figure 21D illustrates a signal flow diagram for Caller ID information during call termination for one preferred embodiment of the present invention.

Figure 21E illustrates a flowchart of an origination leg of a Caller ID information retrieval procedure for another preferred embodiment of the present invention.

Figure 21F illustrates a flowchart of a termination leg of a Caller ID information retrieval procedure for another preferred embodiment of the present invention.

Figure 21G illustrates a signal flow diagram for Caller ID information during call origination for another preferred embodiment of the present invention.

Figure 21H illustrates a signal flow diagram for Caller ID information during call termination for another preferred embodiment of the present invention.

5        Figure 22 shows a signal flow diagram for provisioning an exemplary call screen in accordance with an illustrative embodiment of the present invention.

Figure 23 shows a signal flow diagram for dropping a screened call without an announcement for an exemplary call screen in accordance with an illustrative embodiment of the present invention.

10       Figure 24 shows a signal flow diagram for sending a screened call to a voice mail system for an exemplary call screen in accordance with an illustrative embodiment of the present invention.

15       Figure 25 shows a signal flow diagram for dropping a screened call after providing an announcement for an exemplary call screen in accordance with an illustrative embodiment of the present invention.

Figure 26 is an exemplary flow chart of the unconditional call forwarding feature of the present invention.

20       Figure 27 is an exemplary signal flow diagram for signals generated when a call is successfully forwarded using the unconditional call forwarding feature of the present invention.

Figure 28 is an exemplary flow chart of the busy call forwarding feature of the present invention.

Figure 29 is an exemplary signal flow diagram for signals generated when a call is successfully forwarded using the busy call forwarding feature of the present invention.

25       Figure 30 is an exemplary flow chart of the time-of-day call forwarding feature of

the present invention.

Figure 31 is an exemplary signal flow diagram for signals generated when a call is successfully forwarded using the time-of-day call forwarding feature of the present invention.

5        Figure 32 is an exemplary flow chart of the programmable ring call forwarding feature of the present invention.

Figure 33 is an exemplary signal flow diagram for signals generated when a call is successfully forwarded using the programmable ring call forwarding feature of the present invention.

10       Figure 34 illustrates an exemplary embodiment of an Internet web page for activating and/or modifying features according to aspects of the present invention.

Figure 35 shows an exemplary call flow diagram for the call waiting functionality according to an illustrative embodiment of the present invention.

15       Figure 36 shows an illustrative flow diagram for the call waiting service feature according to an embodiment of the present invention.

Figure 37 shows an exemplary call flow diagram for the actual implementation of the distinctive ringing feature according to an illustrative embodiment of the present invention.

Figure 38 is a signal flow chart showing signaling flow steps for an illustrative embodiment implementing a call return in accordance with the present invention.

20       Figure 39 illustrates one embodiment of steps for implementing a method for automatically returning an incoming call in a wireless communication system in accordance with the present invention.

Figure 40 is a block diagram of a wireless apparatus utilized for implementing the method of the present invention in a wireless communication system.

Figure 41 is a flow chart showing another embodiment of steps in accordance with the method of the present invention.

Figure 42 is a block diagram of one embodiment of a wireless communication platform for providing automatic wireless call return in accordance with the present invention.

Figure 43 is a signal flow chart showing signaling flow steps for an illustrative embodiment implementing the automatic callback functionality in accordance with the present invention.

Figure 44 is a signal flow chart showing one embodiment of signaling flow when a mobile station MS moves from an original serving voice access port VAPo to a new voice access port VAPn before a call is connected.

Figure 45 is a flow chart showing one embodiment of steps of a method in accordance with a preferred embodiment of the present invention.

Figure 46 is a block diagram of a wireless apparatus utilized for implementing the method of the present invention in a wireless communication system.

Figures 47A-47C represent a flow chart showing another embodiment of steps for implementing the automatic callback feature of the present invention wherein the wireless user is permitted to automatically re-dial the last number dialed via a queuing process that sets up the call when the called line is idle. Figure 47A illustrates steps during call establishment/activation; Figure 47B illustrates steps for one embodiment implementing the NSP procedure. Figure 47C illustrates steps for one embodiment implementing the VAP procedure.

Figure 48 is a flow chart showing another embodiment of steps in accordance with the method of the present invention.

Figure 49 is a block diagram of one embodiment of a wireless communication platform for providing wireless automatic callback in accordance with the present invention.

5 Figure 50 shows an exemplary call flow diagram for the actual implementation of the speed calling feature according to an illustrative embodiment of the present invention.

Figure 51 is a first partial process flow diagram for a conference call procedure in accordance with an illustrative embodiment of the present invention.

10 Figure 52 is a second partial process flow diagram, related to the first partial diagram of Fig. 51, for a conference call procedure in accordance with an illustrative embodiment of the present invention.

Figure 53 shows a signal flow diagram for an exemplary three-way conference call for adding a PSTN telephone to an existing PSTN – MS call in accordance with an illustrative embodiment of the present invention.

15 Figure 54 shows a signal flow diagram for an exemplary three-way conference call for retrieving an original call when a third party could not be connected to an existing PSTN – MS call for a conference call in accordance with an illustrative embodiment of the present invention.

20 Figure 55 shows a signal flow diagram for a three-way conference call for enabling an MS 101 user to initiate retrieval of an original call with a PSTN telephone of an existing PSTN – MS call without WCS prompting before a conference call is established in accordance with an illustrative embodiment of the present invention.

Figure 56 shows a signal flow diagram for an exemplary deleting (dropping) of a last added party from an active conference call for a PSTN telephone connection leaving an PSTN – MS two-way call, in accordance with an illustrative embodiment of the present invention.

5

### Detailed Description of Preferred Embodiments

#### **I. Acronyms and Short Hand Notations**

Throughout the disclosure of the instant invention, several acronyms and short hand notations are used to aid in the understanding of certain concepts pertaining to the associated system and services. These acronyms and shorthand notations are intended solely for the purpose of providing an easy methodology of communicating the ideas expressed herein, and are in no way meant to limit the scope of the present invention. The following is a list of these acronyms:

AIN	Advanced Intelligent Network
ALS	AT&T Local Services
B-Channel	Bearer Channel
ATM	Asynchronous Transfer Mode
BER	Bit Error Rate
BRI	Basic Rate Interface
BS	Base Station
CB	Communication Bus
CSC	Customer Service Center
CLASS	Custom Local Area Signaling Services

	DCCH	Digital Control Channel
	DAP	Data Access Port
	D-Channel	Data Channel
	DN	Directory Number
5	DPU	Directed Call Pickup with Barge-in
	DS1	Digital Service Level 1
	DS3	Digital Service Level 3
	DSP	Digital Signal Processor
	DTC	Digital Traffic Channel
10	DTMF	Dual Tone Multi-Frequency
	DVCC	Digital Verification Color Code
	EIA	Electronic Industries Alliance
	FAC	Feature Activation Code
	FACCH	Fast Associated Control Channel
15	FDC	Feature Deactivation Code
	FDN	Forward Directory Number
	GR 303	Generic Requirement 303
	IDT	Integrated Digital Terminal/Switch
	IP	Internet Protocol or Intelligent Peripheral
20	IS-136	Interim Standard 136
	ISDN	Integrated Services Digital Network
	ISP	Internet Service Provider
	ISUP	ISDN User Part

	ISUP IAM	ISDN User Part Initial Address Message
	ISUP ACM	ISDN User Part Address Complete Message
	ISUP ANM	ISDN User Part Answer Message
	IWC	Intelligent Wireless Controller
5	LAN	Local Access Network
	LDS	Local Digital Switch
	MAHO	Mobile Assisted Handoff
	MIN	Mobile Identification Number
	MS	Mobile Station
10	MSID	Mobile Station Identification
	MSC	Mobile Switching Center
	NEL	Next Event List
	NSP	Network Server Platform
	OAM&P	Operations, Administration, Maintenance, and Provisioning
15	OC3	Optical Carrier Level 3
	OC12	Optical Carrier Level 12
	PAD	Packet Assembler/Disassembler
	PBX	Private Branch Exchange
	PCH	Paging Channel
20	PCS	Personal Communications Service
	POTS	Plain Old Telephone Service
	PRI	Primary Rate Interface
	PSID	Private System Identification



	PSTN	Public Switched Telephone Network
	Q.931	Signaling Protocol Message Structure
	RDATA	Relay data (Subfield of IS-136 message)
	RDT	Remote Digital Terminal
5	RSSI	Received Signal Strength Indicator
	SC	Self Configuration
	SCP	Service Control Point
	SM	Short Message
	SMDPP	Short Message Delivery Point =To Point
10	SMS	Short Message Service
	SMS	Service Management System
	SMSCH	Short Message Service Channel
	SNMP	Signaling Network Management Protocol
	SONET	Synchronous Optical Network
15	SPACH	SMS Point-to-point Messaging, Paging, and Access Channel
	SS7	Signaling System 7
	SSP	Service Switching Point
	STP	Signal Transfer Point
	STP	Shielded Twisted Pair
20	TAT	Termination Attempt Trigger
	TCP/IP	Transmission Control Protocol/Internet Protocol
	TCAP	Transactional Capabilities Application Part
	TDMA	Time Division Multiple Access

TIA	Telecommunications Industry Association
UPCH	User Proactive Call Handling
VAP	Voice Access Port
VMS	Voice Message System
5 VPU	Voice Processing Unit
WCS	Wireless Centrex System
WCSD	Wireless Centrex System Database
X.25	Cross .25 (Data Packets)

Further, various telecom technical terms are used throughout this disclosure. A  
10 definition of such terms can be found in; H. Newton, Newton's Telecom Dictionary, 14<sup>th</sup>  
Expanded Edition (1998). These definitions are intended for providing a clearer  
understanding of the ideas disclosed herein and are in no way intended to limit the scope of  
the present invention and thus should be interpreted broadly and liberally to the extent  
allowed by the art and the ordinary meaning of the words.

## 15 II. General Overview of Wireless Centrex System Services

An illustrative methodology for implementing an intelligent wireless  
communications system according to the present invention will now be described below.  
While the systems and methods described below relate to a traditional cellular phone system  
20 or a wireless centrex system, it is to be understood that the present invention can be applied  
to all types of wireless communications systems including, but not limited to, satellite  
systems, micro cellular systems, personal communications services, and other mobile  
communication systems. Also, other types of personal communications devices can be

implemented in these systems including, but not restricted to, a portable television, a wireless videophone, and a pager. Also, it is to be understood that the present invention can be applied to any type of wireless network, and that the description below is an illustrative embodiment for a system employing the IS-136 EIA/TIA Interim Standard.

5 In one exemplary embodiment of the instant invention, the wireless centex system is deployed in an in-building environment with various communication interfaces strategically located throughout the building to provide service within the building. In such an in-building environment, the mobile station (MS) assumes the characteristics of a desktop phone with all the Centrex capabilities being available to the mobile user, plus the added  
10 advantage of mobility. A network of picocells served by Voice Access Ports (VAPs) are located within the building and provides the cellular IS-136 air interface. The VAPs are intelligent base stations having ISDN BRI connectivity to a local digital switch (e.g., Lucent 5ESS, Nortel DMS-100). Figures 1A, 1B, and 1C each show an exemplary VAP 103A connected to a Remote Digital Terminal (RDT) 102 via an ISDN BRI interface 2.

15 Hereinafter, references to figures 1A through 1C will be referred to as figure 1, and have a common numbering scheme illustrating the various exemplary elements.

In fact, the same numbering will be used throughout the figures for like elements. The Network Server Platform (NSP) 106 is an adjunct and can be co-located with a switch (LDS 104) to manage the VAPs and call processing control of the MS and provide the  
20 cellular (IS-136) operations for the VAPs. In one embodiment, when a call arrives for a subscriber to their POTS desktop phone 108 and it is not answered, the LDS 104 working in conjunction with the NSP 106 and the VAP 103A will forward the call to the subscriber's mobile station 101A over the VAP's ISDN B-channel 2 and the IS-136 air interface 3. The

WCS system, therefore, offers the capability of a WCS subscriber being reached anytime anywhere within the cell area of the WCS picocells. Further, if a WCS subscriber also subscribes to a macro cellular system the call will be handed off to the macro cellular system local Base Station (BS) when the subscriber leaves the WCS picocell areas.

5       The ISDN BRI lines 2 connecting the VAPs 103A and 103B to the switch carry the signaling traffic on the D-channel (data channel) and the voice traffic on the B-channel (bearer channel). The D-channel utilizes the Q.931 protocol to establish a voice call on the B-channel with the LDS 104. The D-channel also carries signaling messages (X.25 packets) between the VAPs 103A and 103B and the NSP 106. An X.25 packet connection is used to  
10   interconnect LDS 104 to NSP 106 and carry packets routed by the LDS 104 between the VAPs 103A and 103B and the NSP 106. The connection to the LDS 104 is not limited to a X.25 data packet connection, but may be any connection supported by the LDS 104, and having an interworking function with the X.25 protocol. These packets contain messages pertaining to call processing of the IS-136 interface as well as OA&M messages on the  
15   VAPs.

      In one exemplary operation of the WCS, when a call arrives at the subscriber's desktop phone 109, if the user does not answer, the switch will use AIN triggers to request additional routing instructions from the NSP 106. The NSP 106 will locate the subscriber's MS 101 and direct the LDS 104 to forward the call to the VAP 103 servicing the  
20   subscriber's MS 101. The NSP 106 will also inform the VAP 103 of the incoming call via messaging on the D-channel and direct the VAP 103 to establish the IS-136 air link to the MS 101 in order to alert the user. When the user answers on their MS 101, the call is completed over the VAP's 103 ISDN B-channel and the IS-136 air interface.

In accordance with the principles of the invention, whenever a subscriber originates a call, the NSP will work in conjunction with the LDS 104 and the VAP to establish the RF link and the ISDN B-channel connectivity to the switch. The switch will then route the call to the proper destination. When a subscriber moves from picocell (e.g., VAP 103A service area) to picocell (e.g., VAP 103B service area), the NSP 106 will inter-work with the switch and the VAPs and use the ISDN Directed Call Pickup with Barge-In to enable the seamless handoff. For example, when the MS 101A is on an active call served by VAP 103A, and is moving into the region served by VAP 103B, the NSP 106 will direct VAP 103B to barge-in on the call on VAP 103A. This temporarily establishes a 3-way call and the NSP 106 will then direct VAP 103A to disconnect from the call, thereby leaving the active call to be served by VAP 103B and completing the handoff. This is advantageous since the procedure ensures that there is no noticeable interruption of the call on the network side.

In accordance with the principles of the instant invention, an exemplary network platform architecture of a wireless centrex system (WCS) is illustrated in Figure 1. The wireless centrex system disclosed therein, functions as a private wireless system which is not interconnected to a public macro cellular system. However, the WCS system could also be interconnected to a public macro cellular system. The wireless access platform provides a cordless-like, anywhere, anytime communications for indoor, business or campus-type environments. The key system elements of the WCS platform architecture are the Local Digital Switch (LDS) 104, the Remote Digital Terminal (RDT) 102, the Network Server Platform (NSP) 106, and a wireless interface including one or more of a plurality of Voice Access Ports (VAP) 103A and 103B and one or more of a plurality of IS-136 Digital TDMA Cellular/PCS Mobile Stations 101A and 101B. Although figure 1 illustrates the VAPs 103A

and 103B being connected to the RDT 102, the VAPs 103A and 103B may also be connected via ISDN BRI lines directly to the LDS 104, bypassing the RDT 102.

The WCS system of this embodiment may have, for example, the following design attributes. There is one NSP 106 per LDS 104, although there could be more than one LDS 104 per NSP 106. The NSPs, (e.g., NSP 106 and NSP 106A), are interconnected for inter-  
5 signaling using TCP/IP across an intranet, e.g., AT&T intranet 112. Centrex services and features are provided via the LDSs, (e.g., LDS 104 and LDS 104A) and an SS7 network 111. A single RDT 102 can provide interconnection of VAPs 103 for the WCS in a single large WCS office or multiple smaller offices as long as an ISDN BRI connection can be  
10 made to the VAPs 103. Further, the WCS system of this embodiment provides smooth handoffs between VAPs 103 using the ISDN Direct Call Pickup with Barge-In (DPU) function. Finally, the WCS system can provide a secure wireless network by only recognizing pre-approved subscribers MS 101 for registration within the picocell area covered by each of its VAPs 103; all other cellular phones within the picocell are prohibited  
15 from reception/transmission with the VAP's 103.

The LDS 104 is a TR-08 and/or a GR-303 compatible LDS 104 which employs distributed intelligence, process-oriented software, and coordinated autonomous computing elements to provide a flexible, modular, reliable and robust digital switching system. LDS 104 has generic ISDN switching functions with embedded AIN capabilities and provides  
20 network synchronization. The Lucent 5ESS and the Northern Telecom DMS-100 are exemplary Local Digital Switch (LDSs). The LDS 104 provides a single platform for advanced services including ISDN, Centrex, CLASS, Custom Calling, Advanced Intelligent Network (AIN), and basic bearer Channel (B Channel) call feature applications capabilities.

It supports both X.25 packet switched data communication and circuit switched data using, for example, an X.25 Packet Assembler Disassembler (PAD) for signaling between NSP 106 and subtending VAPs (e.g., VAP 103A and VAP 103B). The LDS 104 provides the switching fabric, administration, message switching, and call switching functions. The AIN capabilities on the LDS 104 provides AIN software that enables the network provider to create, deploy, and change services to meet customers' requests. The AIN software allows the LDS 104 to act as an AIN Service Switching Point (SSP) to communicate with Service Control Points (SCP) (i.e. NSP 106 in the WCS configuration), and Intelligent Peripherals. This gives the NSP 106 the flexibility to manage call processing on the LDS 104. The events which activate the AIN triggers must be provisioned so that they occur at specified points in a call where call processing may be interrupted, in order to interact with the NSP 106. Additionally, the LDS 104 provides a gateway to a PSTN 125.

The Remote Digital Terminal (RDT 102) is a digital loop carrier terminal which supports POTS, ISDN, high-speed transport, and all special services – including private lines and PBX trunks. RDT 102 provides voice, data, and signaling transport and multiplexing of business premise telephony equipment such as the ISDN phone 109, POTS phone 108, and VAPs 103A and 103B. The Lucent SLC-2000 (pronounced "Slick" 2000) and the Nortel Access Node are exemplary RDTs. The RDT 102 interfaces digitally with the central office (CO), using, for example a TR-08 or GR-303 trunk configuration, connected with the LDS 104 such as a Lucent 5ESS or a Nortel DMS-1000. The RDT 102 provides the distribution of service interfaces between the LDS 104 and the customer premises, thereby extending the digital access network.

The exemplary NSP 106 provides control functionality for VAP 103A and 103B, which includes mobile station and mobility management, call control such as handoff, wired and wireless interworking such as DN and MIN mapping, signaling processing interface and management, AIN for call processing, service creation and management and feature applications, along with related OAM&P functions. The NSP 106 is also responsible for Network Intelligence and resource management including RF management (e.g., SC), validation or authentication, registration, and Message Center operation and control.

An illustrative NSP is described in co-pending U.S. patent application serial no. 09/100,360 entitled "Hybrid Fiber Twisted Pair Local Loop Network Service Architecture" by Gerszberg et al., which is herein incorporated by reference. While the NSP described by Gerszberg et al. is not for a wireless centrex system, it can be modified to work in the WCS of the present invention. In the WCS environment, the NSP 106 may include NSP specific software operating on a high performance, general purpose computer, for example, a SUN SPARC Enterprise server E3500.

The exemplary Voice Access Ports (VAPs) 103A and 103B are pico-cellular intelligent base stations or radio transceiver ports that support, for example, the IS-136 air interface with IS-136 mobile stations such as digital TDMA cellular/PCS communications units 101a, 101b. IS-136 is the EIA/TIA Interim Standard that addresses digital cellular and PCS (personal communications services) systems employing time division multiple access (TDMA). IS-136 specifies a DCCH (Digital Control Channel) to support new features controlled by a signaling and control channel between a cell site (e.g., radio base station) and terminal equipment (e.g., mobile station). The IS-136 air interface between the VAPs 103a, 103b and mobile stations MS 101a, MS 101b can support voice and messaging



applications. The mobile stations MS 101a, MS 101b, etc., may be, but are not limited to, a terminal or a typical cellular/mobile phone having a keypad, display screen, and an alarm generator for generating a ringing or tone sound.

The VAPs support plug-and-play operations by connecting to RDT 102 via standard open interfaces, such as ISDN BRI. In one embodiment, the VAPs 103A and 103B use advanced digital software radio technology for superior RF performance. Additionally, VAPs 103A and 103B may employ self configuration algorithms for "stacked spectrum" operations. United States patents 5,809,423, 5,787,352, 5,740,536, 5,404,574, and 5,345,499 describe exemplary algorithms and related methodologies that may be utilized in self configuration for "stacked spectrum" applications. The VAPs also administer resource management.

The mobile stations (MS) 101A and 101B provide the WCS subscriber with cordless-like services feature/function, thereby permitting user mobility within the WCS service coverage area. The IS-136 digital TDMA cellular/PCS mobile stations 101A and 101B, may include, for example the Nokia 2160 and the Ericsson DH368 TDMA digital telephones. One significant advantage of the instant invention is that a base station may be interconnected to a switch via an open standard interface, such as ISDN BRI, so that traditional wireline services, such as centrex type services features/functions like call hold, call forward, call waiting, call transfer, speed calling, caller ID, three party (conference) calling, etc., may be offered to MS 101.

In one exemplary embodiment of the WCS, there are five major interfaces as illustrated in figure 1. With reference to figure 1, interface 1, connects the LDS 104 to the RDT 102 using, for example, the Bellcore standard GR303 interface. The GR303 standard

defines digital transmission facility interfaces such as DS1 and SONET, concentration options between the integrated digital terminal/switch (IDT) 105 and the RDT 102, signaling options, and call processing and operations data links. The transport media for this interface can be, for example, metallic or fiber-optic. Exemplary metallic media include T1, 5 ISDN/PRI and DS3, while exemplary fiber-optic media include SONET OC3 and OC12 links. Interface 1 carries the voice traffic of a telephone call, as well as the signaling traffic for the LDS 104 and the NSP 106.

Interface 2, connects the VAPs 103A and 103B to the RDT 102 with, for example, ISDN/BRI lines (2B+D channels), using the Q.931 signaling protocol on the D-channel to 10 setup the voice connection on the B-channel. In this case, the RDT acts only as a transport for the signaling and data message to the LDS 104. WCS call processing messages for call setup, call teardown, feature applications on the RF (IS-136) and OAM&P messages are carried over X.25 packet, interface 4, on the D-channel between the NSP 106 and the VAPs 103A and 103B, via the LDS 104 and the RDT 102. These messages are sent to the LDS 15 104, which routes them to the NSP 106. Voice connections between the VAPs 103A and 103B and the LDS 104 are carried on the B-channel via the RDT 102. Additionally, software downloads from the NSP 106 are also carried on the D-channel or B-channel to the VAPs 103A and 103B via the LDS 104 and the RDT 102. In one exemplary embodiment, the RDT 102 acts as a concentrator and its operation is transparent to the operation the 20 WCS.

Interface 3, may be, for example, an IS-136 air interface between the VAPs 103A and 103B and the MSs 101A and 101B supporting voice and messaging applications.

Interface 4 is, for example, an X.25 protocol link between the NSP 106 and the LDS 104.

Call control and OAM&P messages between the NSP 106 and the VAPs 103A and 103b are carried on the D-channel of interface 2 through interface 1, through the LDS 104 , and over this X.25 link.

Interface 5 may be, for example, an SS7 link connecting the NSP 106 and the LDS 104. This exemplary interface carries AIN messages which are generated by the LDS 104, sent to the NSP 106 for processing, and sent back to the LDS 104 to instruct the LDS 104 how to route the call properly. Interface 5 carries AIN messages from the LDS 104 which notify the NSP 106 of AIN trigger events. It also carries responses from the NSP 106 to the LDS 104 which instructs the LDS 104 how to properly route calls to the WCS subscribers.

When the IS-136 cellular/PCS mobile stations 101A and 101B are located within the WCS system coverage area, MIN-based calls to the public cellular network destined for mobile stations 101A and 101B may not be delivered in the WCS service area. Instead, the IS-136 phones can be associated with the DN of a stationary phone (e.g., POTS 108 or ISDN 109) within the WCS services area so that the LDS 104 delivers the call to either the subscriber's MS 101 or the subscriber's stationary phone using the DN. On the other hand, when the subscriber's mobile station MS 101 is located outside the WCS service area, calls are delivered to the mobile stations through the MIN provided in the public cellular system.

After a simple registration process, the WCS subscribers use their IS-136 digital TDMA cellular/PCS phone 101A or 101B as a cordless-like telephone within the wireless centrex service area without incurring air-time charges. Typically, when an incoming call destined for a WCS subscriber's DN reaches the LDS 104, and the DN was previously provisioned for AIN treatment, an AIN trigger occurs in the LDS and an AIN query message is sent to the NSP 106. In one embodiment, each WCS subscriber has a reachable desktop

DN and each DN will be programmed for the AIN trigger in the LDS 104 for call routing purposes. The NSP 106 provides appropriate routing instructions to the LDS 104 for delivery of the incoming call. The NSP 106 can locate and alert the subscriber's mobile station and direct the LDS 104 to route the incoming call to the mobile station (MS 101). If the subscriber does not answer, the NSP 106 may direct the LDS 104 to route the incoming call to a Voice Message System (VMS) 107, which ultimately answers the call. An exemplary VMS is the Lucent Conversant Model MAP/100C (MultiAccess Platform). Calls initiated from a stationary phone such as POTS 108 or ISDN 109, or mobile station 101 within the WCS service area are sent to the LDS 104 that can handle the call or route the call to the PSTN 125.

The WCS is a self-configurable indoor wireless system that applies the "stacked spectrum" concept. It can detect (sniff) and designate unused and interference-free DTC/DCCH (Digital Traffic Channel/Digital Control Channel) from the overlayed (e.g., macro or micro) cellular system, for its own use, based on the unique WCS private systems number (PSID). The DTC is defined in IS-136 as the portion of the air interface which carries the actual data transmitted (e.g., the voice channel). It operates over frequencies separate from the DCCH, which are used for signaling and control purposes. Since the WCS coexists with public macro or micro cellular networks, it monitors the RF channel activities, detect unused and interference-free channels, and makes channel selections and adjustments in real time for interference-free operation.

Another exemplary network architecture of the WCS is illustrated in Figure 2. The WCS system may be installed at the satellite site (e.g., Customer Site B) 201 as well as the main site (e.g., Customer Site A) 202. When a subscriber is provisioned for service, the

Customer Service Center (CSC) 113 downloads the subscriber's profile to all NSPs 106 (e.g., 106A and 106B). The subscriber is allowed to roam between the customer sites 201 and 202. In one exemplary embodiment, the NSPs 106A and 106B are interconnected through the provider Intranet 112, for example, AT&T Intranet. However, the NSP's 106A and 106B may be interconnected through any secure virtual network from any provider.

In the WCS, a call is delivered by the Local Digital Switch 104A or 104B using the DN. Unlike normal wireline phone services, however, the location of the WCS subscriber changes continuously with movement of the MS 101 within the service area. Therefore, a special intelligent delivery mechanism using Advanced Intelligent Network (AIN) has been developed for the WCS call delivery. In the AIN architecture, the Service Switching Point (SSP), here the LDS 104A and 104B has the capability of determining which calls require AIN services based on the dialed DN. The process of identifying calls that require AIN processing is known as "triggering," since a particular characteristic of the call "triggers" the switch into providing AIN call treatment. So, when the DNs of ISDN telephone 109 or POTS telephone 108 are provisioned as WCS DNs, an incoming call to these DNs will prompt an AIN trigger. Once an event causing a trigger occurs, a query message is sent to the Service Control Point (SCP) as illustrated in figures 5, 6 and 7. The SCP is, for example, NSP 106. Based on the information contained in the query message, the SCP (NSP 106A or 106B) determines which service is being requested and provides appropriate information to the LDSs 104A or 104B. In the exemplary WCS architecture, all the routing information is stored in the NSPs 106A and 106B. Therefore, the LDSs 104A and 104B in the WCS sends the query message to the NSPs 106A and 106B, and the NSPs 106A and

106B directs the LDS 104A and 104B to deliver the call to its appropriate destination. A detailed description of mobile station registration in the WCS follows.

### III. Mobile Station Registration

5 Figure 3 shows an exemplary embodiment of a registration process used to register a MS 101 when the MS 101 enters a WCS service region (e.g., customer site B 201). Upon entering the WCS system service area, the MS 101 automatically registers with the NSP 106 serving that customer site. The NSPs 106A and 106B contain the subscriber profiles distributed by the Customer Service Center 113 (CSC). The NSP (204A or 204B) handling  
10 the call then validates the MS 101 by examining the subscriber profile for that MS 101. If the subscriber is roaming to another Customer Site, the Serving NSP 106B notifies the Home NSP 106A that the subscriber is registered in its (Serving NSP's 106B) service area.

In particular, when the MS 101 is powered on, an IS-136 Registration message 307 is sent to the VAP 103. The VAP 103 then forwards the registration notification message  
15 308 to the serving NSP 106B. The serving NSP 106B validates the subscriber by looking up the subscriber information stored locally and previously downloaded from the customer service center (CSC) 113. If the NSP 106 was not the subscriber's Home NSP 106A, then a registration notice message REGNOT 309 would be sent to the Home NSP 106A for the MS 101 indicating that MS 101 was registered now in serving NSP 106B's area. The Home  
20 NSP 106A would then store the roaming information of the MS 101, and send regnot message 310 to the Serving NSP 106B for acknowledgment. However, with the assumption that the Home NSP 106A was indeed the actual Home NSP of the MS 101, then the Home NSP 106A sends a regnot message 310 to Serving NSP 106B. If the Home NSP 106A

found that the MS 101 had been registered at another NSP, e.g., Old NSP 106C, and had left without proper de-registration, then the Home NSP 106A would send a registration cancellation message REGCANC, 311, to cancel the previous registration at the Old NSP 106C for confirmation. The Old NSP 106C would then remove the records for the MS 101 from its memory, and send a registration cancellation response message, regcanc, 312, back to the Home NSP 106A. However, assuming that Home NSP 106A had sent the regnot 310 message to Serving NSP 106B, then Serving NSP 106B would send a registration acceptance message, Registration Accept, 313, to VAP 103. The VAP 103 then informs MS 101 that the registration is completed, by sending IS-136 registration acceptance message, Registration Accept 314, to MS 101. This completes the registration process for MS 101. Registration in the MS 101 Home NSP 106A is simpler requiring only steps a and d illustrated in Fig. 3.

#### IV. Call Origination From A Mobile Station

Figure 4 shows an exemplary call origination from a MS 101 directed to a PSTN 125 DN. When the subscriber MS 101 places a call via an origination message, IS-136 Origination 407, the VAP 103 first checks the validity of the MS 101 with NSP 106 via Origination Request 408. The NSP 106 then provides the VAP 103 with an Origination ACK 409 message indicating that the MS 101 is recognized and the VAP 103 may go forward with the call origination. After that, the VAP 106 sets up an ISDN connection, ISDN Set up 410, to LDS 104. The LDS 104 performs the dialed digit analysis and proceeds with the call delivery procedures concluding in a connected call to the PSTN 125 DN.

More specifically, the MS 101 dials a DN number and sends an IS-136 Origination 407 message to VAP 103. VAP 103 then sends an Origination Request 408 message to NSP 106. After checking the appropriate databases to determine if the MS 101 is a valid registered subscriber, NSP 106 returns an Origination ACK 409 message to VAP 103. The VAP 103 then reserves a RF DTC channel and sends an ISDN Q.931 Setup 410 message to the LDS 104. The LDS 104 then performs a dialed digit analysis and sends an ISUP IAM 411 message to a far end switch in the PSTN 125 for end-to-end connectivity. The LDS 104 also sends an ISDN (Q.931) Call Proceeding 412 message to the VAP 103. The VAP 103 then sends an IS-136 Digital Traffic Channel (DTC) Designation 413 message to the MS 101 so that MS 101 may then tune to the designated traffic channel. MS 101 indicates to VAP 103 that it is using the designated DTC by responding with an MS on DTC 414 message. The VAP 103 then detecting that the MS 101 is tuned to the designated traffic channel, cuts through the voice path between RF DTC channel and ISDN B channel.

After receiving the ISUP ACM 415 message from the destination switch in the PSTN 125, the LDS 104 sends an ISDN Alerting 416 message to VAP 103. Next, the Ringback Tone 421 is delivered to the MS 101 from the destination switch. When receiving ISUP ANM 417 message from the PSTN 125, the LDS 104 sends an ISDN Connect 418 message to VAP 103, removes the ringback tone, and cuts through voice path 422. The VAP 103 then sends an ISDN Connect ACK 419 message back to the LDS 104. After connection of the voice path 422, the VAP 103 sends a Connected 420 message to the NSP 106 for billing and other OAM&P purposes.

## V. Incoming Call Termination



Exemplary call flow diagrams illustrating various call termination (incoming call connection) scenarios for the WCS system are illustrated in figures 5 through 7. When provisioning the necessary parameters for the subscriber, the WCS subscriber's DN is provisioned for the AIN Termination Attempt Trigger (TAT) so that the subscriber's mobile station is the first destination determined for incoming call termination. Consequently, when a call to the subscriber's DN is received, it triggers the LDS 104 to send a call treatment query message to the NSP 106. The TAT call treatment procedure in the NSP 106 will direct the LDS 104 to deliver the call to its appropriate destination. The DN in the VAP 103 that is used to deliver the call to the MS 101 is referred to as the Forward Directory Number (FDN).

Depending on the first call delivery destination, there may be two different call termination scenarios. The first scenario involves delivering the call first to a tip ring (T/R) desktop phone 108 (POTs) or an ISDN phone 109, while the second involves delivering a call first to a mobile station 101. In each scenario, a different AIN trigger is utilized, and the call termination may be implemented using one of the two scenarios. The latter scenario of delivering the call to a mobile station will be utilized to exemplify the procedure.

The TAT call treatment procedure in the NSP 106 will direct the LDS 104 to deliver the call to the subscriber MS's current location. If there is no answer from the MS 101 phone, the call is delivered to the subscriber's desktop phone (e.g., POTs 108 or ISDN 109). In one exemplary embodiment, once the call is forwarded to the MS 101 DN (FDN), the call follows the Originating Call Model (OCM) rather than the Terminating Call Model (TCM), and an O\_No\_Answer trigger can be used rather than a T\_No\_Answer trigger. In yet another embodiment, the T\_No\_Answer trigger could be used to deliver the call to the desk

top phone first, and if the call goes unanswered, the trigger can be used to request additional routing information from the NSP 106. The NSP 106 would then locate the MS 101 and instruct the LDS 104 how to deliver the call.

An exemplary call flow of a termination wherein the incoming call is routed from the PSTN 125 to MS 101 is illustrated in Figure 5. As previously illustrated in Fig. 4, if the call is originated from the MS 101 or desktop phone (e.g., 108 or 109) inside a region handled by the same LDS 104, the resulting call flow would be similar, except that there will be appropriate ISDN Q.931 messages to and from the LDS 104 instead of the ISUP messages between the PSTN 125 and the LDS 104. The following illustration shows an incoming call to a MS 101 that answers the call.

The PSTN 125 user first dials the DN of a WCS subscriber. The LDS 104 then receives an ISUP IAM 508 message from the PSTN 125. The LDS 104 recognizes that the DN is provisioned for AIN Termination Attempt Trigger (TAT). The LDS 104 then suspends the delivery of the call and sends an AIN query message, TCAP (AIN termination attempt [DN]) 509, to the NSP 106 for an appropriate routing instruction. The NSP 106 recognizes that the subscriber's MS 101 is active in its serving area, and sends a page message, Page 510, to the VAP 103 serving MS 101. The VAP 103 in turn sends an IS-136 Page 528 message to the MS 101. The MS 101 responds to the IS-136 Page 528 via a IS-136 Page Response 529 message destined to VAP 103. VAP 103 then sends a Page Response 511 message to the NSP 106. The NSP 106 then directs LDS 104 to forward the call to the Forward Directory Number (FDN), TCAP (AIN Forward\_Call [FDN], NEL [O\_No\_Answer]) 512 of the VAP 103 serving the MS 101 (in a TCAP Conversation package). The NSP 106 also indicates its interest in event (O\_No\_Answer for FDN) by

66ET2T-04885450

sending next event list NEL [O\_No\_Answer]) 532 information to the LDS 104 in a Request component that accompanies the Routing component, in a conversation package. The LDS 104 then starts a No Answer Timer (T(NoAnswer)) 531 for FDN and sends an ISDN (Q.931) Setup 513 message to the VAP 103. The VAP 103 then sends a Digital Traffic Channel (DTC) Designation 530 message to the MS 101 along with an ISDN (Q.931) Call Proceeding 514 message to the LDS 104. The MS 101 then tunes to the traffic channel and responds to the VAP 103 with MS 101 on DTC 515. The VAP 103 detects that the MS 101 is on the appropriate traffic channel. The VAP 103 then alerts MS 101 with an Alert-with-info 516 message and MS 101 acknowledges with a Mobile ACK 517 message. The VAP 103 then sends an ISDN Alerting 518 message to LDS 104.

Upon receiving ISDN (Q.931) Alerting 518 message, the LDS 104 then sends an ISUP ACM message 519 to the switch in PSTN 125. In the meantime, the LDS 104 is sending a ringback tone 520 to the PSTN 125 caller. When the MS 101 answers (before T(NoAnswer) 531 expires), the VAP 103 sends an ISDN Connect message 522 to the LDS 104 in response to the Connect 521 message from MS 101. The LDS 104 then cancels T(NoAnswer) 531, and sends ISUP ANM 523 message to the PSTN 125 switch and cuts through the voice path 527. After the LDS 104 sends an ISDN (Q.931) Connect ACK 524 message to the VAP 103, it then sends TCAP (AIN Close) 525 message to the NSP 106 (using TCAP Response) to complete the TCAP transaction. After receiving the ISDN (Q.931) Connect ACK message 534 from the LDS 104, the VAP 103 sends Connected 526 message to the NSP 106 for billing and other OAM&P purposes. At this point, voice path 527 has been established and the call proceeds between the PSTN 125 caller and the MS 101 subscriber until it is ended and disconnected (e.g., hang up).

In accordance with the instant invention, figure 6 shows a process wherein an incoming call goes unanswered by the mobile station, e.g., MS 101, and the No Answer Timer 531 expires. Whenever, a call destined for a MS 101 goes unanswered and the No Answer Timer 531 expires, the NSP 106 will direct the call to the DN (telephone or VMS) which is associated with that MS 101.

The PSTN 125 user first dials the DN of a WCS subscriber. The LDS 104 receives ISUP IAM 508 message from the PSTN 125. The LDS 104 will recognize that the DN is associated with MS 101 and is provisioned for AIN Termination Attempt Trigger (TAT). The LDS 104 then suspends the delivery of the call and sends an AIN query message, TCAP (AIN Termination Attempt [DN] 509), to NSP 106 for an appropriate routing instruction. The NSP 106 will recognize that the subscriber's MS 101 is active in its serving area, and will send Page 510 message to the VAP 103 serving MS 101. The VAP 103 in turns sends IS-136 Page 528 message to MS 101. The MS 101 will respond to the IS-136 Page 528 message via Page Response 529 message destined to VAP 103. The VAP 103 then sends Page Response 511 message to the NSP 106. The NSP 106 then directs the LDS 104 to forward the call to the Forward Directory Number (FDN) of the VAP 103 serving the MS 101 (in a TCAP Conversation package) by sending the TCAP (AIN Forward Call [FDN], NEL [O\_No\_Answer]) 512 message to the LDS 104. The NSP 106 also indicates its interest in event O\_No\_Answer for FDN by sending next event list (NEL) information to the LDS 104 in a Request component accompanying the Routing component of a conversation package message 512. The LDS 104 then starts a No Answer Timer (T(NoAnswer)) 531 for FDN and sends ISDN (Q.931) Setup 513 message to the VAP 103. The VAP 103 then sends Digital Traffic Channel (DTC) Designation 530 message to MS 101 and sends a ISDN

(Q.931) Call Proceeding 514 message to the LDS 104. The MS 101 then tunes to the designated traffic channel and sends the MS 101 on DTC 515 message to VAP 103. The VAP 103 then detects the MS 101 on the traffic channel and alerts the MS 101 with an IS-136 Alert-with-info 516 message the MS 101 responds by acknowledging with a Mobile ACK 517 message. The VAP 103 then sends ISDN Alerting 518 message to the LDS 104. Upon receiving the ISDN (Q.931) Alerting 518 message, the LDS 104 then sends an ISUP ACM 519 message to the switch in PSTN 125. In the meantime, the LDS 104 is sending a ringback tone 520 to the caller.

In this case, the MS 101 does not answer the call and the No Answer Timer T (No Answer) 531 expires. The LDS 104 then sends AIN O\_No\_Answer 625 message to the NSP 106 in a conversation package. The NSP 106 sends a TCAP (AIN Analyze\_Route [DN]) 626 message to the LDS 104. Then the LDS 104 sends a TCAP (AIN Termination\_Attempt [DN]) 635 message back to the NSP 106, which authorizes the call termination to the DN by sending an TCAP (AIN Authorize\_Term) 636 message to the LDS 104. The LDS 104 then sends an ISDN (Q.931) Disconnect 627 message to the VAP 103. The VAP 103 then sends a Release 628 command to the MS 101 and the MS 101 stops ringing (buzzing or alert the user). The MS 101 then sends Mobile ACK 629 back to the VAP 103. The VAP 103 now sends ISDN (Q.931) Release 630 message to LDS 104 to notify the LDS that MS 101 is no longer being alerted of the incoming call. The LDS 104 then sends ISDN (Q.931) Release Complete 631 message to the VAP 103 allowing MS 101 to be used for other calls or messages. When the NSP 106 instructs the LDS 104 to forward the call to the DN 626, the call processing is assumed by the LDS 104 as a normal call delivery in step 632 . If the user subscribes to VMS 107, then after a certain number of

rings, the LDS 104 will transfer the call to the VMS 107. The incoming call will thus be forwarded to the telephone (ISDN 109 or POTS 108) associated with the DN being called.

In accordance with the instant invention, an exemplary methodology of terminating an incoming call to a roaming subscriber located in another LDS area is illustrated in figure

5 7. The WCS subscriber's DN is provisioned for the AIN Termination Attempt Trigger (TAT) so as to seek out the subscriber's MS first. In general, when a call to the subscriber's DN arrives at the LDS 104, the call triggers the LDS 104 to send a call treatment query message to NSP 106. The NSP 106 will recognize that the MS 101 is currently registered in another Customer Site (different LDS area) and will request a Forward Directory Number 10 (FDN) from the visited area, Serving NSP 106B. The Serving NSP 106B then checks the current location of the MS 101 and the availability of circuits to handle the call and returns an FDN to the Home NSP 106A. After receiving the FDN, the TAT call treatment procedure in the Home NSP 106A directs the LDS 104A to deliver the call to the FDN. After sending the ISUP IAM to the FDN, the Serving LDS 104B delivers the call to the 15 VAP 103 presently serving the MS 101.

More particularly, a call termination occurs as follows when a MS 101 is roaming to another Customer Site, e.g., Site B 201, when the MS 101 has a home location within Customer Site A 202. The PSTN 125 user dials a WCS subscriber's DN associated with a subscriber in Customer Site A. The Home LDS 104A (LDS-A) receives an ISUP IAM 709 20 message from the PSTN 125. The LDS-A 104A finds that the DN is provisioned for AIN Termination Attempt Trigger (TAT) and suspends the delivery of the call, sending AIN Termination\_Attempt Query 710 message to the NSP-A 106A for an appropriate routing instruction. The NSP-A 106A will recognize that the subscriber is not presently registered

in its serving area but is now registered in Customer Site B 201. The NSP-A 106A will send ROUTREQ 711 message to the Serving NSP (NSP-B) 106B. After receiving the ROUTREQ 711 message, the NSP-B 106B sends Page 712 message to the VAP 103 presently serving the MS 101. The VAP 103 will then send an IS-136 Page 713 message to the MS 101 and the MS 101 will respond with an IS-136 Page Response 714 message destined for the VAP 103. The VAP 103 will then send the Page Response 715 message to the NSP-B 106B. The NSP-B 106B will confirm the current location of the MS 101, and return the Forward Directory Number (FDN), in the routreq 716 message to the NSP-A 106A. The NSP-A 106A will then direct the LDS-A 104A to forward the call to FDN in Customer Site B via a TCAP (AIN Forward\_Call [FDN], NEL[O\_No\_Answer]) 717 message. The LDS-A 106A then forwards an ISUP IAM [FDN] 718 message to the LDS-B 104B. After receiving the ISUP IAM [FDN] 718 message, LDS-B 104B then sends an ISDN (Q.931) Setup 719 message to the VAP 103 serving the FDN. VAP 103 sends the DTC Designation 720 message to the MS 101, and then sends an ISDN (Q.931) Call Proceeding 721 message to the LDS-B 104B. When the MS 101 tunes to the DTC it sends an MS on DTC 722 message to VAP 103 and VAP 103 responds with an Alert-with-info 723 message. The MS 101 will then send a Mobile ACK 724 message to the VAP 103 and the VAP 103 will then send an ISDN (Q.931) Alerting 725 message to the LDS-B 104B. The LDS-B 104B will then send an ISUP ACM 726 message to the LDS-A 104A, which will in turn forward a ISUP ACM 727 message to the switch in PSTN 125. The LDS-B 104B provides the Ringback Tone 728 to the caller.

When the MS 101 answers, the MS 101 will send Connect 729 message to the VAP 103. The VAP 103 will then send an ISDN (Q.931) Connect 730 message to the LDS-B

104B. The LDS-B 104B will then send an ISUP ANM 731 message to the LDS-A 104A, which then forwards ISUP ANM 733 to the switch in PSTN 125, and an ISDN Connect ACK 732 message to VAP 103. After receiving an ISDN (Q.931) Connect ACK 732 message from LDS-B 104B, the VAP 103 will send a Connected 734 message to the NSP-B 106B for billing and other OAM&P purposes.

If the MS does not answer, the call is delivered to the desktop phone or to the VMS 107 if the MS 101 subscriber has voice mail capabilities, by the same mechanism using the NEL [O\_No\_Answer], as in the non-roaming case (see Fig. 6). Otherwise, at this point, voice path 735 is established.

## VI. Intra-LDS Mobile Station Assisted Handoff

In accordance with the invention, an exemplary embodiment of an intra-LDS mobile assisted handoff (MAHO) process is illustrated in Figure 8. The signaling flow in Fig. 8 discloses the handoff of a call between the VAPs (e.g., VAPo 103A and VAPn103B) served by the same LDS 104. The smooth/lossless handoff is accomplished by using the Directed Call Pickup with Barge-in (DPU) feature supported by many switches. A discussion of the process follows.

While a call 806 involving the served MS 101 is in progress, the VAPo 103A detects a handoff condition based on the measured channel qualities and their threshold value. The VAPo 103A initiates a Measurement order 807 destined for MS 101. The MS 101 then responds to the Measurement order 807 with a Measurement order ACK 808 and a Channel Quality Message 809 destined for VAPo 103A. When VAPo 103A detects a handoff condition, it then sends a Handoff Request 810 to the NSP 106 with a list of candidate



channels. The NSP 106 then selects the best candidate channel, identifies VAPn 103B as serving the channel, and sends a Handoff Preparation [MSID, DN-VAPo] 811 message to VAPn 103B.

Upon receiving the order from NSP 106, VAPn 103B reserves a B-channel and a RF  
5 channel for the MS 101, and establishes a 3-way call using the DPU feature. VAPn 103B then sends ISDN (Q.931) Setup [Feature Activation (DPU), DN-VAPo] 812 message to LDS 104. LDS 104 then returns an ISDN (Q.931) Call Proceeding 813 message to the VAPn 103B, followed by an ISDN (Q.931) Connect 814 message. The VAPn 103B then responds to the LDS 104 with an ISDN (Q.931) Connect ACK 815 message. The VAPn  
10 103B then sends a Handoff Directive 816 message to VAPo 103A. The VAPo 103A then sends the Handoff order 817 to the MS 101 requesting MS 101 to retune to the new RF channel of VAPn 103B, and disconnects its ISDN connection to the LDS 104 as shown in steps 818-823. The MS 101 is then placed on the new channel with VAPn 103B per step 824. The VAPn 103B sends a message Handoff Result 825, to the NSP 106, which  
15 indicates that the MS 101 has successfully been handed off to the new channel, indicated as handoff complete.

In yet another embodiment of the invention, a user on a wireline telephone call can have the capability of transferring that call to his/her cellular/PCS MS. In accordance with this feature, a user on a wireline telephone with an active call may enter a special feature  
20 code, such as \*99, in order to activate the feature.

The following is a more detailed description of an exemplary intra-LDS mobile assisted handoff as previously described and as depicted in Fig. 8. Initially, there is an existing call involving the served MS 101 in progress. The VAPo 103A sends a

Measurement order 807 over the FACCH to the MS 101 to measure the BER (bit error rate) and RSSI (received signal/strength indicator) of the current channel and the RSSIs of other RF channels. The MS 101 acknowledges the Measurement order 807 by sending a Measurement order ACK 808 over the FACCH. The MS 101 then performs the channel  
5 quality measurements in response to the Measurement order 807 and sends a Channel Quality message 809 to the VAPo 103A.

Next, the VAPo 103A detects a handoff condition based on the received Channel Quality Message 809 and the associated threshold values. The VAPo 103A then sends a Handoff Request 810 message to NSP 106 with a list of candidate channels, and  
10 immediately starts its handoff request timer (T1). Upon receiving the Handoff Request 810 from the VAPo 103A, the NSP 106 selects the candidate with the strongest RSSI. The NSP 106 then checks if the resources (ISDN B-channel and RF channel) are available for the candidate channel, and identifies VAPn 103B as the new VAP which will serve the MS 101. The NSP 106 then sends a Handoff Preparation 811 message, including the serving MSID  
15 and DN-VAPo (the DN of VAPo 103A, i.e., the phone number to be barged in on) to VAPn 103B and immediately starts its handoff preparation timer (T2). In response to the Handoff Preparation 811 message, VAPn 103B then reserves a B-channel and a RF channel for the MS 101 and starts to establish a 3-way call using a DPU process in the following manner.

The VAPn 103B sends a ISDN (Q.931) Setup 812 message to LDS 104, which  
20 includes a Feature Activation code for DPU and DN-VAPo. The LDS 104 then sends the ISDN (Q.931) Call Proceeding 813 message back to the VAPn 103B followed by an ISDN (Q.931) Connect 814 message when the call is connected to DN-VAPo. The VAPn 103B then sends the ISDN (Q.931) Connect ACK 815 message to LDS 104. The VAPn 103B

then sends a Handoff Directive message 816 to the VAPo 103A. The VAPo 103A cancels the T1 timer, and sends the Handoff order 817 to the served MS 101 over the FACCH, requesting the MS 101 to retune to the new RF channel (along with other channel assignment information). The MS 101 then acknowledges the Handoff order with a Handoff ACK 818 to VAPo 103A. Upon receiving the Handoff ACK 818, the VAPo 103A then disconnects the B channel connection by sending an ISDN (Q.931) Disconnect 819 message to LDS 104. LDS 104 then sends an ISDN (Q.931) Release 820 message to the VAPo 103A, and the VAPo 103A acknowledges the Release Message 820 and disconnection of the previous call by sending the ISDN (Q.931) Release Complete message 821 to the LDS 104. The VAPo 103A tears down the voice path connection that it had established for the MS 101. The VAPo 103A sends the Handoff Complete 822 message to the NSP 106, which includes the time information of the serving MS 101 for billing and other OA&M purposes. The LDS 104 then starts its handoff complete timer (T3). The NSP 106 responds by sending a Handoff Complete ACK 823 to VAPo 103A, and VAPo 103A cancels T3. The MS 101 then retunes to the new channel of the VAPn 103B. After confirming that the MS 101 has been retuned to the new channel, the VAPn 103B then sends a Handoff Result 825 message to the NSP 106, which indicates that the MS 101 has been successfully handed off to a new channel and timer T2 is cancelled. The NSP 106 acknowledges the handoff complete to both the LDS 104 and the VAPn 103A, using handoff complete 826 message.

## VII. WCS As A Wireless PBX System

In yet another embodiment of the instant invention, there exists a wireless centrex service platform which is a Wireless PBX system (WPS) offering a wireless access system

with customer site wireline ISDN capable PBX to provide integrated wire and wireless voice access. In one application of the system, a WPS as disclosed could be used to enhance the PrimeXpress service offered Teleport Communications Group (TCG, now owned by AT&T). This system could advantageously provide a cordless-like, anywhere, anytime communication in any indoor, business and campus environment using subscriber's macrocellular/PCS mobile station (MS 101). In accordance with the invention, the WPS system includes an Intelligent Wireless Controller (IWC) system 902, its subtending Voice Access Ports (VAPs) 103 and the customer site ISDN capable PBX 901.

Additionally, the WPS also functions as an integrated wireline and wireless system without being connected to any public macro cellular system. Therefore, it does not support mobility management and roaming between WPS and the public macro cellular and PCS networks. In another embodiment, the WCS can connect the NSP 106 to a macrocellular SS7 network to support integrated mobility functions including terminal handoff and personal roaming features.

Further, the WPS provides location and mobility management for the WPS subscriber's mobile station (MS 101) inside the WPS serving area.

After a simple registration process, the WPS subscribers use their IS-136 digital TDMA cellular/PCS phone 101 as a cordless-like phone in the WPS service area without incurring air-time charges. The dual ring feature of the MS 101 allows the user to receive calls anywhere inside the WPS service area. As a result, whenever a user is called at his/her stationary phone 108 attached to the customer premises PBX 901, the WPS system simultaneously locates and alerts the user's IS-136 phone 101. If the user does not answer MS 101, the Voice Message System 109 associated with the customer premises PBX 901

will answer the call. In this embodiment, calls from the stationary phone 108 or the IS-136 phone 101 are directed to the customer site PBX and processed by the TCG PrimeXpress Services. Essentially, the PrimeXpress service is an outbound trunk to a switch 904, such as the Lucent 4ESS, that bypasses the local switch. In the exemplary WPS system, call features include, but are not limited to, Short Message Services (SMS) and/or paging (IS-136 feature); PBX interworking, including premises dialing plan, closed-user-group, and dual ringing of stationary and MS phones; wireline call features, such as three way calling, call forwarding, call transfer, caller ID, call waiting, messaging and voice mail services; support for voice privacy; and cordless-like service without air time charges.

In the embodiment of the invention illustrated in figure 9, there exists an ISDN PRI interface 7, an IS-136 air interface 3, and an ISDN BRI interface 2. The ISDN BRI 2 interconnects VAP 103 and the Intelligent Wireless Controller 902. Call processing messages for call setup, call teardown, feature applications and OAM&P messages are carried on the data D-channel in X.25 packets. In addition to carrying call processing messages, the D-channel also carries ISDN (Q.931) signaling for call setup and teardown of the voice connection on the bearer B-channel. The IS-136 air interface 3, provides communication between the VAP 103 and the MS 101. The ISDN PRI interface 7 interconnects the IWC 902 and the customer premise PBX 901 and utilizes Q.931 signaling. The wireless communications controller's call processing messages for call setup, call teardown, feature applications and OAM&P messages are carried in the D-channel to the NSP 106. The D-channel also carries the Q.931 messages for the voice connections on the B-channels between the VAP 103 and the IWC 902. In one embodiment of the Intelligent Wireless Controller (IWC), there exists an ISDN switch 903 and a controller circuit.

# **VIII. Wireless Voice and Data WCS**

In yet another embodiment of the instant invention, there is a Wireless Communication Service Platform that offers an economical and high performance wireless access network, for satisfying the need for an in-building integrated voice and data system providing mobility. While the exemplary platforms previously disclosed are focused on providing voice capabilities, this embodiment discloses a platform for providing data support integrated with voice capability. There exist at least one Data Access Port (DAP) (e.g., DAP 1001A or DAP 1001B), which is a micro-cellular base station that uses the CelluLAN™ Common Air Interface (IEEE802.11) for high density and seamless in-door coverage providing 4 to 10 Mbps data rate for data applications.

The architecture of the DAP is similar to that previously disclosed for the VAP, and uses digital software radio technology which provides superior RF performance, along with RF based self configuration algorithms for “stacked spectrum” operation. A 10BaseT or 100BaseT Local Area Network (LAN) 1007 connects the DAPs, as well as other LAN devices such as servers, and or local printers, to the Integrated Wireless Communication Controller 1002 (e.g., Integrated Enterprise Wireless Communication (EWC) Controller). In one exemplary embodiment of the Integrated Wireless Communication Controller, the wireless voice and data services are integrated by bundling the PSTN/voice traffic on a trunk 7 to the LDS 104, e.g., 5ESS, and switching the data traffic to an ATM network 1005 for internet/intranet access (ISP 1006). The data and voice could be switched by any suitable means commonly known in the art such as packet switching or circuit switching. A laptop 1003A or 1003B with a PCMCIA card that supports CelluLAN™ CAI, can access the LAN

1007 anywhere inside the building. After the laptop 1003A or 1003B has registered with the LAN 1007, the user can access other PCs, laptops, and or other servers on the LAN, the intranet, and the internet. The user can access this LAN in his office, meeting rooms, the cafeteria, or any area of the building covered by DAPs. Once implemented, the instant  
5 invention would provide the advantage of eliminating the need to wire an individual office for data and/or voice connectivity. The wireless communication service platform would potentially improve overall productivity by giving the users access to their desktop anywhere, anytime. In other words, the instant invention would provide a “desktop to go” environment that would support “moment of value communications” at the time needed  
10 when information is most critical.

In accordance with the invention, there exists a Data Access Ports (DAPs) 1001A and 1001B interconnected to an Integrated Wireless Controller 1002, via interface 8.

Interface 8 is a standard 10/100 BaseT Ethernet connection. This is advantageous in that it provides a flexible interface so that data can be routed via the ethernet interface to a wired  
15 LAN or through an ATM network interface 10 to an ATM network 1005 interconnected to an Internet Service Provider (ISP) 1006. The IEEE 802.11 air interface 9 provides a wireless access to the DAPs 1001A and 1001B. The Data Access Port has exemplary capabilities such as, a high speed LAN access from 4-10 Mbps data rate using the

CelluLAN™ CAI; an IP address assignment during registration; seamless mobility  
20 management including roaming and intra/inter LAN handoffs; data privacy functions to support standard security algorithms; communication support between DAPs and VAPs for SMS, email, paging, and data; and SNMP for OA&M.

6623T-04985460

The exemplary Integrated Wireless Communications Controller 1002 is a single platform controller with Premises Interfaces providing ISDN BRI interfaces 2 and Ethernet interfaces 8 for the VAP and DAP, respectively, and Network Interfaces providing ISDN PRI 7 and ATM for PSTN and ATM network access 10, respectively. The exemplary ATM network interface 10 is data only, and the Ethernet interface can also be used to connect to a wired Local Area Network (LAN). In accordance with the invention, there exist an ISDN PRI interface 7, interconnecting the Integrated Wireless Communications Controller 1002 with a LDS 104. In accordance with the invention, the LDS 104 interconnects to a RDT 102, a NSP 106 and to trunks connected to networks such as the AT&T Local and Long Distance Network 110, the PSTN 125, and the SS7 network 111.

#### IX. Feature Activation/Deactivation

The present invention includes means for feature/function activation/deactivation which is controlled by user input. The NSP 106 contains a dynamic user profile database stored in a memory (see Fig. 12, memory 1240) used to, for example, determine whether a mobile station is authorized to use a particular WCS feature/function and whether the feature/function, if available, is active.

Figure 11 illustrates a general signaling flow applicable for both feature activation and feature deactivation for the features/functions of the present invention that require activation/deactivation when MS 101 is idle (MS 101 camping on DCCH). Although Fig. 11 does not illustrate an RDT 102, it is understood that an RDT 102 may be included in one embodiment and located between the VAP 103 and the LDS 104. While an MS 101 registered with an NSP 106 is idle, the MS 101 user may dial the feature



activation/deactivation code (e.g., \*66, representing an activation code for an automatic  
callback feature/function) and press, for example, the "send" button on MS 101. In  
response, an IS-136 Origination [Feature Code] 1101 message (where the entered number  
feature activation/deactivation code is entered rather than a called party number) is sent to  
5 VAP 103 via the DCCH (over-R-DCCH). An IS-136 Serial Number message 1102 also is  
sent to VAP 103. After receiving the message, the VAP 103 sends an Origination Request  
[Dialed Digit] 1103 message to NSP 106 and starts the TO1 timer. Alternatively, feature  
activation can be achieved when the MS 101 is active. For example, during an active call  
the MS 101 user may merely enter the feature code and the feature will be activated.

10 After receiving the Origination Request [Dialed Digit] 1103 message, the NSP 106  
analyzes the dialed digits using, for example, controller 1230 (see Fig. 12). If the dialed  
digits includes a feature activation code, the NSP 106 checks the Wireless Centrex System  
Database (WCSD) (for example a user mobile station service profile database stored in  
memory 1240 (see Fig. 12)), using the Mobile Station Identification (MSID) to determine if  
15 MS 101 is authorized for the particular feature requested. If the MS 101 is authorized for  
the feature requested, feature validation is successful and the NSP 106 activates the feature  
for the subscriber and stores any associated feature information into the user profile  
database. The NSP 106 then sends an Origination NACK [Cause, Display] 1104 message  
with the Cause equal to Feature Activation and the Display information indicating  
20 successful feature activation, back to the VAP 103 (e.g., Origination NACK [Feature  
Activation Successful, Call forwarded to FwdDN]).

On the other hand, if the dialed digits are a feature deactivation code, the NSP 106  
checks the WCSD to see if that particular feature is active. If the feature is active, the NSP

106 deactivates the feature and removes any associated feature information from the WCSD.

The NSP 106 then sends an Origination NACK [Cause, Display] 1104 message with the

Cause equals to Feature Deactivation and the Display information indicating a successful

feature deactivation, back to the VAP 103. The NSP 106 generates an Origination NACK

5 message rather than an Origination ACK message because the feature activation request is

provided to the NSP 106 in a message (Origination Request 1103) that is generally intended

for use in originating a telephone call and when a feature activation/deactivation is requested

when the MS 101 is idle, no call will be complete since no DN was entered, thus, the

response by the NSP 106 with a none acknowledgement message, Origination NACK 1104.

10 However, the Origination NACK 1104 message does contain information in its Cause and

Display fields that is needed to inform the MS 101 user that a feature has been activated or  
deactivated correctly.

In either feature/function activation or feature/function deactivation, the VAP 106  
then cancels the TO1 timer and issues an IS-136 Reorder/Intercept [Display] 1105 message

15 with the Display information over the Paging Channel (PCH) to the MS 101. The IS-136

Reorder/Intercept [Display] 1105 message is similar to the Origination NACK 1104

message in that it is generally an indication message that a call origination request has been

unsuccessful and is used in this case as a vehicle for providing the MS 101 user information

regarding the status of their feature activation/deactivation. After receiving the message,

20 MS 101 displays the text message from the Display information field on MS 101 (e.g., Call

forwarded to FwdDN) and resumes the DCCH idle (camping) state. A more detailed

description of the feature/function activation/deactivation processing that goes on in the NSP

106 and VAP 103 using the call forward feature/function as an example follows.

After the NSP 106 receives the Origination Request [Dialed Digit] 1103 message with the Dialed Digit equal to the Call Forward feature Activation/Deactivation code, the NSP 106 first performs an analysis of the dialed digits to determine if it is a valid feature activation/deactivation code. Next, the NSP checks the user service profile in the WCS, using the MSID of the originating MS 101, to determine if the originating MS 101 is authorized for the requested Call Forward feature. The NSP 106 also verifies that the parameters for the feature code are valid. If this validation process is successful, the NSP 106 updates its memory pertaining to feature activation/deactivation for the particular MSID and sends an Origination NACK [Cause, Display] 1104 message to the VAP 103 with the Cause field equal to Call Forward Feature Activation/Deactivation Successful and the Display field information equal to Call forwarded to FwdDN (the forwarding DN dialed with feature code), indicating that feature activation/deactivation is successful.

The NSP 106 will take the following actions in response to the MS 101 user entering various codes and different phone numbers to forward a call. As a first alternative, when the feature/function Call Forwarding – Unconditional is entered on MS 101 by the WCS subscriber the NSP 106 checks to see if there is a Call Forwarding feature/function already active for the particular mobile station MS 101. If a Call Forwarding feature/function is already active then the NSP 106 will update the previous feature/function active code entry and update, for example, the information with a new call forwarding number. Otherwise the NSP 106 will simply create a new feature/function active code entry and the call forwarding number for the mobile station MS 101.

As a second alternative, if the mobile station MS 101 user enters the feature/function code for the Call Forwarding - Programmable Ring feature and the number of rings is

specified, the NSP 106 will verify that the number is within a range of acceptable values (i.e., valid). If the number of rings is not a valid number, the NSP 106 will use a default value for the number of rings to use. Next, the NSP 106 will translate the number of rings into an associated number of seconds it will take to execute the desired number of rings and  
5 create or modify as necessary the feature entry for the mobile station MS 101 to provide the desired number of seconds for ringing. Thus, this entry will contain the MSID, call forwarding number and the number of seconds ringing is to continue.

As a third alternative, if the mobile station MS 101 user enters the feature/function code for the Call Forwarding - Time of Day feature/function, the NSP 106 will verify that  
10 the begin time and end time parameters are present and valid. If the time parameters are valid, the NSP 106 will create/modify the feature entry for the mobile station MS 101. The entry will contain MSID, call forwarding number, begin time and end time.

As a fourth alternative, if the mobile station MS 101 user enters the feature/function code for the Call Forwarding – Busy feature/function, the NSP 106 will modify or create the  
15 feature entry for the mobile station and store the call forwarding number to be used if an incoming call occurs when the mobile station MS 101 user is, for example, on another call. The entry will contain the MSID, the call forwarding number, and a flag indicating that the call is to be forwarded when the MS 101 line is busy.

Furthermore, the MS 101 user may activate a feature, such as call forward, for a  
20 particular DN without entering the DN. First, as previously noted, the MS 101 could enter the feature code while on an active call and the feature would be provisioned relative to the DN of the other party involved in the call. Second, feature activation provisioning may be

achieved without entering a DN by entering the feature activation code immediately after a call has been disconnected.

However, if the mobile station MS 101 user enters the feature/function code for Call Forwarding Feature Deactivation, the NSP 106 will verify that the feature corresponding to the deactivation code is currently active for the mobile station MS 101. The NSP 106 will then deactivate the feature/function and delete the associated feature information from the subscriber profile.

In any case, the NSP 106 will subsequently send out the Origination NACK [Cause, Display] 1104 message to the VAP 103. The Cause field will contain information such as; Feature Activation Successful, Feature Activation Failed, Invalid MS, Out of Resource, Input Unknown, Feature Deactivation Successful, Feature Deactivation Failed. The Display field will contain information such as Call forwarded to FwdDN.

Some examples of possible feature activation and deactivation codes are provided in the tables below for various WCS feature/functions. The activation and deactivation codes for the WCS features/functions, which need to be activated/deactivated when the MS is idle (MS 101 on DCCH), are tabulated below.

Feature Application	Activation Code	Deactivation Code
Automatic Callback	*66	*660 or MS power down/de-registered
Call Forwarding-Unconditional	*90#DN	*900
Call Forwarding-Programmable Ring	*91*x#DN, *91#DN	*910
Call Forwarding-Time of Day	*92*hhmm*hhmm#DN	*920
Call Forwarding-Busy	*93#DN	*930
Call Return	*69	*690
Call Screen	*60#DN or *60#n#DN	*600#DN
Distinctive Ringing	*70#DN or *70#n#DN	*700#DN

Speed Calling	*75*(1-30)#DN	
---------------	---------------	--

Table 1

In the Table 1 above, the DN denotes a directory number (telephone number), the x denotes  
 5 the number of rings and the hh denotes the hour of day in the format of 00 to 23, mm  
 denotes the minute in the format of 00 to 59.

The feature codes of WCS features/functions, which can be initiated when the call is  
 in progress (MS 101 on DTC), are tabulated below in Table 2.

Feature Application	Feature Code
Call Transfer	*77#TransferDN
Three-way call	*33#ThreeWayDN

Table 2

One skilled in the art will recognize that the feature/function activation and deactivation  
 codes provided above are purely exemplary and may be different without changing the basic  
 15 concept of the present invention.

Furthermore, as examples of feature/function activation/deactivation, the NSP 106  
 will take the following actions for various different feature/function codes input by the MS  
 101. (1) Call Forwarding - Unconditional: If there is a Call Forwarding feature already  
 active for the particular mobile, the NSP 106 will update the feature entry with the new call  
 20 forwarding telephone number. Otherwise, the NSP 106 will create a new feature entry for  
 the mobile. (2) Call Forwarding - Programmable Ring: If the number of rings is specified,

the NSP 106 will verify that the number is within the range, or it will use the default value.

The NSP 106 will translate the number of rings into number of seconds and create/modify the feature entry for the MS 101. The entry will contain the MSID, call forwarding number and the number of seconds. (3) Call Forwarding - Time of Day: The NSP 106 will verify

5 that the begin time and end time parameters are present and valid. If the time parameters are valid, the NSP 106 will create/modify the feature entry for the MS 101. The entry will contain MSID, call forwarding number, begin time and end time. (4) Call Forwarding -

Busy: The NSP 106 will modify/create the feature entry for the MS 101 and store the call forwarding number. (5) Speed Dialing: NSP 106 will verify the data that is sent by the MS

10 101 for provisioning. The unique code specified may be, for example, a valid number in the range 1 - 30, and the DN may be, for example, a number consisting of 1 to 17 digits (a single digit number can be the smallest number that a WCS subscriber can dial to make a

successful call, e.g., dial 0 to reach the operator. Seventeen digits may be required to accommodate a call screen for international calls. To make an international call – dial 9 to

15 get out, then 3 number code to make an international call, 2/3 number code for the country, 2/3 number code for the region/area and 7 digit phone number, makes a possible total of 17

digits). The NSP 106 then updates the speed-dialing code list for the MS 101 with the new data provided. In case an entry for the requested unique code already exists, then the current

DN will overwrite the existing entry. (6) Call Screen: NSP 106 will verify the data that is

20 sent by the MS 101 for provisioning. The CallScreenDN specified must be a valid number, e.g., it may consist of 4 to 10 digits, and the code signifying the type of treatment may be,

for example, from 1 to 3. The NSP 106 then updates the CallScreenDN list for that MS 101

with the new data provided. (7) Distinctive Ringing: If the user sends \*70#n#DN, where n

is a number from 1 to 5 and DN is a phone number and presses the send button, NSP 106 will verify the data that is sent by the MS 101 for provisioning. The DistinctiveRingingDN specified may be, for example, a valid number consisting of 4 to 15 digits, and the code signifying the type of ring signal may be, for example, between 1 and 5. The NSP 106 then  
5 updates the DistinctiveRingingDN list for that MS 101 with the new data provided. (8)

Feature Deactivations: The NSP 106 will verify that the feature corresponding to the deactivation code is currently active for the MS 101. It will then delete the associated feature information from the subscriber profile.

In any case, if the validation is unsuccessful because the feature code is invalid or the  
10 parameters are missing, a Cause value equal to the Feature Activation/Deactivation Failed and the appropriate Display information regarding the specifics of the failure will be included in the Origination NACK [Cause, Display] 1104 message.

When VAP 103 receives the Origination NACK [Cause, Display] 1104 message, the VAP 103 cancels the timer TO1, extracts the Display information from the message, and  
15 inserts the Display information into the Display field of IS-136 Reorder/Intercept [Display] 1105 message. Next, the VAP 103 send the IS-136 Reorder/Intercept [Display] 1105 message to MS 101 and instructs the MS 101 to return to the idle (camping) state. Similar feature/function activation/deactivation signal flows will be used in the various feature/functions for the WCS as described in more detail below.

20 Although the feature/function activation/deactivation signal flows have been explained using call origination signaling, the signaling and MS 101 user notification may also be achieved using Short Message Services (SMS) signaling with text messages or audio messages over a voice channel. The audio notification can be accomplished by establishing



a voice channel between the VAP 103 and the MS 101 and playing a recorded or voice synthesized message, e.g., Call forwarded to FwdDN to the MS 101.

**X. Call Hold [KAW-Completed 11/19/99]**

Often, a telephone user, particularly a mobile phone user, is preoccupied when an incoming call is received or is interrupted with something of a higher priority during an active call. For example, a mobile telephone user may be in a meeting where the receipt of an incoming call would be a disruption. Thus, there is a need to allow a user to avoid disruption at particular times. However, the mobile telephone user may wish for the call to be temporarily on hold because they will be available in a short period of time.

In existing wireless telephone handsets, a user can preset her wireless phone so that an action is automatically taken when a call is received. For example, a user can preset a wireless telephone so that an incoming call is forwarded to voice mail. While such systems allow a user to avoid disruption, they do not allow a user that may be available in the immediate future, e.g., in a few seconds, to subsequently connect with the call that has been directed to voicemail, i.e., to delay receipt of the call until the user is available. In the alternative, existing wireless telephone systems allow a user to place a call on hold during an active call, for example, after answering an incoming call. However, answering the call immediately only to place the call on hold is also disruptive.

The call hold feature of the present invention enables existing wireless handsets to provide a user with the ability to interactively place an incoming call on hold in real time without first answering the call. A user, who does not wish to be interrupted or needs to carry on a private conversation off-line can either postpone answering an incoming call

without first becoming involved in an active phone call conversation or by placing a presently active call on hold. According to one such embodiment, the calling party can be coupled to, for example, a voice processing unit (VPU) to receive a message that indicates the call is on hold and the called party (WCS subscriber) will be with them shortly. The

5 WCS call hold feature allows the MS 101 user to reroute an incoming call to the VPU without answering the incoming call even though the incoming call is in the process of being automatically routed to the voice mail system (VMS). Thus, the WCS of the present invention provides a user with the ability to instantaneously place an incoming call on hold in real time or interrupt an incoming call routed to a VMS without first answering the call,  
10 have the caller automatically instructed that the call is on hold, and to pickup the call sometime in the near future. Therefore, the present invention allows a mobile phone subscriber to place an incoming call on hold without first having to answer the call as well as allowing a mobile phone user to place an active call on hold. A detail discussion of the WCS call hold feature/function follows.

15 Figure 12 shows an illustrative communications system in which the call hold feature of the present invention can be implemented. A public switched telephone network (PSTN) 125 is connected to a plurality of communication networks, including one having a telephone 1215. The PSTN 125 can be coupled to a plurality of local digital switches, such as (LDS) 104. As previously noted, the LDS 104 may be a TR-08 and/or GR-303  
20 compatible switch which employs distributed intelligence, process-oriented software, and coordinated autonomous computing elements to provide a flexible, modular, reliable and robust digital switching system. Exemplary, but not limiting, LDSs include the 5ESS manufactured by Lucent Technologies and the DMS-100/500 manufactured by Nortel. The

LDS 104 can provide a single platform for advanced services including ISDN, Centrex, Custom Calling, and Advanced Intelligent Network (AIN) capabilities. The LDS 104 provides the switching fabric, administration, message switching and call switching functions.

5           The LDS 104 may be coupled to network server platform (NSP) 106 by an X.25 link 4 (packet switched data network link) and an SS7 link 5 (signaling system for call setup and database transactions). The X.25 link 4 carries call control messages on the D-channel between the NSP 106 and LDS 104 that are destined for VAPs 103A and 103B. The SS7 link 5 between the NSP 106 and LDS 104 carries the AIN (Advanced Intelligent Network) messages that directs the LDS 104 for proper routing of a call to a user who is a WCS subscriber.

10           NSP 106 may include, among other elements, a controller 1230, a voice processing unit (VPU) 1235, memory 1240, and communications bus (CB) 1238. The NSP 106 provides voice access ports (VAPs) 103A, 103B of the wireless centrex system with control and related operations, administration, maintenance, and provisioning (OAM&P) functions. Control functions include, but are not restricted to, mobile station and mobility management, call control, and feature applications. The NSP 106 is responsible for, among other functions, network intelligence for the VAP 103, validation, registration, and mobility management.

20           The LDS 104 may, for example, be connected to a RDT 102 by a Bellcore standard GR-303 interface 1. The GR-303 standard defines digital transmission facility interfaces such as DS1 and SONET, concentration options between the LDS 104/IDT 105 and the RDT 102, signaling options, and call processing and operations data links. The GR-303

interface 1 can be transported across metallic (e.g., T1, ISDN: PR2 or DS3) or fiber-optic (e.g., SONET OC3 or OC12) links. The GR-303 interface 1 carries the voice traffic and the signal traffic for the LDS 104 and the NSP 106.

The PSTN 125 may also be coupled to a mobile switching center (MSC) 1250. The MSC 1250 generally has functionality similar to the combination of LDS 104 and NSP 106, and operates to control a cellular telephone network. Mobile switching center architectures are known in the art, and it will be appreciated that any known MSC may be adapted for use with the present invention. Plural base stations are controlled by the MSC 1250, such as base station (BS) 1255. Mobile Stations (MS) can travel throughout the cellular network and within the WCS network. Depending on a number of factors, calls involving a mobile station are handled by a base station that provides coverage for the area in which the mobile station is located. Handoff of calls involving the mobile station from one base station to another is controlled by the MSC 1250 in a known manner. A mobile station (MS) 101 is wirelessly coupled to BS 1250 as shown.

On the other hand, when MS 1260 enters the picocell area of a VAP in the WCS system, handsoff does not occur unless MS 101 has previous authorization to operate within the WCS system. In fact, if the WCS is constructed with security features/functions for restrictive access, the VAP 103 will deny registration and disconnect MS 101 from all macro and micro cell base stations.

A more detailed representation of the elements of an illustrative WCS are depicted in Figs. 1A-1C, and include, among other elements, the VAPn 103A and 103B and two mobile communications units, e.g., IS-136 digital TDMA cellular/PCS phones, MS 101A and 101B.

Also shown are plain old telephone service (POTS) 108 and integrated services digital network (ISDN) 109.

Illustrative implementations of the functions for the call hold/unhold feature of the present invention will now be described in connection with a wireless centrex system.

5 However, it should be understood that the call hold/unhold feature service could also be supported in existing macro cellular systems including an MSC and BS, if properly designed. In such a system, the MSC 1250 and BS 1255 would be programmed to be the functional equivalent of the WCS system including NSP 106 LDS 104, RDT 102 and VAP 103 combined. However, it is noteworthy that the macro cellular system can not support  
10 ISDN and POTS wireline telephones but the WCS system can because it is integrated into such existing systems.

Figure 13 shows the call flow for setting up an incoming call (i.e., call termination) similar to the call flow for setting up an incoming call illustrated in Fig. 5. For purposes of this discussion, it will be assumed that a calling party (e.g., telephone 1215) coupled to the  
15 PSTN 125 (or connected to the same LDS) dials the phone number (DN) of the mobile unit 101 and MS 101 is geographically within the WCS transmission picocell area.

The call with the DN arrives at the LDS 104 from the PSTN 125. The LDS 104 receives the ISUP (integrated services digital network user part) IAM (initial address message) 508 message from the PSTN 125 (or a Q.931 setup message). The LDS 104  
20 determines whether the DN is provisioned for AIN termination attempt trigger (TAT), i.e., whether the DN is associated with a WCS authorized MS. If so, the LDS 104 suspends delivery of the call and sends an AIN query message TCAP (AIN Termination \_Attempt [DN]) 509 to the NSP 106. The NSP 106 determines whether the subscriber's mobile unit

MS 101 is active and idle in its serving area. If so, the NSP 106 pages the mobile unit MS 101 by sending a Page Request [FDN, MSID] 510 message through the VAP 103 using IS-136 established paging procedures, and starts the TT6-paging response timer. As part of the Page Request 510 message, the NSP 106 sends the VAP's ISDN forward directory number (FDN) and mobile station identification number (MSID) that the VAP 103 uses to complete the incoming call setup procedure.

The mobile unit MS 101 responds to the page by sending an IS-136 Page Response 529 message to the VAP 103. The VAP 103 forwards the Page Response message using Page Response 511, to the NSP 106 and starts event timer TT5 to prevent permanent holding of RF and ISDN B-channel resources. When the NSP 106 receives the Page Response 511 message, it cancels the TT6 timer and knows that MS 101 is available to receive the incoming call and that the VAP 103 has the resources to support the incoming call. At the direction of the NSP 106, the LDS 104 forwards the call to the FDN of the VAP 103 (e.g., in a TCAP conversation package) serving the mobile unit MS 101. The NSP 106 also indicates its interest in the event (O\_No\_Answer for FDN) by sending next event list (NEL) information to LDS 104 in a request component that accompanies the routing component in a conversation package (i.e., TCAP (AIN Forward Call [FDN], NEL [O No Answer]) 512 message).

The LDS 104 starts a no answer timer (T(NoAnswer)531)) for the FDN and sends an ISDN Q.931 Setup [FDN] 513 message to the VAP 103. Upon receipt of the ISDN Q.931 Setup [FDN] 513 message, the VAP 103 cancels the TT5 timer, invokes B-channel call processing, initiates an IS-136 digital traffic channel (DTC) designation to the mobile

unit MS 101, starts the TT2 timer, and sends a ISDN Q.931 Call Proceeding 514 message to the LDS 104.

The mobile unit MS 101 tunes to the designated DTC and sends an indication message, MS on DTC 515, to the VAP 103. When the VAP 103 detects that the mobile unit MS 101 is on the requested traffic channel through a Digital Verification Color Code (DVCC; a layer 2 signal from the MS) status change, it cuts through the ISDN/B-channel and initiates the alerting procedures for each call leg, that is upstream to the LDS 104 and downstream to the mobile unit MS 101. In particular, the VAP 103 sends an IS-136 Alert-with-info 516 message to the mobile unit MS 101, starts the Alert timer (TT3), and sends an ISDN Q.931 Alerting 518 message to the LDS 104. When the mobile unit MS 101 receives the Alert-with-info 516 message, it notifies the user through, for example, ringing (or an audible noise, vibrating, indicator lights, or a visual message display) that there is an incoming call (i.e., someone is calling them). When the LDS 104 receives the ISDN Q.931 Alerting 518 message, it sends an ISUP ACM (address complete message) 519 message to indicate that the Mobile Station MS 101 is available and communicating with the VAP and switches in the PSTN 125, and generates a ringback tone 520 that is heard by the calling party.

The mobile unit MS 101 returns an alerting acknowledge, IS-136 Mobil ACK 517, message to the VAP 103 so that the VAP 103 knows that MS 101 is alerting the user that there is an incoming call. Responsive to the alerting acknowledge message, the VAP 103 cancels the TT3 timer, starts a TT4 timer, and enters the wait-for-answer call processing state. If the MS 101 user answers (accepts) the call by, for example, pushing a send (or talk) key on the mobile station, the mobile station MS 101 sends an IS-136 Connect 521 message

on the FACCH to the VAP 103. In response, the VAP 103 cancels the TT4 timer and sends an ISDN Q.931 Connect 522 message to LDS 104. After receiving the Connect message, the LDS 104 cancels the T(NoAnswer) 531 timer, and sends ISUP ANM (answer message) 523 message to the switch in the PSTN 125 and cuts through the voice path. Next, the LDS 5 104 sends an ISDN Q.931 Connect ACK 524 acknowledge message to the VAP 103 and then sends a TCAP Completed 525 message to the NSP 106 (using TCAP response) to complete the TCAP transaction. After receiving the ISDN Q.931 connect ACK 524 acknowledge message, the VAP 103 sends a Termination Result [Success] 526 message (i.e., call connected) to the NSP 106 to indicate that the incoming call has been successfully 10 connected to the mobile station MS 101 and to trigger billing (air interface usage) and other OAM&P activities. A voice path 527 is then established between the calling party and the mobile unit MS 101. Once the call has been connected and a voice path established the mobile station MS 101 user can place the active call on hold as described below.

If the MS 101 user does not answer the incoming call the T(NoAnswer) timer will 15 expire and the incoming call will be handled according to the mobile station MS 101 user's preprogrammed default designation. For example, the call could be forwarded to the VMS 107, the call could be forwarded to the MS 101 associated desk top phone 108, or the incoming call may be allowed to continue alerting the mobile station (MS) indefinitely until the caller hangs up the telephone.

20 Figure 14A shows the call flow for a first preferred embodiment illustrating implementation of the call hold/unhold feature performed on an active call. For purposes of this discussion, it will be assumed that there exists an active call between a mobile station MS 101 in a WCS and a calling party (e.g., using POTS telephone 1215) coupled to the



PSTN 125 and the call has been established either by a caller using POTS 1215 initiating a call to MS 101 (i.e., as just described with reference to Fig. 13), or vice versa. In any case, an Active Call 1401 is in progress and the mobile station MA 101 user decides to place the active call on hold.

5           When the mobile user generates a hold command by, for example, pressing a hold button on their MS 101, an IS-136 call-hold request message 1402 is sent over the FACCH (fast associated control channel) from the MS 101 to the VAP 103 (with which the MS 101 is registered). The VAP 103 interprets the request message, stops processing voice traffic frames, and notifies the NSP 106 that there is a call on hold 1404. Also, in response to the  
10   request message, the VAP 103 sends an IS-136 Call-Hold Request Ack 1403 acknowledge message to the MS 101. The VAP 103 continues to monitor the FACCH and also informs the NSP 106 that the call is on hold (Call on hold 1404). In response the NSP 106 will send a Call on hold Ack 1405 message. If a personalized message has been pre-recorded by the MS 101 user, the Call on hold Ack 1405 message will contain the personalized message,  
15   i.e., the Call on hold Ack (personalized message) 1405 message will be provided from the NSP 106 to the VAP 103.

          When the VAP 103 places the call on hold, it may direct, for example, its own DSP (digital signal processor) to send a message and/or white noise (comfort noise such as music) 1406 to the calling party and/or the MS 101. The message and or white noise can be  
20   used to let the parties know that the call is still active and on hold. During the period that white noise is sent to the MS 101, the MS 101 can continue to transmit traffic frames, but the VAP 103 will ignore the frames. Further, the VAP 103 may also ignore voice traffic transmitted from the calling party.

When the MS 101 user generates an unhold command by, for example, pressing the hold button again, the MS 101 transmits an IS-136 Call-Unhold Request 1407 message on the FACCH to VAP 103. Upon receipt of the request message, the VAP 103 performs several actions. The VAP 103 informs the NSP 106 that an active call has been resumed 1409 and also instructs its DSP to stop generating white noise, if provided. The VAP 103 again begins to process traffic frames (e.g., voice traffic) received from the MS 101 and sends the frames to the calling party and again process voice traffic 1408 from the calling party directed to the MS 101. The VAP 103 also transmits a IS-136 Call-Unhold Request Ack 1408 acknowledge message to the MS 101 to indicate that the call is resumed.

Figure 14B shows the call flow for a second preferred embodiment illustrating implementation of the call hold/unhold feature performed on an active call. For simplicity, this signaling flow only discusses how the system reacts to the feature when there is only one call for the MS 101. For interactions with other features, e.g. Three-way Call, refer to that section for more information.

First, the call is in progress, Call in progress 1420, and the MS user presses, for example, the send button on MS 101. An IS-136 Flash With Info 1421 message is sent to the VAP 103. The VAP 103 sends an IS-136 Flash With Info ACK 1423 message to the MS 101 and sends a Feature Request [FlashWithInfo] 1422 message to the NSP 106 which indicates that the MS 101 user is initiating a call hold. When the NSP 106 receives the Feature Request [FlashWithInfo] 1422 message from the VAP 103, it analyses the message and confirms that the mobile is not involved in a 3-way call. If the current call reference indicates that this is a three-way call, the Flash-With-Info message received by the NSP will be examined with different set of rules similar to those described in the section herein

related to conference calling. The NSP 106 then interprets the message as a request for Call Hold and validates that the MS 101 is authorized to the Call Hold feature. If the validation is successful, the NSP 106 sends a Feature request ACK [Call Hold] 1424 message to the VAP 103, the action field being designated as Call Hold. If the MS 101 is not authorized to use Call Hold feature, the NSP 106 ignores the Feature Request [FlashWithInfo] 1422 message. Further, the NSP 106 may, but not need, send a Feature Request NACK message to the VAP 103 because the VAP 103 has no action to take upon such a message. It may play a voice prompt or send a short message to the user in such a case for future releases of the feature.

Next, the VAP 103 sends Q.932 Hold 1425 message to the LDS 104 and starts a THh timer. In response, the LDS 104 sends a Q.932 Hold ACK 1426 message to the VAP 103 and the VAP 103 stops the THh timer. The call is placed on hold with the LDS 104, Call held 1427. However, if the VAP 103 receives a Q.932 Hold NACK message from the LDS 104 it will send out a Call Held [Fail] message to the NSP 106. Further, if the timer THh expires, the VAP 103 will log an error and send out a Call Held [Fail] message to the NSP 106.

Next, the VAP 103 sends a Call Held [success] 1428 message to the NSP 106, and if provisioned, plays a voice prompt to inform the user that the call is on hold and/or music (VAP plays voice and/or music 1429), and starts TH1 timer. However, if the NSP 106 gets a Call Held [fail] message from the VAP 103, it will modify the call information record (if needed) and the call will remain in a 'talk' state.

When the MS 101 user wants to retrieve the call it presses, for example, the send key or the hold key again on the MS 101 and IS-136 Flash with Info 1430 message is sent to the

VAP 103. When the VAP 103 receives the IS-136 Flash with Info 1430 message, the VAP will look at the appropriate record to find that this message has come for a call which is currently on hold. The VAP 103 stops the TH1 timer and sends back an IS-136 Flash With Info Ack 1431 message to the MS 101. Since the VAP 103 has determined that this is a request to retrieve the held call, it sends a Q.932 Retrieve 1432 message to the LDS 104 and starts the TRr timer. However, if the TH1 timer expires, the VAP 103 shall play a voice prompt (optional) to the user informing him that the call is being disconnected. It shall then follow, for example, the VAP 103 OA&M Release procedure and release the call.

When the VAP 103 receives a Q.932 Retrieve ACK 1433 message from the LDS 104, it cancels the TRr timer and sends a proprietary Call Retrieve [success] 1434 message to the NSP 106. However, if the VAP 103 receives a Q.932 Retrieve NACK message from the LDS 104, it will send out a Call Retrieved [Fail] message to the NSP 106. Further, if the timer TRr expires, the VAP 103 will log an error, send out a Call Retrieved [Fail] message to the NSP 106 and initiate, for example, a VAP 103 OA&M Release procedure.

Then, the NSP 106 modifies the call record information to indicate that a call is in progress with MS 101. If the NSP 106 receives a Call Retrieved [fail] message from the VAP 103, it shall stop the TH2 timer and update its call information record. Further, if the timer TH2 expires, the NSP 106 will initiate, for example, an OA&M Release procedure. Finally, the call is retrieved and resumes as Call in progress 1435.

As indicated above, another embodiment of the call hold feature/function may include the use of a personalized message to be used prior to, or in place of, a system default voice prompt and comfort noise (e.g., music) when a call is placed on hold. The MS 101 user may use the VPU 1235 to record personalized messages for the call hold

feature/function. If the MS 101 user enters a special feature access code, for example \*70, to initiate recording a personalized message recording in the VPU 1235. The NSP 106 validates the MS 101 and assigns call resources to the MS 101. Then the VPU 1235 prompts the user to record their personalized greeting. Once the greeting is completed, the NSP 106 stores it in, for example memory 1240, for the MS 101 user in their subscriber profile. Next, the NSP 106 frees the call resources. If the user wishes to modify or delete their personalized greeting they may enter another feature code, for example \*71.

When the user is on an active call and invokes the call hold feature/function, a message is sent by the VAP 103 to the NSP 106 indicating invocation of the feature. In response, the NSP 106 checks against the subscriber DB stored in, for example memory 1240, to determine if there is a personalized greeting available for the MS 101 user that may be used for a call hold. If there is a personalized greeting for the MS 101 user, the NSP 106 sends it to the VAP 103 and may be included as part of a call hold acknowledgement message. When the VAP 103 receives the call hold acknowledgement message, if there is a personalized greeting for MS 101, it will play that to the calling party of PSTN 125/1215. If there is no personalized greeting for the MS 101 user, the NSP 106 may send a call hold acknowledgement message without any personalized message and the VAP 103 will play some other default message, for example, a system default generic message indicating that the call has been placed on hold. In either case, the VAP 103 may subsequently play comfort noise, e.g. music to the calling party placed on hold. Alternatively, the VAP 103 may play the comfort noise to both parties without any prior message. Although this personalized greeting feature is described with respect to call hold, it may also be used in conjunction with call screen and distinctive ringing feature/functions as well.

Figure 15 shows the call flow for an illustrative implementation of the call hold/unhold feature for an unanswered incoming call. As with figure 13, it will be assumed that a calling party (e.g., telephone 1215) coupled to the PSTN 125 (or at the same LDS) dials the phone number (DN) of the mobile unit MS 101 and MS 101 is within the transmission service picocell area of the WCS.

When the mobile unit MS 101 receives an incoming call, the mobile unit MS 101 can alert the user of the incoming call by, for example, ringing or other audible noise or alerting methods. Also, caller ID information can be provided that shows up on a display of the mobile unit MS 101. Figs. 5 and 13, as discussed above, shows the call flow for delivery of and answering of an incoming call. However, rather than answer the incoming call the mobile station MS 101 user can decide to place the incoming call on hold before answering it (i.e., before pressing, for example, a send key (e.g., talk, on, yes, answer, etc.) on MS 101 and initiating a personal conversation with the caller). Rather than answer the call immediately, the mobile station MS 101 user can accept the call without answering it by first putting the incoming call on hold as described below.

Upon being alerted of the incoming call, a user 1520, not wishing to answer the call immediately, can generate a hold command by, for example, pressing a hold button on the mobile unit MS 101 or entering a feature code (e.g., \*95). When the user inputs a hold command, the call is accepted (i.e., connected) and put on hold rather than being answered and a voice path being cut to the mobile station MS 101. However, when the call is accepted, resources including a traffic (e.g., voice) channel are allocated for the call and white noise or an announcement will be provided. Also, the call is connected in the same manner as described above and shown in Figs. 5 and 14 illustrated as step 1506.

The VAP 103 receives a call hold request via an IS-136 Call-Hold Request 1505 message from the mobile unit MS 101 and sends, for example a personalized message or a default message, e.g., a generic system call on hold announcement to the calling party (Call on hold announcement to originating party on DTC 1508). The VAP 103 also sends an IS-  
5 136 Call Hold Request ACK 1507 acknowledge message to the mobile unit MS 101 and notifies the NSP 106 that the mobile unit MS 101 has put the call on hold (call on hold 1510). Thus, the call is placed on hold with the VAP 103 and the VAP notifies the NSP 106 using the Call on hold 1509 message.

A DSP in, for example, the VAP 103 may send a message or comfort noise (i.e.,  
10 white noise such as music) to the user of the mobile unit MS 101 and to the calling party while the incoming call is on hold. In the alternative, the VPU 1235 may play a short message (announcement) sent to the VAP 103 via a call on hold Ack message indicating the call is on hold prior to the DSP sending a system default message or comfort noise. While the call is on hold, the mobile unit MS 101 can continue to transmit traffic frames, but the  
15 VAP 103 will ignore the frames. Further, the VAP 103 may ignore voice traffic transmitted from the calling party (e.g., mute).

When the user of the mobile unit MS 101 desires to retrieve the held call, the user can generate an unhold command by, for example, pressing the hold button (or feature code) again 1511 on the mobile unit MS 101. In response, to a call unhold command, the mobile  
20 unit MS 101 sends an IS-136 Call-Unhold Request 1512 message on the FACCH to the VAP 103. The VAP 103 interprets this message and directs the DSP to stop sending white noise, if provided. In response to message, the VAP 103 begins to process traffic frames received from the mobile unit MS 101 and sends the same to the calling party. The VAP

103 sends a notification to the NSP 106 that the call is no longer on hold and has become active (call resumed 1514). Also, the VAP 103 begins processing the voice traffic from the calling party transmitted to the mobile unit MS 101, thus establishing an Active Voice Call 1515.

5 According to another illustrative embodiment of the present invention, the call hold button can act similar to a call mute button when a call is placed on hold, by for example pressing the hold button twice quickly. In this implementation, the mobile unit MS 101 can receive voice traffic from the calling party, while the calling party is muted from any voice traffic generated by the called party. In this instance, the calling party may receive white  
10 comfort noise when on hold. This call muting type functionality creates one way voice traffic transmission. Such an implementation may be beneficial in allowing the calling party to communicate a brief message to the called party at any time after the call has been placed on hold. Thus, if a calling party has an emergency message or an important message that cannot wait, the called party may receive this message in real time.

15 In one embodiment a call hold announcement may be played to the called party or an alert is provided to the called party to remind them that the a call is on hold. During the announcement to the called party the one-way communication line can be temporarily shut off or optionally open for voice traffic. As previously noted, a call hold announcement may also be sent to the calling party. The call hold announcement may be repeated to the calling  
20 party and/or the called party at predefined intervals (e.g., every 30 seconds) subsequent to initiation of the call hold.

Furthermore, in another embodiment, the call hold feature may allow a calling party to interactively transfer to a voice mail system or send an alphanumeric message to the



called party rather than simply wait on hold. For example, when a call is on hold the VPU 1235 can notify the calling party the they may leave a message in the called party voice mail by entering a particular set of key strokes (e.g., \*34#) or enter any alphanumeric message using their telephone key pad. The NSP 106 will respond to the input by the calling party and instruct the LDS 104 to route the input accordingly to either the VMS 107 or the MS 101. A more detailed discussion of the announcement features and additional features related to user proactive call handling follows.

#### **XI. User Proactive Call Handling**

Another feature of the present invention provides user proactive call handling (UPCH) functionality. This feature allows a mobile telephone user to proactively handle a call in an intelligent wireless communications system. One aspect of this feature allows a user to process and terminate an incoming call in real time. Another aspect of the UPCH feature provides the ability to delay allocation of the voice channel to a called party until when, if at all, the incoming call to the called requires a voice channel.

According to an illustrative embodiment of the present invention, a subscriber is notified of an incoming call via a Short Message Service (SMS) message with caller ID or a user alert, such as a tone or ringing. Upon receipt of the alert, the subscriber may select from a series of options, how to process and terminate the incoming call. For example, if an incoming call is of high priority and requires immediate attention, the subscriber may decide to answer the call immediately. If the subscriber decides that the call does not require immediate attention, he may opt to provide a delayed answer. Such a delayed answer option can involve connecting the call to an announcement prior to answering the call. Still further,

if neither of the prior options is suitable, then the subscriber may opt to send the call to a voice mail system, from which a recorded message can later be retrieved. Yet another option of terminating the call is to forward the call to another phone. In the event that the subscriber decides that the incoming call should not be answered, the subscriber may choose to reject the call. If the subscriber decides that none of the aforementioned options should be proactively taken, then a default option can be used to terminate the call. Such a default option may include, but is not limited to, forwarding the call, delaying the answer, sending the call to a voice mailbox, or rejecting the call. A detailed discussion of the systems and methods for implementing UPCH features/functions in a WCS follows.

The UPCH feature, like the call hold feature of the present invention, can be implemented using the illustrative communications system of Fig. 12. A public switched telephone network (PSTN) 125 is connected to plural communication networks, including one having a telephone 1215. The PSTN 125 can be coupled to a plurality of local digital switches, such as local digital switch (LDS) 104. The LDS 104 may be coupled to network server platform (NSP) 106 by an X.25 link 4 and an SS7 link 5. NSP 106 may include, among other elements, a controller 1230, a voice processing unit (VPU) 1235, memory 1240, and communications bus (CB) 1238. The NSP 106 provides voice access ports (VAPs) 103A, 103B of a wireless centrex system with control and related operations, administration, maintenance, and provisioning (OAM&P) functions. Control functions include, but are not restricted to, mobile station and mobility management, call control, and feature applications. The NSP 106 is responsible for, among other functions, network intelligence, validation, registration, mobility management, and serves as a message center.

The X.25 link 4 carries call control messages on the data channel (D-channel) between the NSP 106 and LDS 104 that are destined for the VAPs 103A and 103B. The SS7 link 5 between the NSP 106 and LDS 104 carries the AIN (Advanced Intelligent Network) messages that direct the LDS 104 for proper routing of call to a user who subscribes to wireless centrex system (WCS) services.

The LDS 104 may be connected to a remote digital terminal (RDT) 102 by a Bellcore standard GR-303 interface 1. The GR-303 standard defines digital transmission facility interface such as DS1 and/or SONET, concentration options between the integrated digital terminal (switch) 105 and the RDT 102 signaling options, and call processing and operations data links. Thus, the GR-303 interface 1 can be transported across metallic (e.g., T1, ISDN:PR1 or DS3) or fiber-optic (e.g., SONET OC3 or OC12) links. The GR-303 interface carries the voice traffic and the signal traffic for the LDS 104 and the NSP 106.

The PSTN 125 is also coupled to a mobile switching center (MSC) 1250. The MSC 1250 has functionality similar to the combination of LDS 104 and NSP 106, and operates to control a cellular telephone network. MSC architectures are known in the art, and it will be appreciated that any MSC may be adapted for use with the present invention. Plural base stations (BS), for example like the one BS 1255, are controlled by the MSC 1250. Mobile stations MS 101 can travel throughout the cellular network and into the WCS network.

Depending on a number of factors, calls involving a mobile station are handled by a base station BS 1255 that provides cellular coverage for the area in which the mobile station is located. Handoff of calls involving the mobile station MS 101 from one base station BS 1255 to another base station BS 1255 is controlled by the MSC 1250 in a known manner. A mobile station MS 101 may be wirelessly coupled to BS 1255 as shown or alternatively to a

VAP 103 for communication connection to other telephones within the entire PSTN, cellular telephone, and WCS configuration. Thus, the WCS can connect to a macro cellular SS7 network to support integrated mobility functions including terminal handoff and personal roaming features.

5 On the other hand, as illustrated in Fig. 1, a WCS can operate as a wireless system without being connected to a public macro cellular system, and thus not support mobility functions associated with the macro cellular system.

An illustrative implementation of the UPOCH service of the present invention will be described in connection with a wireless centrex system. However, it should be understood  
10 to those skilled in the art that the UPOCH service can also be supported in existing macro cellular systems. In such a system, the MSC 1250 can provide similar functionality to the NSP 106 plus the LDS 104, and a BS 1255 is functionally similar to a VAP 103.

Figure 16 provides an exemplary call flow diagram for activating the UPOCH feature according to an illustrative embodiment of the present invention. To activate the UPOCH  
15 service, a subscriber enters an Feature Activation Code (FAC) 1601 (e.g., \*1) on his mobile station MS 101 and presses, for example, a SEND button or some other designated key stroke. An IS-136: Call Origination<FAC> 1602 message is sent to, for example, VAP 103A which forwards the message upstream through the RDT 102 and LDS 104 (not shown) to the controller 1230 of the NSP 106 as Call Origination <FAC> 1603 message.  
20 The controller 1230 updates information for the subscriber in memory 1240 that includes a database, and sets the UPOCH service feature active for the subscriber at step 1604.

The controller 1230 of the NSP 106 then sends UPOCH FAC ACK 1605 acknowledgment message back to the subscriber's mobile station MS 101A through the

LDS 104, RDT 102 (not shown) and VAP 103A (UPCH FAC 1606). After the acknowledgement signal has been received a character on the mobile station MS 101A, for example on a display screen, may be illuminated to indicate that the UPCH service is active.

The database in memory 1240 may contain, among other things, a profile for each subscriber including services available to the subscriber and preferences of the subscribers which can be dynamically changed by a subscriber telephonically, over the Internet, or otherwise.

If a subscriber desires to deactivate the UPCH feature, the subscriber can enter a feature deactivation code FDC (e.g., the AFC code plus \*3) and press, for example, the SEND button on his mobile station MS 101 as shown in step 1607. An IS-136 Call Origination <FAC\*3> 1608 message having the feature deactivation code is then sent upstream to the controller 1230 of the NSP 106 by way of, for example, the VAP 103, RDT 102, (not shown) and LDS 104 (Call Origination <FAC> 1609) . The controller 1230 of the NSP 106 updates the subscriber's profile in memory 1240 by setting a UPCH feature flag inactive. The controller 1230 of the NSP 106 may then send an acknowledgment message, UPCH FDC ACK 1611, back to the subscriber's mobile station MS 101A through, for example, the LDS 104, RDT 102 (not shown) and VAP 103A (UPCH FDC ACK 1612). After the acknowledgement signal has been received by the MS 101, an UPCH indicator on the mobile station MS 101A may be turned off to indicate that the UPCH service is inactive.

Another illustrative implementation of the UPCH service feature will now be described in connection with call flow diagram of figure 17. An incoming call 1701 to a mobile station MS 101A is delivered to the controller 1230 of the NSP 106. The incoming call 1701 can originate anywhere in the communications network including from a caller in

a cellular system (e.g., MS 101), wireless centrex system (e.g., mobile station MS 101B), the PSTN 125 (e.g., landline phone 1215), or any local and long distance network.

The controller 1230 retrieves profile information 1702 associated with the called party from the memory 1240. If the UPOCH active flag is set for the called party, the  
5 controller 1230 can send a short message (SM) <Reason, Caller ID> 1703 to the VAP 103A with which the called party mobile station MS 101A has registered. The SM transmitted to the called party indicates that an incoming call exists and may further include caller ID data such as the calling party's name and/or number.

The short message may be transmitted to the called party in a portion of the DCCH  
10 known as a short message service channel (SMSCH). An exemplary implementation of the short message is described in the IS-136 EIA/TIA Interim Standard. The SMSCH can carry signal information for set up and delivery of short alphanumeric messages from the NSP 106 to the mobile station 101A of the called party. The SMSCH is a logical sub-channel of the SMS point-to-point messaging, paging, and access response channel (SPACH), which is a  
15 logical channel of the DCCH. The DCCH operates on a set of frequencies separate from those used to support cellular conversations, which may be carried on the DTC.

After the SM 1703 is received by the VAP 103A at which the called party's mobile station MS 101A is registered, according to this illustrative embodiment, the VAP 103A follows the IS-136 specification by first sending a SPACH Notification 1704 message to the  
20 called party's mobile station MS 101A. The mobile station MS 101A sends a SPACH Confirmation 1705 acknowledgement message to VAP 103A and then the VAP 103A sends RDATA 1706 message including the short message SM to the mobile station. Thereafter,

the mobile station MS 101A acknowledges receipt of RDATA by sending RDATA Accept 1707 message back to the VAP 103A.

When the short message is delivered to the called party, it is displayed on the called party's mobile station MS 101A. Thus, the called party knows that an incoming call exists  
5 and the identity of the caller through the caller ID information displayed on the called party's mobile station. The called party then can decide how to handle the incoming call. Options available to the subscriber may include: a) answer the call immediately; b) delay answering the call; c) immediately forward the call to voice mail; d) forward the call to another number; e) reject the call; f) send a short message to the calling party; and g) take no  
10 action. The calling party can select an option by, for example, pressing one or more keys on the mobile station keypad or pressing a touch screen. A discussion of the operation of some of the possible mobile station MS 101 user UPCH selections follows.

According to a first aspect of the UPCH feature implementation, when the called party desires to answer the incoming call immediately he depresses a button or key (e.g.,  
15 TALK or SEND) at the mobile station MS 101A. A call origination message is then transmitted upstream in the DCCH to the VAP 103A and up to the LDS 104 and NSP 106. The NSP 106 immediately allocates a voice channel between the LDS 104 and the mobile station 101A that connects with the voice path previously established between the calling party and LDS 104 when the calling party first initiated the call, to thus establish a point-to-  
20 point voice channel between the calling and called party. High priority may be given to the called party's request for a voice path e.g., a DTC channel may be quickly allocated.

According to a second aspect of the UPOCH feature, a MS 101 user may chose to delay answer of a call and would enter a different function code, for example, pressing "\*1, Send". This key stroke would forward the incoming call to an announcement stored in the voice processing unit (VPU) 1235 of the NSP 106. Figure 18 shows an exemplary call flow diagram for the delay answer call option in accordance with an illustrative embodiment of this aspect of the present invention.

First, an incoming call is provided with a voice path 1801 between the calling party and LDS 106. The LDS 106 passes the incoming call 1701 including a route query to the controller 1230 of the NSP 106. The controller 1230 retrieves the profile of the called party from memory 1240. If the UPOCH service is active for the called party, a short message SM <Reason, Caller ID> 1703 is sent to the mobile station MS 101. As described above and shown in figure 17, steps 1704-1707 follows and the user is provided an opportunity to determine in real time how to handle the incoming call.

The called party receives the message and decides that he wants to answer this call after some delay. So the called party enters a delay answer feature code such as "\*1 SEND" 1808 and an IS-136: Call Origination 1809 message, with "\*1" as the keyed input, is sent upstream to the NSP 106 by way of VAP 103A (Call Origination 1810). The controller 1230 receives the message, updates the called party's database in memory 1240 with current status information, and instructs the LDS 104 using Reroute to VPU 1811 to connect the calling party's voice path to the VPU 1235. The VPU 1235 plays a brief message, such as "Please wait, [the called party name] will be with you shortly" in step 1812 and places the call on hold (with or without white noise generated by a DSP).



When the called party subsequently becomes available and desires to be connected with the on hold calling party, he enters a key feature code such as “\*7 SEND” in step 1813. An IS-136: Call Origination <FC\*7> 1814 message, with “\*7” as the feature code, is sent to VAP 103A which forwards the Call Origination 1815 message to NSP 106. The controller 1230 of the NSP 106 receives the message, updates the status of the called party in memory 1240, and retrieves the active call information. If the calling party is still holding, the controller 1230 instructs the VAP 103A to barge into the voice path established between the calling party and VPU 1235 (or DSP), establishing a three-way connection. Then, the controller 1230 instructs the VPU 1235 (or DSP) to disconnect from the voice path using Call Disconnect 1818 message, leaving the called party and calling party on the voice path. If the calling party is not on hold, the NSP 106 can instruct the VAP 103A to dial the last incoming call in the called party’s record in memory 1240.

According to another aspect of the UPCH feature, a mobile station user can in real time forward an unanswered incoming call to voice mail by entering a function code, for example by pressing “\*2, SEND”. In this instance, an origination message with “\*2” is sent upstream in the DCCH to the LDS 104. The LDS 104 then routes the call to a VMS 107 coupled to the LDS 104, where the calling party can leave a voice message.

Similarly, according to a further aspect of the UPCH feature, a mobile station user can in real time forward an unanswered incoming call to another DN or extension by entering a function code, for example by pressing “\*3, and [the number of the forwarding location], SEND”. The id number of the forwarding location is transmitted upstream to the LDS 104 and NSP 106 which examines the id number to which the call is to be forwarded. If the id number matches a number in the system associated with LDS 104 or LDS 104A,

etc., the call is processed accordingly. Otherwise, the call is routed through, for example, the PSTN 125 to the appropriate end DN to receive the call.

According to another aspect of the UPCH feature, a mobile station user can in real time reject an unanswered incoming call by entering a function code representing a rejection key sequence, for example, “\*4 SEND”. In response an origination message with “\*4” is sent upstream to the LDS 104 and NSP 106 in the DCCH. A message indicating that the called party is not currently accepting calls may be issued by, for example, VPU 1235, to advise the calling party. Alternatively, a tone may be transmitted from the LDS 104 to the calling party when the LDS 104 and/or NSP 106 detect a call reject flag.

According to still another aspect of the UPCH feature, a mobile station user can in real time create a short message and send it to the calling party of an unanswered incoming call by the called party entering a function code along with a message, for example, “\*6, [a brief alphanumeric or voice message], SEND”. The short message travels upstream in the DCCH to the LDS 104 and NSP 106, where it is transmitted downstream to the calling party. Voice synthesis in the VPU 1235 or DSP in the VAP 103 may be used to convert the alphanumeric message to a voice message. This feature may be particularly advantageous when the called party is busy and simply wants to communicate a brief real time message such as “Call you back in ten minutes” or “Meet me at home at 6:00”.

According to a further aspect of the UPCH feature, the called party can also chose to take no affirmative action so that a default action is implemented after a prescribed time period in the which the called party has failed to respond lapses. Default conditions may include, but are not limited to, forwarding the call to voice mail or letting the call go

unanswered. The default condition for a particular subscriber is defined in the subscriber profile stored in memory 1240 of the NSP 106. Thus, if the NSP 106 fails to receive any response from a called party, the NSP 106 will automatically process and terminate the call according to the called party's profile.

5           The UPOCH service of the present invention can be integrated with an automatic call handling service, where based on certain criteria, a call can be handled automatically, and based on other criteria, a call can be handled by the UPOCH service. For example, a user may want all calls forwarded to voice mail from 10:00PM to 8:00AM and from 8:00AM to 10:00PM desire to process and terminate calls proactively. Also, a user may want all calls  
10   originating from certain IDs to be handled automatically while the remainder of the calls can be processed and terminated proactively. Further, a called party may desire to process and terminate calls proactively based on the physical location of the called party (e.g., office v. home). All this information can be defined and programmed in the called party's profile in the memory 1240 so that the NSP 106 knows how to route an incoming call properly  
15   according to a user's predefined or system default preference settings.

          According to another illustrative embodiment of the invention, the NSP 106 can transmit a user alert, such as a tone, over the control channel to the called party to apprise the called party of an incoming call. A user alert can be incorporated with or without the SM application of UPOCH described above. In response to the user alert, the called party can  
20   process and terminate the incoming call in real time as described above. Different tones can be assigned in the called party's profile in the memory 1240 so as to uniquely or specifically identify the calling party.

Further, the UPOCH feature provides the ability to delay allocation of the voice channel to a called party until when, if at all, the incoming call to the called party requires a voice channel. This is carried out by allowing a called party to receive notification of an incoming call over the control channel and to return the selection of the call handling options upstream over the control channel. Thus, a voice channel need not be allocated until the called party decides to answer the call. This can be beneficial in wireless environments to prevent the unnecessary allocation of voice channels. Once the called party needs a voice channel, the incoming call has priority for available voice channels.

## **XII. Call Transfers**

From time to time a telephone user, particularly a mobile phone MS 101 user, has need to transfer an active call to another telephone DN. Such situation arise when the other party needs to talk with someone else or would like to access a voice mail message in, for example, a VMS. In such instances the mobile station MS 101 user needs a quick, user friendly means to transfer the active call to another DN, i.e., the transfer-to DN (TransferDN).

The call transfer feature/function allows the WCS MS 101 user to transfer an active call to another DN. The transfer-to DN can be either inside or outside the WCS network. The two exemplary embodiments provided below illustrate the call transfer feature/function where an active call is transferred from a WCS mobile station (e.g., MS 101A) to another mobile station (e.g., MS 101B) or to a PSTN telephone (e.g., PSTN 1215), respectively.

Referring to Figure 19, a first preferred embodiment for the call transfer feature/function shows a call transferred by a mobile station MS 101 user from mobile

station MS 101 to PSTN DN2 (1215b) outside the WCS. Initially, it is assumed that a call between MS 101 and PSTN DN1 is in progress and the LDS 104 and VAP 103 identify this existing call as call reference 1 (Call in progress, CR=1 1900 shown as dashed lines at the top of Fig. 19). The MS 101 user may transfer an active call by entering a feature/function code for call transfer and digits associated with the DN to which the call is to be transferred. For example, the MS 101 user may enter on the MS 101 keypad the digits in the format of, for example, \*77#TransferDN (the transfer-to DN is denoted as the TransferDN) and the "send" button. Each time a digit is pressed on the MS 101 a IS-136 Send Burst DTMF message is sent to the VAP 103 which in total is represented by the IS-136 Send Burst DTMF [\*77#TransferDN] 1901 message, corresponding to all of the digits pressed. Then, by the MS 101 user pressing the "send" button, the MS 101 sends an IS-136 Flash With Info message to the VAP 103 indicating that the previously sent IS-136 Send Burst DTMF messages are complete and represent the end of the transmission representing a call transfer request.

Upon receiving each DTMF message from MS 101, the VAP 103 sends an IS-136 Send Burst DTMF ACK 1902 message to the MS 101. After receiving the Flash With Info 1903 message from MS 101, VAP 103 sends a unique Feature Request message including the collected digits to the NSP 106, e.g., Feature Request [\*77#TransferDN] 1904 message.

When the NSP 106 receives the Feature Request [\*77#TransferDN] 1904 message it identifies that the digits \*77# is the feature code for the Call Transfer feature. Then the NSP 106 analyzes the feature code digits and validates via the WCSD in, for example, memory 1240, whether MS 101 is authorized for the feature requested. If MS 101 is authorized to use the call transfer feature requested, the validation is successful and NSP 106 sends a

Feature Request ACK [Play Voice Prompt (Transfer)] 1906 message to VAP 103 with the action as 'Play Voice Prompt' instructing VAP 103 to play an announcement/tone to the MS 101 user (and/or the PSTN DN1 1215b) indicating that a call transfer has been authorized (Voice Prompt 1907). Similar to the Call Hold feature/function procedure, the MS 101 and the PSTN DN1 1215b may be provided comfort noise by a digital signal process (DSP) to maintain continuity. However, if the validation of the Call Transfer feature/function request at NSP 106 is unsuccessful, the NSP 106 sends a Feature Request NACK (Not Acknowledged) message to VAP 103 prompting it to play an appropriate announcement/tone to the MS 101 indicating that the call transfer feature/function is not available and the call will not be transferred to the requested transfer-to DN (e.g., a Feature Request NACK [Play Voice Prompt (Transfer Not Allowed)] message is sent to VAP 103).

Once the call transfer has been authorized and the NSP 106 has sent a Feature Request ACK message to VAP 103, the NSP 106 sends a unique Transfer message, Transfer [CR=1, TransferDN] 1908, to the VAP 103 including the MSID of the requesting mobile station MS 101, the VAP ID to which the message is directed, the call reference number (e.g., CR=1) and the transfer-to DN, TransferDN, to execute the call transfer procedure. The NSP 106 also starts the TCT2 timer to ensure that the active call will not stay on hold indefinitely if for some reason the call is not properly transferred to the transfer-to DN.

In response to the Transfer [CR=1, TransferDN] 1908 message, the VAP 103 sends an information message, Q.931 Info [CR=1, Transfer] 1909, to LDS 104 to request the call transfer for the current call (CR=1). In return, the LDS 104 sends a Q.932 Hold [CR=1] 1910 message to the VAP 103. Then VAP 103 places the call on hold and sends a Q.932 Hold ACK [CR=1] 1911 message back to the LDS 104. VAP 103 also sends a Q.931 Setup

[CR=2, TransferDN] 1913 message having the call reference CR=2 and the transfer-to TransferDN to the LDS 104. The LDS 104 initiates the ISUP connection to the TransferDN (PSTN DN2 1215a in the figure), and VAP 103 waits with the call on hold for the Q.931 Connect [CR=2] 1920 message from LDS 104.

5 In establishing the call initiation with PSTN DN2 1215a, PSTN DN2 1215a (i.e., PSTN switch which services DN2) receives an ISUP IAM 1914 message from LDS 104 and VAP 103 receives a Q.931 Call Proceeding 1915 message from LDS 104. In response, PSTN DN2 1215a send an ISUP ACM 1916 message to LDS 104 and LDS 104 provides a Q.931 Alerting 1917 message to VAP 103. A Ringback Tone 1918 is provided to MS 101  
10 so that the MS 101 user understand that the TransferDN is being alarmed as an incoming call. When PSTN DN2 1215a answers the call, an ISUP ANM 1919 message is sent to LDS 104. The LDS 104 recognizes that the incoming call has been answered by the PSTN DN2 and sends the Q.931 Connect [CR=2] 1920 message to VAP 103.

15 However, the MS 101 user can interrupt the call transfer before the called party at PSTN DN2 1212a answers (i.e., before the call is transferred), by for example pressing the send button on the MS 101 twice. In a situation when the MS 101 user is getting a busy signal or PSTN DN2 1215a is still ringing and the MS user presses the send button once, the message generated from the MS 101 will be ignored by the NSP 106. However, if the MS  
20 101 user presses the send button twice within a short period of time (e.g., a one-second period) and the call has not yet been answered by the PSTN DN2 1215a (the ISUP ANM 1919 message and Q.931 Connect [CR=2] 1920 message have not been generated), the NSP 106 identifies that the MS 101 is requesting to retrieve the held call and terminate the call

transfer. Thus, in response the system will retrieve the original call (CR=1) and release the second call (CR=2).

Assuming that the MS 101 user does not interrupt the call transfer and the PSTN DN2 1212a answers, the PSTN DN2 1215a sends the ISUP ANM 1919 message to LDS 104 and the LDS 104 sends the Q.931 Connect [CR=2] 1920 message to the VAP 103. When the VAP receives the Q.931 Connect [CR=2] 1920 message from the LDS 104, it acknowledges connection with the PSTN DN2 and sends a Q.931 Connect ACK 1921 message back to LDS 104 and sends a Transfer Result [TransferDN, Answered] 1922 message to NSP 106 informing the NSP 106 that the TransferDN has answered. The unique Transfer Result message includes the MSID, VAP ID, Call Reference Number (e.g., CR=2), and Cause (e.g., success/fail).

When the NSP 106 receives the unique Transfer Result [Transfer DN Answered] 1922 message from VAP 103 informing that the TransferDN has answered, the NSP 106 updates the call transfer status and cancels the TCT2 timer. If the timer TCT2 expires before receiving the Transfer Result 1922 message, the NSP 106 shall deactivate the Call Transfer feature by sending a Feature Request NACK message (not shown) in response to the Feature Request from VAP 103. Then the VAP 103 shall send a Q.932 Retrieve [CR=1] message (not shown) to the LDS 104, which retrieves the held call [CR=1] and sends a Q.932 Retrieve ACK back to the VAP 103.

In the case that the Transfer Result [Transfer DN Answered] 1922 message is received by NSP 106 with the Transfer DN Answered message, if the MS 101 user now presses, for example, the "send" button once, an IS-136 Flash with Info 1923 message is sent to the VAP 103 to initiate completion of the call transfer (connecting call CR=1 from



the PSTN DN1 1215b to the LDS 104 to the call CR=2 from the LDS 104 to the PSTN DN2 1215a). In response, the VAP 103 sends a Feature Request [FlashWithInfo] 1924 message to NSP 106 to request completion of the call transfer and send an IS-136 Flash with Info Ack 1925 message to MS 101 to acknowledge the call transfer completion request by the

5 MS 101 user. Then NSP 106 determines that this is a call transfer completion action request, and sends a Feature Request ACK[Transfer (CR=2)] 1926 acknowledgment message back to VAP 103 indicating that the Call Reference to be transferred equals to 2 (CR=2). VAP 103 then requests LDS 104 to complete the call transfer by sending a Q.931

10 Info [CR=2, Transfer] 1928 message to LDS 104, so that the LDS releases from the VAP 103 both call references (CR=1 and CR=2), the VAP 103 releases the RF to the MS, and the transferred call is left in progress between PSTN DN1 1215b and PSTN DN2 1215a (Transferred Call in progress 1937).

To release MS 101, VAP 103 sends an IS-136 Release 1927 message to MS 101. In response, MS 101 releases the voice channel air connection with VAP 103 and sends an IS-

15 136 Mobile Ack 1930 acknowledgment message back to VAP 103 indicating that it has been released from the active call. To release VAP 103 from the active calls CR=1 and CR=2, LDS 104 sends a Q.931 Disconnect [CR=1] 1929 message and a Q.931 Disconnect [CR=2] 1933 message to VAP 103. VAP 103 responds by sending a Q.931 Release [CR=1] 1931 message and a Q.931 Release [CR=2] 1934 message to LDS 104. In return, LDS 104

20 sends a Q.931 Release Complete [CR=1] 1932 message and a Q.931 Release Complete [CR=2] 1935 message to VAP 103 to indicate that the LDS 104 has completed the call release process.

Once VAP 103 completes the Q.931 release procedures with LDS 104, it sends a Transfer Complete [Success] 1936 message to NSP 106 to indicate to the NSP 106 that the call is no longer active with mobile station MS 101 in the WCS. The Transfer Complete message includes the MSID, the VAP ID, the call reference numbers (CR=1, CR=2), and a  
5 cause (success/fail) field. At this point the call transfer process has been completed successfully and the active call has been transferred from PSTN DN1 1215b and MS 101 to PSTN DN1 1215b and PSTN DN2 1215a.

Referring to Figure 20, a second preferred embodiment for the WCS call transfer feature/function shows a call transferred by a mobile station MS-1 101a user from mobile  
10 station MS-1 101a to another mobile station MS-2 101b within the WCS. In this embodiment, many of the signal flows in the call transfer process are the same as those in the first preferred embodiment for the call transfer feature/function and thus have the same number designations. The primary difference is the call setup procedure for setting up an incoming call to the second mobile station MS-2 101b and its related VAP, VAP2 103b, as  
15 described below.

The signal flow to initiate call transfer of an active call in progress from one mobile station MS-1 101a to another mobile station MS-2 101b in the same WCS is the same as the signal flow to initiate call transfer from a mobile station MS 101 to a telephone, PSTN DN2 1215a outside the WCS. As such, from the point at which a mobile station (MS-1 101a)  
20 user involved in an active call in progress (Call in progress, CR=1, 1900) enters the call transfer feature/function activation code by pressing the digits in the format of \*77# with the desired transfer-to DN, TransferDN, followed by the "send" button (results in the MS-1 101a sending an IS-136 Send Burst DTMF[77# TransferDN] 1901 message to VAP1 103),

up to the point when the active call is placed on hold (Call held, CR=1 1912) and the VAP1 103a sends the Q.931 Setup [CR=2, TransferDN] 1913 message is sent to LDS 104, the signal flows (1901-1913) are the same. Thus, in the second embodiment of the call transfer WCS feature/function of the invention, the call transfer is initiated by the MS, authorized by the NSP, and the active call is placed on hold (with appropriate prompt) awaiting further disposition by the WCS, for example, completed transfer of the held call to a second mobile station MS-2 101b as described below.

The Q.931 Setup [CR=2, TransferDN] 1913 message instructing LDS 104 to setup a second call with the transfer-to DN triggers an AIN query from LDS 104 to NSP 106 so that a TCAP (AIN Termination\_Attempt [TransferDN]) 2001 message is provided to NSP 106. The NSP 106 verifies the location of the TransferDN within the WCS. Next, the MS-2 101b is paged with IS-136 Page Request 2002 message and the VAP1 103a waits for the Q.931 Connect [CR=2] 1920 message from LDS 104 (after the LDS 104 receives Q.931 Call Proceeding and Alerting messages). While VAP1 103a waits a voice channel connection with MS-2 is established as follows.

After MS-2 101b receives the IS-136 Page Request 2002 message, MS-2 101b send an IS-136 Page Response 2003 message to VAP2 103b and VAP2 103b sends Page Response 2004 message to NSP 106. This triggers an AIN message, TCAP (AIN Forward\_Call [VAP2-FDN], NEL [O\_No-Answer]) 2005, sent by NSP 106 to LDS 104. As a result, the NSP 106 has provided routing instructions that direct LDS 104 to forward the active call on hold to the Forward Directory Number (FDN) of VAP2 (i.e., VAP2-FDN). NSP 106 has also indicated with this message its interest in event (O\_No\_Answer for

VAP2-FDN) by sending next event list NEL [O\_No\_Answer]) information to LDS 104 in the Request component that accompanies the Routing component.

LDS 104 then starts a No Answer Timer (T(NoAnswer)) for VAP2-FDN (not shown) and sends an ISDN Q.931 Setup [CR=2, FDN] 2006 message to the VAP2 103b.

5 VAP2 103b then sends a Digital Traffic Channel (DTC) Designation 2007 message to the MS-2 101b designating the traffic channel to be used and an ISDN Q.931 Call Proceeding 2009 message to the LDS 104 that triggers the Q.931 Call Proceeding 2010 message sent to VAP1 103a. MS-2 101b then tunes to the traffic channel and responds to VAP2 103b with an IS-136 Mobile on DTC 2008 message. VAP2 103b detects that the MS 101 is on the  
10 appropriate traffic channel. VAP2 103b then alerts MS-2 101b with an Alert-with-info 2011 message and MS-2 101b acknowledges with an IS-136 Mobile ACK 2015 message. VAP2 103b also sends an ISDN Q.931 Alerting 2012 message to LDS 104 which triggers a Q.931 Alerting 2013 message to VAP1 103a. Meanwhile, the LDS 104 is sending a Ringback Tone 2014 to MS-1 101a user.

15 When the MS-2 101b answers (before T(NoAnswer) timer expires) the MS-2 101b generates an IS-136 Connect 2016 message to the VAP2 103b and the VAP2 103b sends an ISDN Q.931 Connect message 2017 to the LDS 104 in response to the IS-136 Connect 2016 message from MS-2 101b. At this point the call transfer procedure continues the same as in the previous embodiment so that the MS-1 101a user can enter the appropriate key sequence  
20 to instruct the WCS to complete the call transfer process (steps 1920 – 1937). As a result, the active call in progress (CR=1) between PSTN 1215 and MS-1 101a is transferred so that the active call in progress is between PSTN 1215 and MS-2 101b.

It should be appreciated that transferring a call from a mobile station in one WCS to a mobile station in another WCS could also be achieved by the NSP 106 providing the LDS 104 with routing instructions including a FDN indicative of a VAP 103 and MS 101 in the other WCS. Such a case could be achieved using a procedure similar to the procedure  
5 illustrated in Figures 19 and 20.

### **XIII. Caller ID**

The Caller ID feature of the present invention allows display on the MS 101 of the originating directory number for the calling party's desk top telephone (Calling Party Number, DN<sub>O</sub>) and identity (e.g., name) for an incoming and/or active call, even if the call  
10 originates from another MS 101. Further, the Caller ID information may include location information, e.g., building number, derived from the forward directory number (FDN) of the originating VAP 103 (VAP<sub>O</sub>). In addition, the Caller ID feature of the present invention may provide the location and identity of the called MS 101 to the calling party and displayed on the calling party's MS 101 during an active call. In either case, a Network Server  
15 Platform (NSP) 106 provides a MS 101 user's desk top phone directory number, DN<sub>O</sub>, as their telephone number for Caller ID rather than the forward directory number (FDN) associated with an originating VAP 103, VAP<sub>O</sub> 103, with which the MS 101 is currently associated.

The caller ID or the calling party identification is the number associated with the  
20 phone from which the call is originating. The WCS Caller ID feature allows the calling party's phone number, identify, and related information to be displayed on the WCS mobile handset, MS 101.

Caller ID for a call originating from a PSTN 125 to an MS 101 in a WCS will occur much the same way that caller ID occurs entirely within a PSTN 125. The WCS Caller ID feature will present to the MS 101 in the WCS environment all the information that the PSTN 125 passes to the VAP 103, e.g., calling party telephone number and calling party  
5 name. However, if the PSTN 125 does not pass this info to the VAP 103, (e.g., caller id blocking), the VAP 103 can not, and does not, present any calling party information to the MS 101.

Caller ID for a call originating from a WCS MS 101 is different than caller ID for a call originating from a PSTN 125 because the MS 101 is wireless and is associated with the  
10 forward directory number of a VAP 103, rather than the directory number (DN) of a stationary telephone. Due to the wireless nature of the MS 101 and its association with a VAP 103 (or a number of different VAPs) in a WCS, Caller ID for calls originating from an MS 101 in a WCS requires unique treatment in order to provide a calling party telephone number and name which is recognizable. In the case that the WCS user has both a desk top  
15 telephone and a MS 101, the problem may be solved by the NSP 106 providing the users desk top telephone DN for Caller ID purposes, regardless of what VAP 103 the MS 101 is associated with at any point in time. Alternatively, if the MS 101 user does not have a desk top telephone within the WCS the NSP 106 may be programmed to provide any telephone number, for example the MS 101 user's home number, the business main number, or the  
20 FDN of the VAP 103 to which the MS 101 is currently associated. Although the Caller ID feature/function of the present invention will be described with respect to a call between one MS 101 and another MS 101 having the same NSP 106, one skilled in the art will recognize that Caller ID for an MS 101 originating a call may similar be provided if the mobile

stations 101 have different NSPs 106 which can communicate so as to pass the Caller ID information to one another.

The preferred embodiments of the WCS Caller ID feature/function provides calling party information to the called party (e.g., phone number, name, address, building number, etc.) for a call between two WCS users, e.g., an originating mobile station, MS<sub>O</sub> 101, and a terminating mobile station, MS<sub>T</sub> 101. This intelligence is managed by the NSP 106 and thus also enables called party information to be provided to the calling party, e.g., location of the called party. Three preferred embodiments are provided below: (1) the intelligence of the NSP 106 is used to correlate originating and terminating call legs of a call and sends the appropriate caller ID information; (2) an information element in the call control message, such as the Q.931 Calling Party Subaddress information element of the Setup message, is used to provide caller ID information; and (3) a signaling protocol that supports non-call associated temporary signaling for user to user data transfer, e.g., the Q.931 User Information message, is used to provide caller ID information. These embodiments are merely exemplary.

Providing the Caller ID features/functions for WCS to WCS calls can be simplified into two general tasks. First, the NSP 106 must be updated with the originating party information of every call that originates from a WCS MS 101. This can be done during the call origination and hence we categorize these tasks as being included in the call origination leg. To provide the terminating VAP, VAP<sub>T</sub> 103 with this information (the Caller ID information). These tasks can be categorized as the one that must be performed during the call termination leg.

A first preferred embodiment will now be described with reference to Figs. 21A – 21D. This embodiment depends on the intelligence of the NSP 106 to provide the correct Caller ID information. For a WCS (e.g., MS<sub>O</sub> 101) to WCS (e.g., MS<sub>T</sub> 101) call, the NSP 106 must perform the following two functions. First, the NSP 106 maintains originating party information of every originating call that terminates to a WCS user. Second, for every incoming call, the NSP 106 correlates the terminating leg of the call with the corresponding originating leg so as to retrieve the originating party information and pass this information to the terminating VAP<sub>T</sub> 103 to be provided to the terminating MS<sub>T</sub> 101. These functions require the NSP 106 to track the originating calls and match them to the correct terminating portion of the call.

As indicated above, providing caller ID information for this preferred embodiment splits the processing in two legs – the origination request (leg) and the termination request (leg). The information regarding the caller of each call originated is recorded at the NSP 106 and during the termination of any call (in this case within the WCS); the caller id related information is extracted based on the calling VAP's 103 FDN.

Referring now to Figure 21A, a flowchart for caller ID information retrieval procedure is provided and shows the origination leg of the WCS Caller ID feature/function according to a first preferred embodiment. When a call originates from a WCS subscriber's originating MS<sub>O</sub> 101 to another WCS subscriber's terminating MS<sub>T</sub> 101 (for simplicity, both MS<sub>O</sub> 101 and MS<sub>T</sub> 101 are served by the same NSP 106), as a first step in the origination leg, step 2101, the MS<sub>O</sub> 101 originates a call to MS<sub>T</sub> 101. Next, at step 2102 the VAP 103 will send the WCS origination request, which will contain the FDN associated with the serving VAP 103 to the NSP 106, along with the originating MS<sub>O</sub> 101 id, i.e. MSID. Then,



at step 2103, the NSP 106 uses the MSID to determine whether the WCS user (MS<sub>O</sub> 101) is registered within the WCS. If not, the NSP 106 rejects the MS origination at step 2104. If the MS<sub>O</sub> 101 is registered with the WCS the NSP at step 2105 determines if the MS<sub>O</sub> 101 has called (requested) a WCS number as the terminating number DN<sub>T</sub>. If not, the NSP 106 follows the normal call processing at step 2107 and sends an origination ack message.

However, if the NSP 106 determines that the called termination number DN<sub>T</sub> is within the WCS, the NSP extracts the DN<sub>O</sub>, i.e. the DN of the desktop associated with the MSID of the originating MS<sub>O</sub> 101 and records the originating user information along with the DN<sub>T</sub>, at step 2106, in a Caller ID table. This mapping between the MSID and the corresponding DN can be found in the subscriber information in the WCS database (WCSD). Thus, the NSP 106 in step 2106 stores the DN<sub>O</sub> and the FDN information against the DN<sub>T</sub>, i.e. the DN of the phone where the call has to terminate, in a record and subsequently continues the normal call processing by, for example, sending an origination acknowledgement message in step 2107.

Referring now to figure 21B, when the call comes to the termination leg the LDS 104 at step 2108 sends, for example, an AIN TAT message to the NSP 106 which includes, for example, the DN<sub>T</sub> and the FDN of the originating VAP, VAP<sub>O</sub> 103, information in it. Next, in step 2109, the NSP 106 checks to determine that the Caller ID table in the WCSD has an entry for the DN<sub>T</sub> which matches the originating FDN. If there is a match of the DN<sub>T</sub> and the FDN, the NSP 106 retrieves the caller ID information, for example, the desktop telephone directory number DN<sub>O</sub> for the originating mobile station, MS<sub>O</sub> 101, and sends it to the termination VAP, VAP<sub>T</sub> 103, in, for example, a page request message, as shown at step 2110. Then, the caller ID information, for example, DN<sub>O</sub>, may be sent by the VAP<sub>T</sub> 103 to

the MS<sub>T</sub> 101 in, for example, an IS-136 Alert with Info message. As a result, the MS<sub>T</sub> 101 will display the caller ID information, for example the DN<sub>O</sub>, on the MS<sub>T</sub> 101.

On the other hand, if at step 2109, the NSP 106 does not find a caller ID match for the DN<sub>T</sub> with the originating FDN or there is no specified DN<sub>O</sub> within the database for MS<sub>O</sub> 101, the NSP 106 sends, for example, a page request message to the terminating VAP<sub>T</sub> 103 without a DN<sub>O</sub>. Then, at step 2113, the VAP<sub>T</sub> 103 sends the calling party number contained in, for example, a Q.931 Setup message, which may be the FDN of the originating VAP. It should be noted that the DN<sub>O</sub> related information can be stored at the NSP 106, and can be used for the other features like call return, call screen etc for this call.

Clearing of the calling party number related information records from the NSP 106 may be handled as follows. The caller id related records are created during the call origination and may be cleared off during call termination. Certain information may be required to be updated at the NSP 106 before the caller id related record is cleared. For instance, the "last calling party number" is needed for call return feature; hence a field holding this value shall be updated. The caller id record for a call may be cleared from the NSP 106, if any of the following occur: (1) when NSP 106 has paged the MS 101 with the DN<sub>O</sub> information, (2) when a call fails during the origination attempt, (3) when the call is delivered to the desktop phone, and (4) when the call is treated as the waiting call in case of the call-waiting feature (that is, when NSP 106 notifies VAP 103 of call waiting).

Furthermore, all the records may include a time stamp of the time when they are created, and the WCS may include periodic checking for the time stamps which are older than a certain amount of time, which if found, such records would be automatically and periodically cleared.

Referring to Figures 21C and 21D, exemplary signal flow diagrams are provided for a call origination and termination within the WCS for the first preferred embodiment of the Caller ID feature/function. As indicated by the flowcharts in Figures 21A and 21B, implementation of the Caller ID feature/function in this embodiment requires some additional things be done beyond the normal signal messages exchanges between VAP 103, NSP 106 and LDS 104.

An exemplary signal flow for the call origination leg of the first preferred embodiment for the Caller ID feature/function is illustrated in Figure 21C. During call origination the originating WCS MS, MS<sub>O</sub> 101, requests for the call origination by sending an IS-136 Origination 2114 message including an MSID to the VAP<sub>O</sub> 103 followed by optionally an IS-136 Serial Number message 2115 which includes the electronic serial number (ESN) of the MS<sub>O</sub> 101. Then VAP<sub>O</sub> 103 sends an Origination Request 2116 message to the NSP 106. The Origination Request 2116 message contains the Called party id i.e., DN<sub>T</sub>, the FDN of the originating VAP<sub>O</sub> 103, and the identification of the originating MS<sub>O</sub> 101 MSID and/or the ESN. The NSP 106 validates the originating MS<sub>O</sub> 101 and checks whether the termination directory number, DN<sub>T</sub> is a WCS subscriber. If it is, then NSP 106 searches the WCSD for a DN<sub>O</sub> of the MS<sub>O</sub> 101 associated with the MSID and, if one exists, extracts and records the DN<sub>O</sub> of the MSID as being correlated to the destination (termination) DN, DN<sub>T</sub>, as indicated in step 2117. In other words, the NSP 106 retrieves the DN associated with the originating MSID, e.g., the DN<sub>O</sub>, and records the FDN and the DN<sub>O</sub> against the called party DN, e.g., DN<sub>T</sub>. Next, the NSP 106 sends the Origination Ack 2118 message. Subsequently, signaling 2119 – 2127, illustrate normal Call processing to completion of a voice path between the MS<sub>O</sub> and the MS<sub>T</sub> (2128). Thus, the signal flow for

signaling 2119 – 2127 is similar to the usual origination call flow as described in the call processing section above (see, for example, Figure 4 and its related description).

Referring now to Figure 21D, an exemplary signal flow for the call termination leg of the first preferred embodiment for the Caller ID feature/function is illustrated. First, since in this case the incoming call is from another MS, MS<sub>O</sub> 101, within the WCS, a Q.931 setup message (triggered by, for example, Q.931 setup 2119 message) is received by the LDS 104 (not shown in figures). Alternatively, if the incoming call is from PSTN 125 an ISUP IAM message will be received by the LDS 104. In either case, the LDS 104 recognizes the incoming call as being directed to an MS 101 and thus sends an AIN TAT message, TCAP (AIN Termination\_Attempt [DN<sub>T</sub>, FDN]) 2129, to the NSP 106 so that the NSP 106 can provide information to the LDS 104 regarding the present location of the MS 101 associated with the termination directory number, DN<sub>T</sub>, so as to properly route the call. As illustrated, the AIN TAT message will contain the DN<sub>T</sub>, i.e., the called party ID, and the calling party number, which is the FDN of the originating VAP<sub>O</sub> 104 in the case where the call originates within the WCS.

Next, the NSP 106 attempts to match the originating terminal id, in this case the FDN of the originating VAP<sub>O</sub> 103 for this AIN TAT message, against the FDN, DN<sub>T</sub> pairs stored within its records (during the call origination leg). If there is a record with a matching FDN for the designated DN<sub>T</sub>, the NSP 106 will extract the previously stored caller ID information, for example DN<sub>O</sub>, from the WCSD and send it to the termination VAP, VAP<sub>T</sub> 103, in a Page Request [MSID, DN<sub>O</sub>] 2131 message. If no match is found, then DN<sub>O</sub> shall not be populated and the VAP<sub>T</sub> 103 shall receive the calling party number provided in the Q.931 setup message (e.g., a PSTN 125 DN or a VAP 103 FDN). In essence, if there are

no records with matching FDN, then there is no special information sent to the VAP<sub>T</sub> 103 in the Page Request 2131 message and VAP<sub>T</sub> 103 will present the calling party number information it gets from the Q.931 messages to the MS<sub>T</sub> 101. In any case, the usual call processing procedures follows at steps 2131 – 2141.

5 Then at step 2141, the VAP<sub>T</sub> 103 sends the caller ID information to the MS<sub>T</sub> 101 to, for example, display the caller ID information to the MS<sub>T</sub> 101 user. In the case there is a match, the VAP<sub>T</sub> 103 sends an IS-136 Alert with Info [DN<sub>O</sub>] 2141 message to the MS<sub>T</sub> with, for example, the DN<sub>O</sub> information and/or other caller ID information (from Page Request 2131 message or the Q.931 setup message) to provide the MS<sub>T</sub> 101 user with the caller ID  
10 information, which in the case is the caller ID information for the originating MS<sub>O</sub> 101 user (e.g., the DN<sub>O</sub> of the MS<sub>O</sub> 101 user's desk top telephone). If there is no match, the VAP<sub>T</sub> 103 sends an IS-136 Alert-with-Info 2141 message to the MS<sub>T</sub> 101 with the calling party number value from the Q.931 Setup 2137 message. Subsequently, at steps 2142 – 2150, the call processing for the Caller ID termination leg for this embodiment is similar or the same  
15 as those mentioned for a general call termination in the call processing section above (see, for example, Figures 5-7 and their related description).

A second preferred embodiment for the Caller ID feature/function will now be described with reference to Figs. 21E – 21H. This embodiment does not depend on the intelligence of the NSP 106 to provide the correct Caller ID information. Once again, this  
20 embodiment also splits the processing in two legs – the origination request (leg) and the termination request (leg). In this case the WCS relies on existing signaling protocol to forward the caller ID information without storing and subsequently matching the data in the WCSD for the originating VAP<sub>O</sub> 103 FDN and the termination MS<sub>T</sub> 101.

In this preferred embodiment, the caller ID information regarding the caller of each call originated (e.g., the DN<sub>O</sub> associated with the originating MS<sub>O</sub> 101) is sent by the NSP 106 to the originating VAP<sub>O</sub> 103 in, for example, the Origination Ack. The NSP 106 does not set up a record in the WCS<sub>D</sub> but merely extracts the caller ID information, for example the DN<sub>O</sub>, from the WCS<sub>D</sub> and sends it to the originating VAP<sub>O</sub> 103. The VAP<sub>O</sub> 103 then sends the calling party caller ID information (e.g., DN<sub>O</sub>) in an available field of an existing message sent to the LDS 104, for example, the subaddress IE of its Q.931 Setup message sent to the LDS 104. Subsequently, during the termination leg, the LDS 104 preserves and forwards this caller ID information to the terminating VAP<sub>T</sub> 103 in an existing call setup message, for example, in the subaddress IE of a Q.931 setup message that the LDS 104 sends to the terminating VAP<sub>T</sub> 103. This information can now be presented by the terminating VAP<sub>T</sub> 103 to the terminating MS<sub>T</sub> 101 through an existing call setup message, for example, an Alert with Info message. This general method of the second preferred embodiment is described in more detail below.

Thus, this approach is dependent on the ability of using an information element field of a call control message passed from the originating VAP<sub>O</sub> 103 to the destination VAP<sub>T</sub> 103. An example of this is the Q.931 Calling Party Subaddress field of the Q.931 Setup message. This field can be use to carry caller ID information regarding the calling party, such as the DN of the desktop phone associated with the originating MS, caller's name, caller's address, caller's location, etc.

Referring to the flowchart in Figure 21E, the process for the origination leg of the second preferred embodiment of the Caller ID feature/function is illustrated and will now be described. Once again, the embodiment illustrates a scenario for a call originating from a

WCS subscriber's MS, the originating MS<sub>O</sub> 101, to another WCS subscriber, termination MS<sub>T</sub> 101. First, at step 2151, the user of an MS 101 originates a call. Then, at step 2152, the VAP 103 sends a message to the NSP 106, for example, a WCS origination request message, which may contain the originating phone's ID, i.e. MSID, and the called party number, e.g., DN<sub>T</sub>. Next, at step 2153, the NSP 106 determines whether the MS 101 user is registered with the WCS. If the MS 101 is registered and valid, in step 2155 the NSP 106 retrieves the caller ID information, e.g., DN<sub>O</sub> (the DN of the desktop associated with the MSID) by accessing the mapping between the MSID and the corresponding DN which may be stored in, for example, the subscriber information in WCSD. The NSP 106 also forwards the caller ID information (e.g., DN<sub>O</sub>) to the VAP 103 in a typical call setup message, for example, an origination ack message. Then in step 2156, the originating VAP<sub>O</sub> 103 sends the caller ID information (e.g., DN<sub>O</sub>) to the LDS 104 in an available field of another typical call setup message, for example, the subaddress IE field of a Q.931 Setup message. However, if the MS<sub>O</sub> 101 is not a registered user, the NSP 106 will reject the origination message at step 2154.

Referring now to the flowchart in Figure 21F, the process for the termination leg of the second preferred embodiment of the Caller ID feature/function is illustrated and will now be described. First, in step 2157 the LDS 104 sends a typical call setup message, for example an AIN TAT message, to the NSP 106 so as to terminate the call at the DN<sub>T</sub> originated by the DN<sub>O</sub>. At step 2158 the NSP 106 responds by sending a typical call setup message to the VAP<sub>T</sub> 103 to which the termination MS<sub>T</sub> 101 is presently associated, for example a Page Request message. The VAP<sub>T</sub> 103 responds by sending a typical call setup message indicating that the desired MS<sub>T</sub> 101 is available via a Page Response message. The

NSP 106 instructs the LDS 104 to forward the incoming call to VAP<sub>T</sub> 103 using, for example, an AIN Forward\_Call message. At step 2159, the LDS 104 sends a typical call setup message to the terminating VAP<sub>T</sub> 103, for example a Q.931 Setup message. Since the originating VAP<sub>O</sub> 103 put the caller ID related info (e.g., DN<sub>O</sub>) in the subaddress IE of the Q.931 SETUP message, this info will be contained in, for example, the subaddress IE of the Q.931 SETUP sent from the LDS 104 to the terminating VAP<sub>T</sub> 103. As indicated at step 2160, if the subaddress IE field is populated with caller ID information, for example DN<sub>O</sub> for the calling MS 101, the VAP<sub>T</sub> 103 will receive the information and provide it to the MS<sub>T</sub> 101 via a typical call setup message, for example an IS-136 "Alert with Info" message. Otherwise, the VAP<sub>T</sub> 103 shall use the Calling party number information, e.g., the VAP<sub>O</sub> 103 FDN or the PSTN 125 DN from the Q.931 SETUP message.

Referring now to Figure 21G a detailed signal flow diagram for an origination leg of the second preferred embodiment of the Caller ID feature/function will now be described. First, an originating WCS MS, MS<sub>O</sub> 101, requests for call origination by sending an IS-136 Origination 2161 message and an optional IS-136 Serial Number 2162 message containing the ESN to the originating VAP<sub>O</sub> 103. Then, the originating VAP<sub>O</sub> 103 sends an Origination Request [MSID, DN<sub>T</sub>] 2163 message to the NSP 106. The Origination Request message contains the Called party ID, DN<sub>T</sub>, FDN of VAP<sub>O</sub> and the identification of the originating MS<sub>O</sub> 101, MSID and/or the ESN. Next, the NSP 106 validates the MS<sub>O</sub>, and retrieves the caller ID information, for example a DN<sub>O</sub>, associated with the MSID. The NSP 106 sends the caller ID information, e.g., DN<sub>O</sub>, to VAP<sub>O</sub> 103 in an available field of the Origination Ack [DN<sub>O</sub>] 2165 message.



Then the VAP<sub>O</sub> 103 sends the caller ID information, e.g., DN<sub>O</sub>, that it received from the NSP 106 in the Calling Party Subaddress IE of the Q.931 Setup [Subaddress IE = DN<sub>O</sub> info] 2166 message that it sends to the LDS 104. The LDS 104 will setup the call to DN<sub>T</sub> (this will trigger an AIN message in the terminating leg signal flow (see Fig. 21H)).

- 5 Subsequently, signaling 2167 – 2174, illustrate normal call processing to completion of a voice path between the MS<sub>O</sub> and the MS<sub>T</sub> (2175). Thus, the signal flow for signaling 2167 – 2174 is similar to the usual origination call flow as described in the call processing section above (see, for example, Figure 4 and its related description).

- Referring now to Fig. 21H, the signal flow for the terminating portion of an exemplary second preferred embodiment for a WCS MS to WCS MS call will be described. As indicated above, the originating MS<sub>O</sub> 101 user calls another WCS MS 101 subscriber's DN, the terminating DN<sub>T</sub>, and as a result the LDS 104 receives a Q.931 Setup [subaddress IE = DN<sub>O</sub> info] 2166 message. The LDS 104 finds that the DN<sub>T</sub> is provisioned for AIN Termination Attempt Trigger (TAT). As a result, the LDS 104 suspends the delivery of the call and sends an AIN query message, TCAP (AIN Termination\_Attempt [DN<sub>T</sub>, FDN]) 2176, to the NSP 106 for appropriate routing instruction based on the last known location of MS<sub>T</sub> 101. NSP 106 finds that the subscriber's MS 101 (MS<sub>T</sub>) associated with DN<sub>T</sub> is active and idle in its serving area, associated with VAP<sub>T</sub> 103. NSP 106 pages the MS<sub>T</sub> 101 through VAP<sub>T</sub> 103 with IS-136 established paging procedures, e.g., Page Request [MSID] 2178 and IS-136 Page 2179, and starts TT6 timer. As a part of the Page Request 2178 message, the NSP 106 shall send the Mobile's MSID. MS<sub>T</sub> 101 sends an IS-136 Page Response 2180 message followed optionally by IS-136 Serial Number 2181 message. When MS<sub>T</sub> 101 responds to the page, VAP<sub>T</sub> 103 selects a FDN for the call, and forwards it in a Page

Response [FDN] 2182 message to the NSP 106, and starts event timer TT10. Upon reception of Page Response [FDN] 2182, the NSP 106 will cancel TT6 timer and knows that the current VAP<sub>T</sub> 103 has the resources to serve the incoming call.

Next, the NSP 106 directs the LDS 104 to forward the call to the FDN (in a TCAP Conversation package) by sending the LDS 104 a TCAP (AIN Forward\_Call [FDN], NEL [O\_No\_Answer]) 2183 message. The NSP 106 indicates its interest in event (O\_No\_Answer for FDN) by sending next event list (NEL) information to the LDS 104 in a Request component, which accompanies the routing component, in the conversation package. The LDS 104 will start No Answer Timer (T(NoAnswer)) for FDN and send a Q.931 Setup [FDN, Subaddress IE =DN<sub>O</sub>] 2184 message to VAP<sub>T</sub> 103. When VAP<sub>T</sub> 103 receives the Q.931 Setup [FDN, Subaddress IE =DN<sub>O</sub>] 2184 message, it will cancel the TT5 timer, initiate an IS-136 DTC Designation 2185 message to MS<sub>T</sub> 101, start the TT2 timer, and send a Q.931 Call Proceeding 2186 message to the LDS 104. VAP<sub>T</sub> 103 will retrieve the calling party information first from Q.931 Calling Party Subaddress IE indicating that this call is from a WCS MS (refer to the Q.931 Setup [FDN, Subaddress IE =DN<sub>O</sub>] 2166 message in the originating call leg signal flow shown in Fig. 21G). If the subaddress is not populated then VAP<sub>T</sub> 103 will attempt to retrieve the calling party information from the Q.931 Calling Party IE indicating that this call is from the PSTN 125 or a VAP 103 FDN. If neither fields are populated, the calling party information can not be retrieved and therefore can not be presented to the called party.

Next, the VAP<sub>T</sub> 103 sends a DTC Designation 2185 message to the MS<sub>T</sub> 101 and the MS<sub>T</sub> 101 tunes to the traffic channel, MS on DTC 2187. When VAP<sub>T</sub> 103 detects that MS<sub>T</sub> is on the traffic channel via DVCC status change, it will initiate the Alerting procedures to

both call legs (i.e., the LDS and MS directions). Then VAP<sub>T</sub> 103 sends an IS-136 Alert-with-info message to MS<sub>T</sub> 101 along with the retrieved calling party caller ID information (if any) for example IS-136 Alert-with-info [DN<sub>O</sub>] 2188 message, and start the Alert timer (TT3). When MS<sub>T</sub> 101 receives the Alert-with-info message, it may notify the user with an alert, e.g., via ringing. MS<sub>T</sub> 101 then sends an IS-136 Mobile ACK 2189 message to the VAP<sub>T</sub> 103. When VAP<sub>T</sub> 103 receives the Mobile ACK 2189 from MS<sub>T</sub> 101, it will cancel TT3 timer and start TT4 timer, and enters the wait-for-answer call processing state. Subsequently, at steps 2190 – 2197, the call processing for the Caller ID termination leg for this embodiment is similar or the same as those mentioned for a general call termination in the call processing section above (see, for example, Figures 5-7 and their related description).

A third preferred embodiment for the WCS Caller ID feature/function is similar to the second preferred embodiment and uses existing signaling messages to coordinate the caller ID information. This preferred embodiment is dependent on a signaling protocol that permits exchange of user to user data. For example, in addition to the normal call setup procedure described above, the originating VAP<sub>O</sub> 103 uses the Q.931 non-call associated signaling procedure to send the calling party information to the destination (termination) VAP<sub>T</sub> 103 before the destination VAP<sub>T</sub> 103 sends the IS-136 Alert-with-Info message. Thus, in this embodiment it is not necessary to use the Calling Address Subaddress IE field.

The WCS Caller ID feature/function invention may provide caller ID information whether the call is from one MS 101 to another MS 101 associated with the same NSP 106 or different NSPs. In the case of different NSPs, the process must include a means of transferring or sharing of the caller ID information, e.g., DN<sub>O</sub> between the various NSPs.

Further, the WCS MS 101 caller ID information may also be provided to a call to a PSTN 125 user as long as a means is provided for entering the caller ID information related to the MS 101 DN<sub>O</sub> into the signaling between the PSTN 125 and the WCS.

Further, the WCS Caller ID feature/function of the present invention may provide for the calling party to be initially coupled with a voice path to, for example, a voice processing unit (VPU) including voice recognition capabilities, which is located in, for example, the VAP 103. As such, the calling party can provide their name or other information which will be provided to the called party, by for example, display on the MS of the called party. The Caller ID feature/function may also allow display on the MS 101 or audio presentation of additional information about the calling or called party, for example their address, building number, company affiliation, etc. for an incoming or active call. Thus, the WCS of the present invention provides a MS 101 user with the ability to know the identity of the calling persons before answering a call and the desk top telephone number, identity, location, etc. of a calling party or a party they are speaking with on an active call, even in the case when the calling party is calling from a WCS MS.

#### **XIV. Screening Calls**

The advent of any time and any place communications provided by the present invention brings with it certain conveniences and certain inconveniences or annoyances.

Ideally, the invention should minimize the inconveniences or annoyances. One inconvenience is that anyone, for example a solicitor, can call a mobile station at anytime, for example in the middle of an important meeting. Therefore, there is a need to provide the

mobile station user in a WCS the ability to block out incoming calls from particular phone numbers, for example, directory numbers.

The call screening feature/function of the instant invention provides just such a means for screening calls in a Wireless Centrex Services (WCS) System. More specifically, the invention allows a mobile station user to specify a list of phone numbers (call screen list) from which incoming calls can be blocked when received. When any one of the phone numbers in the list is calling the MS 101, based on the MS 101 user's previous instructions the WCS system will block the call and either send the call to a message answering service (e.g., a VMS 107), send the call to intelligent peripheral (IP) device (e.g., a VPU 1235 or a DSP) which will provide a pre-recorded announcement message, or just simply drop the call without providing the calling party any announcement or recourse.

The call screen list of phone numbers can be added to or modified using a number of different methods. In one exemplary embodiment, a MS user enters the phone number manually from the MS 101 by keying in each digit of the phone number to be blocked. The MS 101 user dials a feature activation code, for example, \*60#, followed by the phone number that is to receive the call screening treatment, followed by the send button (e.g., \*60#5551212). In response, the WCS system adds the phone number (e.g., 5551212) to the Call Screen list and activates the call screen feature for the phone number entered. This confirms the feature activation.

In another exemplary embodiment of the call screen feature/function of the invention, the call screen list can be added to or modified by pressing a particular key on the MS 101 or by entering the feature code without a phone number, after an active call is disconnected (e.g., after an unwanted incoming call is received). In this case, as an example,

the user can key in the feature code, e.g., \*60#, on the MS 101 and press the send button after a call is hung up. The WCS will retrieve the last active call's related phone number from its database and add it to the call screen list for the MS.

In either of the previous embodiments, a MS user can remove a particular phone number from the Call Screen list or turn off the call screen feature by, for example, pressing a button on the MS 101 or keying into the MS 101 a particular feature code, with or without a phone number to be removed from the Call Screen list. For example, a MS user may key into the MS 100 a Call Screen feature deactivation code, for example \*600#, and the phone number and press the send button. As a result an incoming call to that particular phone number will no longer receive call screen treatment. Alternatively, if the MS 101 user enters a Call Screen feature deactivation code, for example \*600#, without entering along with it a phone number, all call screen treatment will be deactivated for all phone numbers on the Call Screen list.

In yet another embodiment for the call screen feature/function of the invention, the Call Screen list can be added/modified via the internet (World Wide Web) or by calling the WCS CSC representative. A more detailed discussion of the call screen feature/function of the present invention follows.

Referring to Fig. 22, a signal flow for provisioning (activating) the call screen feature/function will now be discussed using the embodiment wherein the MS 101 user enters a feature code and phone number via the MS 101 to activate call screening to block an incoming call. In general, the signal flow for provisioning the call screen feature may follow the methods discussed previously for feature activation. First, the MS 101 user enters the feature activation code and number on the keypad of an MS 101, such as, \*60#

CallScreenDN, where CallScreenDN is the desired directory number (i.e., phone number) to be screened out (i.e., the MS 101 user will not know about the call at the time the incoming call occurs). As a result an IS-136 Origination [\*60# CallScreenDN] 2201 message is sent from the MS 101 to the VAP 103 over the Reverse Digital Control Channel (RDCCH)

5 wherein the called party number field is set to CallScreenDN. The VAP 104 receives the IS-136 Origination [\*60# CallScreenDN] 2201 message and sends an Origination Request [\*60# CallScreenDN] 2202 message to the NSP 106 and starts the origination complete timer TO1. The Origination Request [\*60# CallScreenDN] 2202 is unique in that the Dialed Digit IE (field) which normally contains a DN the MS 101 user wishes to connect to, now  
10 contains the feature code \*60# and the incoming DN to be screened, CallScreenDN.

The NSP 106 receives the Origination Request [\*60# CallScreenDN] 2202 message, performs an analysis of the dialed digits and determines that it is actually a feature request, i.e., a Call Screen request, rather than a telephone call. Next the NSP 106 proceeds to check against the service profile in the WCSN (stored in, for example, the memory 1240) via the

15 MIN of the MS 101 to determine whether the MS 101 is authorized for the Call Screen feature. If the validation is successful the NSP 106 updates the feature activation table for the particular MIN and sends a call origination not acknowledged message, Origination NACK [Cause, Display] 2203 to the VAP 103 which includes proper text information pertaining to the feature, e.g., Call Screen active and the number of the DN that is

20 programmed to be screened. Alternatively, the information contained in this message could be provided via a short message format such as an SMDPP message (similar to an IS-41 message). Next, the VAP 103 sends an IS-136 Reorder/Intercept [Display] 2204 message to the MS 101. This message contains status information regarding the MS 101 user's request

to block a call with the call screen feature/function. For example, the Display information may contain the statement "Call Screen active for CallScreenDN. Similar to the Origination NACK message, the IS-136 Reorder/Intercept message is generated as a result of a telephone call setup is rejected because the numbers dialed by the MS 101 user to activate the call screen were not a recognizable DN for which a telephone call could be established. Thus, the Display field of this message is modified to carry the information to indicate to the MS 101 user the status of their call screen request.

On the other hand, if the NSP 106 determines that the MS 101 is not authorized to use the Call Screen feature, it will send a message Origination NACK [Cause, Display] 2203 message with proper reject information in the cause (e.g., text) field (Call Screen Not Available) to the MS 101. After receiving the Origination Request message 2203 from the VAP 103 to the NSP 106, an Origination NACK message will be sent to the VAP 103 and the VAP 103 will then cancel the timer TO1, release the MS 101, and clear the origination request record.

As previously indicated, if the MS 101 user does not enter a CallScreenDN at the time of initiating the call screen feature, then the WCS will determine the DN for the last active call to which the MS 101 was a party, and activate a call screen for that particular DN. In the case when the DN is not specified and the last active call was an incoming call, the NSP 106 will use the last incoming Caller ID to activate call screening. If the last caller ID is available, the NSP 106 updates the feature activation table for the particular MIN and sends a n Origination NACK [Cause, CallScreenDN] 2203 message with proper text and the CallScreenDN information to inform the MS that calls from the identified CallScreenDn will be screened. Otherwise, if a Caller ID for the previous active call can not be determined



the NSP 106 will notify the VAP and MS 101 that the call screen feature has not been activated.

The call screen feature/function also includes a feature that allows the MS 101 user to determine the disposition of an incoming call which is blocked because the incoming call DN is included in the Call Screen phone number list. The MS 101 user can pre-program the WCS by entering a feature programming code associated with a particular manner for the WCS to handle an incoming call after it is blocked by a call screen designation (i.e., call screen treatment). For example, the MS 101 user can provision the DNs that he would like to screen and the manner in which the call coming from a CallScreenDN may be treated by manually entering particular feature/function codes on the MS 101. The provisioning can also be done through the WCS web site or by calling a Customer Service Center (CSC) representative. Below are illustrations of methods by which the MS 101 user can pre-program the CallScreenDN list by himself/herself using the MS 101. The exemplary provisioning mechanism are as follows.

To provision the Call Screening list, the MS 101 user may dial for example \*60#n#DN, where n is a number between 1 and 3 and signifies the call screen treatment, and DN is the CallScreenDN telephone number, then press the "send" button (e.g. \*60#1#5551212). The correspondence between three possible call screen treatment codes and the treatment to be executed is provided in the table below.

Code	Treatment description
1	Disconnect the call
2	Forward the call to the specified resource (e.g., VMS) or DN
3	Play voice announcement that "called party unavailable"

Table 3

Alternatively a desired CallScreenDN can be dynamically added to the list of

CallScreenDNs after an unwanted call is received. The MS 101 user can press \*60#n and

the "send" button during or immediately after an active call is released. In response, the

WCS will retrieve the calling party number and add it to the call screen list for the MS 101.

If no number is specified to indicate the type of call screen treatment desired (e.g., 1, 2, or 3)

while provisioning (e.g., \*60##DN) a default will be set, for example, the type 1 call screen

treatment will be provided for calls coming from the entered CallScreenDN (DN input with

the feature code \*60). Further, to remove a particular phone number from the list, the MS

101 user may dial for example \*600#DN, where DN is the CallScreenDN telephone number,

and press the "send" button. To remove all the entries from the table, the user may press, for

example, \*600# \*.

Thus, the user of MS 101 can enter a feature programming code, for example, \*601#

with a phone number being screened, CallScreenDN, and press, for example, the send button

to program the incoming call to be dropped without any announcement to the calling party.

This feature programming code would be stored in the WCS and be associated with the

CallScreenDN to which it relates. The signal flow for this added feature programming

would be similar to the signal flow for Call Screen feature activation illustrated in Fig. 22.

If the MS 101 completes such Call Screen feature programming by entering \*601#, when an

incoming call originates from the CallScreenDN phone number, the WCS will drop the blocked call without playing any announcement.

Different feature programming codes, for example, \*602#, \*603#, etc., could be used to program the WCS to dispose of a call screen blocked call by sending it to a VMS 107 or playing an announcement to the calling party indicating that the call is being blocked, etc. Further, the WCS can be programmed so that any one of these call screen treatments (as well as any other not mentioned herein) is used as the default Call Screen blocked call disposition. A detailed discussion of the signal flow for some of the possible disposition of incoming calls blocked by the Call Screen feature follows.

In accordance with one preferred embodiment of the invention, Figure 23 illustrates an exemplary call screen treatment wherein an incoming call originating from a CallScreenDN is terminated without any announcement to the calling party. Although, this embodiment shows an incoming call originating from a DN in the PSTN 125, a similar signal flow would occur for a call originating from a DN in a WCS.

When, for example, a PSTN 125 user dials a WCS subscriber's DN from a telephone outside the WCS, the LDS receives an ISUP IAM [DN] 2301 message from the PSTN 125 to alert the LDS 104 of an incoming call originating from a particular DN. The LDS 104 determines that the called DN is provisioned for an advanced intelligent network termination attempt (AIN TAT), suspends the delivery of the call, and sends an AIN query, TCAP (AIN Termination\_Attempt [DN]) 2302 message, to the NSP 106 for an appropriate routing instruction for contacting the called DN. When the NSP 106 receives the AIN TAT it checks the MS 101 user's service profile feature settings in the WCSD to determine whether the originating telephone number (calling party DN) is a screened telephone number and if

so what, if any, Call Screen treatment has been specified by the MS 101 user. In this case, the MS 101 has activated the Call Screen feature/function for the originating DN and programmed the call screen treatment so that the incoming call should be dropped without playing any announcement to the calling party. Therefore, the NSP 106 then determines that the attempted DN is directed to a MS 101, and that the MS 101 has provisioned the calling party's telephone number as a CallScreenDN with a call screen treatment of dropping the call without an announcement.

In response, the NSP 106 sends a TCAP (AIN Disconnect) 2303 message to the LDS 104. In response the LDS 104 sends the PSTN 125 an ISUP REL 2304 message to release the PSTN 125 without any announcement. Then the LDS 104 sends the TCAP (AIN Close) 2305 message to close the TCAP transaction. Finally, the LDS 104 sends the PSTN 125 a ISUP RLC 2306 message to indicate a release has been completed.

In accordance with a further embodiment of the invention, Figure 24 illustrates an exemplary call screen call treatment scenario in which an incoming blocked call is sent to a resource, such as an answering service, for example VMS 107. In this case, the signal flow is similar to the case where the call screen treatment is set to drop the incoming call without providing the calling party an announcement. However, in this case the LDS 104 is instructed to forward the call from the CallScreenDN (calling party number that is provisioned to be screened) to a resource (e.g., VMS 107) for a proper announcement directed to the calling party.

Once again when, for example, the PSTN 125 user dials the WCS subscriber's DN, the LDS 104 receives an ISUP IAM [DN] 2301 message from the PSTN 125. The LDS 104 finds that the DN is provisioned for AIN TAT, suspends the delivery of the call, and sends

an AIN query message, TCAP (AIN Termination\_Attempt [DN]) 2302 to the NSP 106 for an appropriate routing instruction. Then, the NSP 106 checks the WCSD database to determine whether the calling party telephone number (DN) has been designated by the MS 101 user as a screened number and whether the MS 101 user has set a call screen treatment.

5 In this case, the NSP 106 determines that for the called DN (MS 101) the incoming calling party's telephone number is a CallScreenDN and the call treatment requires the call be sent to a resource. So the NSP 106 instruct the LDS 104 that the incoming call is to be sent to a resource, such as the VMS 107 which will allow the calling party to leave a voice message. Thus, the NSP 106 sends a TCAP (AIN SendToResource) 2401 message to the LDS 104.

10 The LDS 104 sends a TCAP (AIN Close) 2402 message to the NSP 106 to close the TCAP transaction. Finally, the LDS 104 and VMS 107 (Intelligent Peripheral) assume the call processing (Call processing by LDS and VMS 2403) enabling the calling party to leave a message for the MS 101 user.

In accordance with another preferred embodiment of the invention, Figure 25  
15 illustrates a call screen treatment scenario in which a screened call is forwarded to a VAP 103 for playing an announcement to the incoming call indicating, for example, that the call has been screened and will be dropped or that the MS 101 user is not interested in the service or product being offered by the calling party. The NSP 106 designates which VAP 103 within the WCS will provide the announcement to the calling party based on, for  
20 example, VAP 103 availability. Therefore, the VAP 103 designated to play the announcement is not necessarily the VAP 103 with which the MS 101 is presently resident.

When, for example, the PSTN 125 user dials the WCS subscriber's DN, the LDS 104 receives an ISUP IAM [DN] 2501 message from the PSTN 125. The LDS 104 recognizes

that the called DN is set up for an AIN TAT trigger and sends the NSP 106 an AIN TAT query message, TCAP(AIN Termination\_Attempt [DN]) 2502, to get routing information for the incoming call. The NSP 106 checks the WCSDB database to determine whether the calling party's telephone number is a CallScreenDN for the MS 101 being called and

5 whether the MS 101 user has set a particular call screen treatment. Assuming that the NSP 106 determines that the calling party's DN is designated as a CallScreenDN for the MS 101 being called and the MS 101 user has set a call screen treatment for playing an announcement to the calling party, the NSP 106 sends a Play Announcement Request [Call Screen, FDN] 2503 message to one of the available VAPs, specifies the type of  
10 announcement to be played (i.e., Call Screen: Do not call again!) and starts the TPA1 timer. The message will contain the FDN and the announcement option, Call Screen in this case, along with the MIN, VAP ID, and call reference number (e.g., CR=1). However, if the NSP 106 does not find any VAP 103 to connect to the calling party incoming call or the TPA1 timer expires before receiving the Play Announcement Result 2519 message from the VAP  
15 103, it will send a TCAP (AIN Disconnect) message to the LDS 104 and the incoming call will be disconnected without any announcement.

Next, the NSP 106 sends a TCAP (AIN Forward\_Call [FDN]) 2504 message to the LDS 103 directing the LDS 104 to establish a connection between the incoming call from the calling party and the chosen VAP 103 by forwarding the incoming call to the chosen  
20 VAP 103. The LDS 104 then performs a call setup between the selected VAP 103 and the incoming call. First, the LDS 104 sends the VAP 103 a Q.931 Setup [FDN] 2505 message. In response the VAP 103 sends a Q.931 Call Proceeding 2506 message, a Q.931 Alerting 2507 message, and a Q.931 Connect 2509 message to the LDS 104. In the meantime, the

LDS 104 sends an ISUP ACM 2508 message and an ISUP ANM 2510 message to the PSTN 125. When the incoming call has been properly connected with the selected VAP 103, the LDS sends a Q.931 Connect ACK 2511 acknowledgement message to the VAP 103 and a TCAP (AIN Close) 2512 message to the NSP 106.

5        Once the incoming call is connected with the VAP 103, the VAP 103 plays the announcement (for example, a default announcement, a user defined announcement using voice synthesis, or a user defined announcement that is a recorded message created by the MS 101 user) at step 2513. The VAP 103 uses, for example, a DSP to provide the announcement or may utilize the VPU 1235 in the NSP 106 to generate the announcement.

10    After the announcement has been played, the VAP 103 initiates a disconnect process with the LDS 104 and the LDS 104 initiates a release process with the PSTN 125, releasing the VAP 103 and PSTN 125 from the active voice traffic channel. This process is initiated by the VAP 103 sending the LDS 104 a Q.931 Disconnect 2514 message instructing the LDS 104 to disconnect the active call between the VAP 103 and the PSTN 125. The LDS 104  
15    releases the active call connection with the VAP 103 by sending a Q.931 Release 2517 message and releases the active call connection with the PSTN 125 by sending a ISUP REL 2516 message. The PSTN 125 notifies the LDS 104 that the call has been disconnected by sending an ISUP RLC Complete 2518 message to the LDS 104. The VAP 103 notifies the LDS 104 that the call has been disconnected by sending a Q.931 Release Complete 2517

20    message to the LDS 104. Finally, the VAP 103 sends a Play Announcement Result [Success] 2519 message to the NSP 106, indicating that the announcement was played successfully for the incoming call, and cancels timer TPA1. The Play Announcement Result message includes a VAP ID, FDN, Call Reference Number, Result, and Cause fields. As

previously indicated, if the TPA1 timer expires before receiving Play Announcement Result 2519 message is received from the VAP 103, it will send a TCAP (AIN Disconnect) message to the LDS 104 if not sent already, and the call will be disconnected without any announcement.

5    **XV.    Call Forwarding**

**A.      Unconditional Call Forwarding**

          A user of the MS 101 may not always have the MS 101 with him or her. It may be useful in such a situation to allow for incoming calls to the MS 101 to be forwarded to another predetermined DN or DNs. This DN to which calls are forwarded is referred to  
10    herein as the FwdDN. Various types of call forwarding are available in the WCS 140. For example, calls may be forwarded unconditionally, such that a call to a DN that would otherwise be destined for the MS 101 associated with the DN would be forwarded instead to a predetermined FwdDN. This unconditional call forwarding feature may alert both the MS 101 and the communication device at the FwdDN, or only the communication device at the  
15    FwdDN such that the MS 101 is not alerted at all.

          To activate this “unconditional call forwarding” feature, the MS 101 user may dial a feature activation code such as \*90#[FwdDN], followed by the SEND button on the MS 101. In this example, “\*90” indicates the unconditional call forwarding feature. The phrase FwdDN in the brackets “[ ]” represents the intended DN to which a call should be forwarded  
20    (the brackets themselves are not actually dialed in this example). To deactivate the unconditional call forwarding feature, the MS 101 user may enter a sequence such as \*900 (or other appropriate sequence) followed by the send button.



Fig. 26 is an exemplary flow chart of how the unconditional call forwarding feature may work. A call may be made directed to the MS 101 subscriber's DN (step 2601). A determination is made whether the unconditional call forwarding feature has been activated for the MS 101 (step 2602). If so, then FwdDN is determined (step 2603) and the call is automatically forwarded to FwdDN (step 2604). If the unconditional call forwarding feature has not been activated for the MS 101, then the call is routed to the MS 101 and/or further processing is performed on the call.

An exemplary embodiment of how the above steps for unconditional call forwarding may be performed is now described with reference to Fig. 27. Once the unconditional call forwarding feature has been activated for an MS 101, a PSTN 125 or WCS 140 user may dial the called WCS 140 subscriber's DN. Responsive to the LDS 104 receiving the incoming call for the WCS 140 subscriber at DN (the call is assumed in this example to be initiated from the PSTN 125) (step 2701), a TCAP AIN TAT message may be sent from the LDS 104 to the NSP 106 (step 2703). Upon receipt of the TCAP AIN TAT message, the NSP 106 may check the feature activation table for the MS 101 and may determine that the MS 101 has activated the unconditional call forwarding feature. The NSP 106 may further check the subscriber profile and find that the unconditional call forwarding feature is active for the called MS 101. If the unconditional call forwarding feature is active, the NSP 106 may retrieve the call forwarding number (FwdDN). The NSP 106 may immediately use the FwdDN as the forwarding number and may send a TCAP (AIN Forward\_Call) message to the LDS 104 (step 2705). The LDS 104 may then assume the call processing and forward the call to FwdDN (step 2707).

## B. Busy Call Forwarding

Call forwarding may alternatively or additionally be configured to forward a call in response to a selected number of rings occurring at the called MS 101 and/or the passage of a certain amount of time. For example, a call may be forwarded to FwdDN after three seconds have passed (e.g., after three seconds of alerting time at the MS 101). As another example, the call may be forwarded after eight seconds have passed.

To activate this “programmable ring call forwarding” feature, the MS 101 user may dial a feature activation code such as \*91\*4#[FwdDN], followed by the SEND button on the MS 101. Such a command may indicate that calls should be forwarded to FwdDN after four seconds. In this example, “\*91” indicates the programmable ring call forwarding feature, and the “4” after the star sign indicates either the number of seconds or the number of rings after which a call should be forwarded, depending upon how the WCS 140 is configured. This number may be in the range of, e.g., 0 to 30 seconds, or 0 to 10 rings, changeable through the WCS 140 OA&M interface. To deactivate the programmable ring call forwarding feature, the MS 101 user may enter a sequence such as \*910 followed by the send button. If no amount of time is specified by the user (e.g., by dialing \*91#[FwdDN]) or the amount of time entered is out of range, then a default amount of time, such as four seconds, may be used.

Fig. 32 is an exemplary flow chart of how the programmable ring call forwarding feature may work. Referring to the same call as in Figs. 26, 28, and 30, and if the call has not yet been forwarded to FwdDN, a determination is made whether the programmable ring call forwarding feature has been activated for the MS 101 (step 3201). If this feature has not been activated, then the MS 101 is alerted to the call (e.g. by ringing the MS 101) and the

call routed to the MS 101 upon answering (step 3202) and/or further processing is performed on the call. If the programmable ring call forwarding feature has been activated for the MS 101, then a time-out period is determined (step 3203). The time-out period may either be predetermined by the subscriber or set to a default value. The MS 101 is also  
5 alerted to the existence of the call, and a timer for timing the time-out period is started (step 3204). It is determined whether the call has been answered at the MS 101 before the timer has finished (step 3205), and if so, then the call is routed to the MS (step 3206). If the call has not been answered within the allotted time, then FwdDN is determined (3207) and the call is forwarded to FwdDN (step 3208).

10 An exemplary embodiment of how the above steps for programmable ring call forwarding may be performed is now described with reference to Fig. 33. Once the programmable ring call forwarding feature has been activated for the MS 101, an incoming call to the subscriber's DN is automatically forwarded to the FwdDN after the selected amount of time or number of rings. A PSTN 125 or WCS 140 user may dial the WCS 140  
15 subscriber's DN (i.e., the subscriber who has activated the programmable ring call forwarding feature). The LDS 104 may receive the ISUP IAM message associated with the call (the call is assumed in this example to be initiated from the PSTN 125) (step 3301). In the present embodiment, the LDS 104 may determine that the dialed DN is provisioned for AIN Termination Attempt Trigger (TAT). Responsive to such a determination, the LDS 104  
20 may suspend delivery of the call and may send an AIN query message to the NSP 106 (step 3303) for an appropriate routing instruction.

When the NSP 106 receives the AIN TAT message, the NSP 106 may find that the subscriber's MS 101 is active and idle in its serving area. The NSP 106 may then page the

MS 101 through the VAP 103 (steps 3305, 3307) using IS-136 paging procedures, and may also start a TT6 timer 3308. As part of the page request message in step 3305, the NSP 106 may send the MSID that the VAP 103 will use to complete the incoming call setup procedure. When the MS 101 responds to the page (steps 3309, 3311), the VAP 103 may forward the page response in the form of a Page Response message, which includes the Forward Directory Number (FDN), to the NSP 106 (step 3313). The VAP 103 may also start an event timer TT5 3314 at this time to prevent permanent holding of RF and ISDN B-channel resources.

If the TT6 timer 3308 expires and the NSP 106 has not received the Page Response message in step 3313, the NSP 106 may authorize call termination to the DN. On the other hand, if the NSP 106 receives the Page Response message before the TT6 timer 3308 expires, the NSP 106 may cancel the TT6 timer 3308 and determine that the current VAP 103 has the resources to serve the incoming call. The NSP 106 may also check whether the programmable ring call forwarding feature is active for the particular MS 101. The NSP 106 gets the TFPR value, which signifies the time period for which the MS 101 should ring before the call should be forwarded, from the subscriber profile. At this point, the NSP 106 may direct (using a TCAP Conversation package) the LDS 104 to forward the call to the FDN of the VAP 103 serving the MS 101 (step 3315). The TCAP Conversation package may include the T(NoAnswer) timer value in the TCAP AIN message to indicate the length of the ringing after which the call shall be forwarded. The message may be in the form of TCAP (AIN Forward\_Call[FDN], NEL[O\_No\_Answer], T(NoAnswer)), where T(NoAnswer) is set to be the time after which the call should be forwarded. For example,

where the user activated the programmable ring call forwarding feature as \*91\*5#[FwdDN], then T(NoAnswer) would be set to five seconds.

The LDS 104 may start the T(NoAnswer) timer 3318 for the FDN and send a Q.931 Setup message to the VAP 103 (step 3317). Upon receipt of the Q.931 Setup message, the VAP 103 may cancel the TT5 timer 3314, initiate DTC designation to the MS 101 (step 3319), start a TT2 timer 3320, and send a Q.931 Call Proceeding message to the LDS 104 (step 3321).

At this point, the MS 101 may tune to the traffic channel. When the VAP 103 detects that the MS 101 is on the traffic channel via a DVCC status change (step 3323), the MS 101 may cut through the ISDN/B-Channel and initiate the Alerting procedures to both the call legs (i.e., in both the LDS 104 and MS 101 directions). The VAP 103 may send an IS-136 Alert-With-Info message to the MS 101 (step 3325) and wait for an IS-136 Mobile ACK message from the MS 101 (step 3351). When the VAP 103 receives the Mobile ACK message, the VAP 103 may start a TT4 timer 3326 and send a Q.931 Alerting message to the LDS 104 (step 3327). Upon receipt of the Q.931 Alerting message, the LDS 104 may send an ISUP ACM message to the switch in the PSTN 125 (step 3329) and generate a ring-back tone towards the calling party (step 3331).

When the T(NoAnswer) timer 3318 expires on the LDS 104, the LDS 104 may send an event notification to the NSP 106 (step 3333) in the form of an AIN O\_No\_Answer trigger. Upon receipt of the AIN O\_No\_Answer trigger, the NSP 106 may check if the programmable ring call forwarding feature is active for the MS 101. If the feature is active, the NSP 106 may get the call forwarding number from the subscriber profile and direct the LDS 104 to forward the call to the call forwarding number (FwdDN) (step 3335) using a

TCAP (AIN Forward\_Call[FwdDN]) message. The LDS 104 may then release the ISDN-B channel setup by sending a Q.931 Disconnect message to the VAP 103 (step 3337).

In response to the Q.931 Disconnect Message, the VAP 103 may send a Q.931 Release message to the LDS 104 (step 3339). In response, the LDS 104 may send a Q.931 Release Complete message to the VAP 103 (step 3341). The VAP 103 may release the RF resources by sending an IS-136 Release message to the MS 101 (step 3343), and may send a Termination Result [fail] message to the NSP 106 (step 3345). The MS 101 may send an IS-136 Mobile ACK message to the VAP 103 (step 3347). At this point, call processing may be assumed by the LDS 104 and the call will be forwarded to FwdDN (step 3349).

If the call is answered at the MS 101 before the T(NoAnswer) timer 3318 expires, or if the programmable ring call forwarding feature is not activated for the MS 101, then the call will be processed normally without the call being forwarded (unless another call forwarding feature as described herein is activated for the MS 101).

### C. Time-of-Day Call Forwarding

Call forwarding may alternatively or additionally be configured to forward a call depending upon whether the subscriber's MS 101 is busy (i.e., currently handling a call). For example, incoming calls to the subscriber's DN may be routed to the subscriber's MS 101 when it is not busy, and forwarded to FwdDN when the MS 101 is busy.

To activate this "busy call forwarding" feature, the MS 101 user may dial a feature activation code such as \*93#[FwdDN], followed by the SEND button on the MS 101. In this example, "\*93" indicates the busy call forwarding feature. To deactivate the busy call forwarding feature, the MS 101 user may dial, e.g., \*930 and then the SEND button.

Fig. 28 is an exemplary flow chart of how the busy call forwarding feature may work. Referring to the same call as in Fig. 26, and if the call has not yet been forwarded to FwdDN, a determination is made whether the busy call forwarding feature has been activated for the MS 101 (step 2801). If so, it is then determined whether the MS 101 is busy (step 2802). If the busy call forwarding feature is active and the MS 101 is busy, then FwdDN is determined (step 2803) and the call is automatically forwarded to FwdDN (step 2804). If the busy call forwarding feature has not been activated for the MS 101 and/or the MS is not busy, then the call is routed to the MS 101 and/or further processing is performed on the call.

An exemplary embodiment of how the above steps for busy call forwarding may be performed is now described with reference to Fig. 29. Once the busy call forwarding feature has been activated for the MS 101, an incoming call will be automatically forwarded to FwdDN if the MS 101 is busy. When the LDS 104 receives an incoming call for the WCS 140 user (DN) (step 2901), the LDS 104 may send a TCAP AIN TAT message to the NSP 106 (step 2903). Upon receipt of the TCAP AIN TAT message, the NSP 106 may check the feature activation table for the MS 101 and determine whether the MS 101 has activated the busy call forwarding feature. The NSP 106 may also determine whether the MS 101 is currently busy. If the MS 101 is currently busy (e.g., busy due to call 2901) and the busy call forwarding feature is activated for the MS 101, the NSP 106 may use the FwdDN as the forwarding number and send a TCAP (AIN Forward\_Call) message to the LDS 104 (step 2905). The LDS 104 may then assume call processing and forward the call to FwdDN (step 2907). If the MS 101 is not currently busy, or if the busy call forwarding feature is not

activated for the MS 101, then the call will be processed normally without being forwarded (unless another call forwarding feature as described herein is activated for the MS 101).

**D. Programmable Ring Call Forwarding**

5 Call forwarding may alternatively or additionally be configured to forward a call depending upon the time of day, day of week, and/or date. For example, a call may be forwarded to FwdDN on weekends but not on weekdays. As another example, incoming calls to a particular subscriber's DN may be forwarded to a first FwdDN between begin time 9:00 a.m. and end time 6:00 p.m., to a second different FwdDN between begin time 6:00  
10 p.m. and end time 8:00 p.m., and not forwarded at all other times (i.e., routed to subscriber's normal MS 101 at all other times).

To activate this "time-of-day call forwarding" feature, the MS 101 user may dial a feature activation code such as \*92\*[BeginTime]\*[EndTime]#[FwdDN], followed by the SEND button on the MS 101. In this example, "\*92" indicates the time of day call  
15 forwarding feature. "[BeginTime]" indicates the selected begin time, and "[EndTime]" indicates the selected end time. The begin and end times may be entered in any format. For example, the format may be a 24-hour military time format, such that if the chosen begin time is 8:30 a.m., and the chosen end time is 6:00 p.m., then BeginTime would be entered by the subscriber as 0830 and EndTime would be entered as 1800. To deactivate the time-of-  
20 day call forwarding feature, the MS 101 user may dial, e.g., \*920 and then the SEND button.

Fig. 30 is an exemplary flow chart of how the time-of-day call forwarding feature may work. Referring to the same call as in Figs. 26 and 28, and if the call has not yet been forwarded to FwdDN, a determination is made whether the time-of-day call forwarding



feature has been activated for the MS 101 (step 3001). If so, it is then determined whether the current time is between predetermined begin and end times (step 3002). If the time-of-day call forwarding feature is active and the current time is between the begin and end times, then FwdDN is determined (step 3003) and the call is automatically forwarded to FwdDN (step 3004). If the time-of-day call forwarding feature has not been activated for the MS 101 and/or the current time is not between the begin and end times, then the call is routed to the MS 101 and/or further processing is performed on the call.

An exemplary embodiment of how the above steps for time-of-day call forwarding may be performed is now described with reference to Fig. 31. Once the time-of-day call forwarding feature has been activated for the MS 101, an incoming call to the subscriber's DN is automatically forwarded to FwdDN depending upon the time, date, and/or day. When the LDS 104 receives an incoming call for the WCS 140 user (DN) (step 3103), the LDS 104 may send a TCAP AIN TAT message to the NSP 106 (step 3105). Upon receipt of the TCAP AIN TAT message, the NSP 106 may check the feature activation table for the MS 101 and determine that the MS 101 has activated the time-of-day call forwarding feature. The NSP 106 may check a clock (such as the internal clock of the NSP 106) and compare the clock with the user-programmed time period(s). For example, the NSP 106 may check whether the current time as indicated by the clock is between the begin time and the end time of each user-programmed time period.

If the clock is within one of the user-programmed time periods, the NSP 106 may use FwdDN as the forwarding number and send a TCAP (AIN Forward\_Call) message to the LDS 104 (step 3107). The LDS 104 may then assume call processing and the call is forwarded to FwdDN (step 3109). If the current time as indicated by the clock is not within

one of the user-programmed time periods, or if the time-of-day feature is not activated for the MS 101, then the NSP 106 may treat the incoming call as a normal incoming call, such that the incoming call will not be forwarded (unless another call forwarding feature as described herein is activated for the MS 101).

5 Any or all of the above-described features may be activated, deactivated, and/or otherwise configured in any combination or subcombination desired for a particular MS 101. For example, call forwarding for a particular MS 101 may be configured so as to unconditionally forward calls on weekends, and to forward calls only after six seconds on weekdays. Such activation, deactivation, and/or other configuration of the features may be  
10 controlled by the user via the MS 101, via a telephone call to the service provider (e.g., a customer service representative), via the Internet, and/or via an intranet or other private or public network coupled to the WCS 140. Alternatively, the WCS 140 may be configured such that only one call forwarding feature at a time may be activated for a particular MS 101. In such an embodiment, if a call forwarding feature is activated while an existing call  
15 forwarding feature is already activated for the MS 101, the new call forwarding feature may replace the existing call forwarding feature.

Fig. 34 illustrates a display of an exemplary interactive Internet web page 3400 for activating, deactivating, and/or configuring features described herein. The web page 3400 may allow a user to define one or more FwdDNs to which calls should be forwarded  
20 depending upon one or more conditions. An advantage to using an Internet web page to activate, deactivate, and/or configure features is that the user may see the entire configuration on one display. This may be important if the user has selected a particularly complex feature configuration. When the Internet is used to configure call forwarding

features or other features, a server that runs the web page 3400 may be coupled to the WCS 140.

The web page 3400 shown in Fig. 34 includes one or more forwarded number text boxes 3401 within which a user can enter selected FwdDNs, check boxes 3402 for selecting whether a call should be unconditionally forwarded to a particular FwdDN, text boxes 3403 for selecting how many rings should occur at the MS 101 (and/or how much time to wait) before forwarding a call for a particular FwdDN, check boxes 3404 for selecting whether a call should be forwarded to a particular FwdDN when the MS 101 is busy, and text boxes 3405 for selecting time ranges within which a call should be forwarded to a particular FwdDN. Of course, the web page 3400 may include any type of text box, check box, pull-down menu, scroll box, etc., any of which may be used interchangeably as desired with any of the text boxes and/or check boxes 3401-3405. What is important is that the web page 3400 allows the user to configure the call forwarding features and/or other calling features for his/her MS 101.

For example, as shown in Fig. 34, call forwarding for an MS 101 having a DN 123-123-4567 may be configured on the web page 3400 to unconditionally forward all incoming calls, but only on weekends, to FwdDN 123-456-7890. Call forwarding for the same MS 101 may further be configured to forward incoming calls after three rings at the MS 101, but only on Mondays between 8:00 a.m. and 6:00 p.m., to FwdDN 234-567-8901. Call forwarding for the same MS 101 may further be configured to forward incoming calls after two rings at the MS 101 or when the MS 101 is busy, but only on October 26, 1999, to FwdDN 345-678-9012. Thus, a particular MS 101 may have multiple call forwarding and/or other features simultaneously configured. If there is a conflict in features (e.g.,

unconditional call forwarding at all times in combination with call forwarding only when busy at all times), then the web page 3400 may indicate to the user that such a conflict exists and that the features should be re-configured accordingly.

5    **XVI. Call Waiting**

Figure 35 provides an exemplary call flow diagram for implementing the call waiting feature according to an illustrative embodiment of the present invention.

For purposes of this discussion, it will be assumed that there exists an active call 3502 between a mobile station MS 101A and a party coupled to the PSTN 125. The call 3502 in progress is referred to by the VAP 103A and the NSP 106 as having a call reference value, CR=1, and a B Channel ID (Ch ID=B1). When a second call originating from within the PSTN 125 is made to a DN of a party in a WCS system, such as a party using MS 101A, an ISUP IAM [DN] message 3504 is received by the LDS 104. The LDS 104 processes the ISUP IAM message 3504 and discovers that the called party's DN is provisioned for AIN call treatment. Then, the LDS 104 sends an AIN query message, TCAP (AIN Termination Attempt [DN]) message 3506, to the NSP 106 for an appropriate routing instruction. Responsive to the AIN query message and knowing that the MS 101A is involved in an active call 3502, the NSP 106 determines if the MS 101A subscribes to the call waiting feature by checking the WCSD (Wireless Centrex System Database) and determines if the call waiting feature is currently available and has been activated by the subscriber.

If the MS 101A does not subscribe to the call waiting feature or the feature is not presently available such as by being deactivated, the NSP 106 sends a TCAP message (not shown) to the LDS 104 with Authorize Term (authorize termination) message to the original

DN. The call waiting feature may not be available due to manual or automatic deactivation.

According to one embodiment of the invention, the user may manually deactivate the call waiting feature when they do not want to be interrupted by, for example, pressing a special key code on their handset prior to making a call. Also, the call waiting feature may be

5 automatically deactivated in a number of instances, such as: 1) when the MS is already engaged in a conference call; 2) when the MS is already engaged in another call waiting; 3) when the MS has received an automatic callback call with another call on hold; and 4) as predetermined by the subscriber including based on the physical location of the MS, the time of day, or the other party on the original call. When the LDS 104 receives the Authorize  
10 Term message, the incoming call may be connected to the DN (desktop phone) or coupled to the VMS 107 for further handling.

If the MS 101A subscribes to the call waiting feature and it is presently available or active, then the NSP 106 sends an AIN Forward Call message in a TCAP conversation package 3508 to the LDS 104. The TCAP conversation package 3508 directs the LDS 104  
15 to forward the call to the FDN (forward directory number). The FDN is the DN in the VAP 103A that is used to deliver the call to the MS 101A. The LDS 104 then sends a Q.931 Setup message 3510 including the FDN, a call reference value (CR=2) and a second B Channel ID (Ch ID = B2) to the VAP 103A and starts a No Answer Timer (T(NoAnswer)). The VAP 103A responds to the Q.931 Setup message 3510 by sending a Q.931 Call  
20 Proceeding message 3512.

Next, the VAP 103A sends the NSP 106 a Call Waiting Proceeding message 3520 including the MSID and FDN and starts the TCW1 timer (first call waiting timer). In response, the NSP 106 sends a Play Voice Prompt message 3522 including a call waiting

tone to the VAP 103A and starts the TCW2 timer (second call waiting timer). Upon receipt of the Play Voice Prompt message 3522, the VAP 103A cancels the TCW1 timer and generates and plays the call waiting (CW) tone 3524 to the user of MS 101A. The tone may be generated and played at a preset interval for a preset duration, such as every five seconds for one minute.

While the CW tone 3524 is being generated, the VAP 103A sends a Q.931 alerting message 3514 to the LDS 104. The LDS 104 responsive to the Q.931 alerting message 3514 sends an ISUP ACM message 3516 to the switch in PSTN 125. In the meantime, the LDS 104 sends a ring back tone 3518 to the PSTN 125 caller.

The user of MS 101A may choose to answer the incoming call by sending a message to the VAP 103A before T(NoAnswer) expires. According to an illustrative embodiment of the invention, the user can answer the incoming call and place the existing call on hold by pressing the "send" button, which in turn sends an IS-136 Flash with Info message 3526 to the VAP 103A. In response, the VAP 103A sends a Feature Request [Flash with Info] message 3528 to the NSP 106 and starts the TCW3 (third call waiting timer). Also, the VAP 103A sends an IS-136 Flash with Info ACK message 3530 to the MS 101A acknowledging receipt of the Flash with Info message 3526. When the NSP 106 receives the Feature Request [Flash with Info] message 3528, it cancels the TCW2 timer and sends a Feature Request ACK [Hold and Answer Call Waiting] message 3532 to the VAP 103A and starts the TCW4 timer (fourth call waiting timer). Next, the VAP 103A cancels the TCW3 timer and initiates the Q.932 call hold procedure for the existing call (CR=1) by sending a Q.932 Hold [CR=1] message 3534 to the LDS 104. The LDS then responds by sending a Q.932

Hold ACK [CR=1] message 3536 to the VAP 103A to acknowledge that the current call is held, Call Held (CR=1) 3538.

The VAP 103A sends a Q.931 Connect [CR=2] message 3540 to LDS 104 to cause initiate connection of the incoming call (CR=2). The LDS 104 then cancels the

5 T(NoAnswer) timer and sends an ISUP ANM message 3542 to PSTN 125 switch to cut through the voice path 3548. After the LDS 104 sends an ISDN Q.931 Connect ACK message 3544 to the VAP 103A for the incoming call, it sends a TCAP (AIN Close) message 3550 to the NSP 106. Meanwhile, the VAP 103A sends a Hold & Answer Call Waiting Result [success] message 3546 to the NSP 106 indicating that the call waiting  
10 process has been successful. Then, the NSP 106 cancels the TCW4 timer and the voice path 3548 is established for the incoming call while the original call (CR=1) is placed on hold. The voice path 3548 has a call reference value of CR=2 and a B Channel ID, Ch ID = B2.

It should be understood that the MS user could proactively handle the second call as described in other portions of this application in conjunction with the call waiting feature.

15 Also, the user may switch back and forth between the second call (CR=2) and the original call (CR=1) in a number of ways. For example, the user may press the "send" button and reinitiate the process described in FIG. 35 beginning with sending IS-136 Flash with Info message 3526 as set forth above.

Figure 36 provides an illustrative flow diagram for implementation of the call  
20 waiting feature according another embodiment to the present invention in which much of the intelligence is distributed to the VAP 103A rather than in the NSP 106.

In step S361, an existing call (CR=1) between a PSTN user and MS 101A is in progress and a new call arrives for the MS 101A. Next, in step S362, the NSP 106

determines whether the call waiting feature is available for the MS 101A. If the NSP 106 determines that call waiting is not available, then the NSP 106 informs the LDS 104 that the MS 101A is busy in step S363 and a busy signal can be returned to the PSTN user, or another call routing procedure may be implemented such as routing the call for further  
5 handling as described elsewhere in the application, such as to the desktop phone associated with the MS 101A or the VMS 107. Alternatively, if the NSP 106 validates that call waiting is available, then, in step S364, the NSP 106 instructs the VAP 103A to initiate the call waiting procedure and the LDS 104 to forward the call to the VAP 103A.

In step S365, it is determined whether the call (CR=2) has been established  
10 successfully to the VAP 103A and the MS 101A. If the call has not been established successfully in step S365, then, in step S366, the VAP 103A cancels the call waiting procedure and informs the NSP 106 of the cancellation, which causes the NSP 106 to initiate the call release procedure. If the call has been established successfully, the LDS generates a ringback tone to the calling party and the VAP 103A sends a call waiting signal to the MS  
15 101A and waits for a response thereto in step S367.

The VAP 103A waits a predetermined period of time for a response from the MS 101A user in step S368. If the VAP 103A timer expires in step S368, the VAP 103A informs the NSP 106 to release the call (CR=2) in step S369 similarly to step S366. However, if the MS 101A responds within the time period, the VAP 103A initiates the call  
20 hold procedure in which the LDS 104 places the original call (CR=1) on hold and the incoming call (CR=2) is established between the PSTN user and the MS 101A in step S370. Also, in step S360, the VAP 103A informs the NSP 106 of the successful call waiting result.



In step S371, the MS 101A user may toggle back and forth between the new call (CR=2) and the original call (CR=1) putting one on hold while communicating in the other.

## XVII. Distinctive Ringing

5           The distinctive ringing feature allows a subscriber to be alerted by a distinctive indication, e.g., a ring, of an incoming call originated from a communications unit assigned a specific directory number (DN). A subscriber can provision one or more DNs that cause a distinctive ring to occur when a communications unit assigned a provisioned DN initiates a call to the subscriber.

10           There are several ways a subscriber can provision the distinctive ringing DN list. For example, the user may access the Internet or a web-based interface such as a WCS web site and input and update the DN list. Also, the subscriber may contact a customer care center representative by phone and verbally communicate the numbers through any type of communications unit (e.g., cell phone, landline phone, wireless palm top computer phone,  
15 etc.). Alternatively, a user may be directed through an automated phone menu to input the numbers by use of a communications unit keypad or voice recognition system.

          According to one embodiment, the user may provision the distinctive ringing services through the WCS system. In this regard, the subscriber may activate the feature by entering a feature activation code followed by a DN (e.g., \*70#5555151) into the keypad of  
20 MS 101A and then pressing the "send" button. Actuation of the "send" button sends the feature activation message to the WCS system (e.g., NSP 106). The WCS system then may acknowledge activation of the feature and phone number by, for example, returning a short message to the MS 101A. In addition, a message indicating that a call origination request

has been rejected may contain feature activation/deactivation status information to be displayed to the user.

In a further modification, a subscriber can select a specific distinctive ring for each DN from a plurality of available rings (e.g., 5 ring tones). For example, a subscriber may identify personal calls by one distinctive ring type (e.g., ring type 1), business calls by another distinctive ring type (ring type 2), and a very important call by yet another ring type (ring type 3). Also, the subscriber may define a distinctive ring for all calls originating from parties who have blocked their number pursuant to call blocking. Thus, the subscriber might send the feature activation code followed by the ring type and the DN (e.g., \*70#2#5555151) to the WCS system. When the subscriber fails to enter a ring type, a default distinctive ring (e.g., ring type 1) can be assigned to the DN.

To remove a phone number from the DN list, the subscriber, in addition to the methods note above, may enter a feature deactivation code followed by the DN (e.g., \*700#DN) and press the "send" button. Also, the subscriber may deactivate the distinctive ringing for all numbers by entering a feature deactivation code (e.g., \*700#\*) and the "send" button on the MS 101A. A more detailed discussion of feature activation and deactivation is provided at other places in the instant description, for example at section IX.

According to an illustrative embodiment of the invention, the DN list may be stored in a memory in the NSP 106 or a memory location accessible to the NSP 106. The DN list may include any amount of numbers depending on the capacity of the memory employed. In one embodiment, up to thirty numbers may be preset for distinctive ringing. In this embodiment, if a subscriber attempts to provision a thirty-first number, the system may reject the provision or alternatively overwrite the first number provisioned (a first-in-first-

out (FIFO) scheme). Also, the size of the phone number in the list can be set according to the capacity of the memory. In an illustrative embodiment, the size of the numbers in the list may range from four to fifteen digits. Also, it should be understood that a DN of a calling party outside or inside the WCS environment may be defined to have a distinctive  
5 ring.

Figure 37 provides an exemplary call flow diagram for implementing the distinctive ringing feature according to an illustrative embodiment of the present invention. While the IS-136 standard is used to illustrate one implementation of the present invention, it should be understood that the present invention is applicable to other cellular or PCS systems.

10 When a user of the PSTN 125 dials the DN of a WCS subscriber, the LDS 104 receives an ISUP IAM message 3702 from the PSTN 125. If the dialed DN is provisioned for AIN Termination Attempt Trigger (TAT), the LDS 104 suspends the delivery of the call and sends an AIN query message 3704 (i.e., TCAP (AIN Termination\_Attempt [DN])) to the NSP 106 for an appropriate routing instruction.

15 The NSP 106 upon receipt of the AIN query message 3704 determines if the DN of the calling party is a number for which distinctive ringing is desired (i.e., a DR\_DN). For example, the NSP compares the DN of the calling party with each DR\_DN in the distinctive ringing list for the MS 101A (e.g., in the wireless centrex system database (WCSD) entry for the MIN of MS 101A). If the DN of the calling party matches a DR\_DN in the distinctive  
20 ringing list, the NSP 106 retrieves the information regarding the distinctive ring from its storage location and specifies in the "signal" portion of a page request message 3706 that a distinctive ring should be provided for the MS 101A. Also, if multiple distinctive ring tones are available, the NSP 106 indicates the specific distinctive ring tone for reception by the

MS 101A in the "signal" portion of the page request message 3706. Assuming the subscriber's MS 101A is active in the service area of the NSP 106, the NSP 106 sends the page request message 3706 (i.e., Page Request [MSID, signal]) to the VAP 103A serving MS 101A.

5           When the NSP sends the page request message 3706 to the VAP 103A, a timer TDR1 starts. Responsive to the page request message 3706, the VAP 103A sends an IS-136 Page message 3708 to the MS 101A. If the MS 101A does not respond to the IS-136 page message 3708 before timer TDR1 expires, then the call is terminated in another manner by transfer to the VMS, user's desktop phone or otherwise as described herein. Otherwise, the  
10   MS 101A responds to the IS-136 page message 3708 via an IS-136 page response message 3710 sent to the VAP 103A. In turn, the VAP 103A sends a page response message 3712 (i.e., Page Response [FDN]) to the NSP 106.

          After receiving the page response message 3712, the NSP 106 directs LDS 104 to forward the call to the Forward Directory Number (FDN) of the VAP 103A serving the MS  
15   101A in a TCAP conversation package 3714, TCAP (AIN Forward\_Call [FDN], NEL [O\_No\_Answer]). The NSP 106 also indicates its interest in event (O\_No\_Answer for FDN) by sending next event list NEL [O\_No\_Answer]) information to the LDS 104 in a request component that accompanies the routing component in the TCAP conversation package 3714. The LDS 104 then starts a No Answer Timer TT10 for the FDN. Also, LDS  
20   104 sends a Q.931 setup [FDN] message 3716 to the VAP 103A.

          The VAP 103A then sends an IS-136 digital traffic channel (DTC) designation message 3718 to the MS 101A. Also, VAP 103A sends a Q.931 call proceeding message 3720 to the LDS 104. The MS 101A then tunes to the digital traffic channel and responds to

the VAP 103A with MS on DTC message 3722. The VAP 103A detects the MS 101A on the appropriate traffic channel. Next, the VAP 103A alerts MS 101A with an alert-with-info [signal] message 3724. The alert-with-info message 3724 includes the appropriate distinctive ringing tone, if any, for play to the subscriber of the MS 101A. The VAP 103A then sends a Q.931 alerting message 3726 to LDS 104. The MS 101A acknowledges receipt of the alert-with-info message 3724 by sending the VAP 103A an IS-136 mobile acknowledge (Mobile ACK) message 3728. Upon receiving the Q.931 alerting message 3726, the LDS 104 sends an ISUP ACM message 3730 to the switch in PSTN 125. Meanwhile, the LDS 104 sends a ringback tone 3732 to the calling party from the PSTN 125.

When the MS 101A answers (before TT10 expires), it sends an IS-136 connect message 3734 to the VAP 103A. The VAP 103A then sends Q.931 connect message 3736 to the LDS 104 in response to the IS-136 connect message 3734 from MS 101A. The LDS 104 then cancels timer TT10 and sends ISUP ANM message 3738 to the PSTN 125 switch and cuts through the voice path 3746. After the LDS 104 sends a Q.931 connect ACK message 3740 to the VAP 103A, it then sends TCAP (Completed) message 3742 to the NSP 106 to complete the TCAP transaction. Responsive to Q.931 connect ACK message 3740, the VAP 103A sends termination result [Success] message 3744 to the NSP 106 for billing and other OAM&P purposes. At this point, voice path 3746 has been established and the call proceeds between the calling party from the PSTN 125 and the MS 101A subscriber.

#### **XVIII. Returning Calls**

Technologies that facilitate wireless communication are emerging at an ever-faster rate. Such technologies are employed in end-user devices such as pagers, communication systems, and mail systems such as voice mail and email systems. In wireless communication systems, a need exists to provide a new service in the wireless environment that is analogous to the call return feature provided on wired telephone handsets. A user may be unable to answer his wireless handset when a call is received. For example, the user may be in a meeting where the call would be perceived as a disruption, may be waiting for another call, may be busy on another call, or may not wish to interrupt whatever he is doing when he receives the incoming call.

In existing wireless handsets, a user may preset his wireless phone to avoid disruption of his activity when the incoming call arrives, but no provision has been made to allow the user to automatically return the call at a later, more convenient time. Thus, a user who is interrupted or busy cannot avoid answering the incoming call without one of: either missing the call entirely or having to manually redial a number saved on the terminal or on a system that indicates the phone number of the caller. Clearly, there is a need for a system, wireless apparatus and method for allowing a user the flexibility of automatically dialing back an incoming call in a wireless communication system.

The present invention provides a system, wireless apparatus and method for allowing a user the flexibility of automatically dialing back an incoming call in a wireless communication system at a time convenient to the user that received the call, a functionality that is analogous to the call return feature provided on wired telephone handsets. For example, a wireless phone may implement the present invention.

In the example below, implementation of the present invention is accomplished using a wireless phone in a Wireless Centrex System 140 (WCS). The WCS 140 provides a private wireless access system that is unconnected to any public macro-cellular system and provides Centrex-type services. Figure 1B shows a block diagram of an illustrative architecture of a WCS platform wherein the present invention may be utilized. The WCS platform includes a local digital switch 104 (LDS), a remote digital terminal 102 (RDT, e.g., SLC-2000), a network server platform 106 (NSP), voice access ports 103A, 103B (VAP) and a plurality of associated IS-136 digital time division multiple access (TDMA) cellular or personal communications service (PCS) mobile stations 101A, 101B which implement the present invention. The LDS 104 is a TR-08 and GR-303 compatible local digital switch that employs distributed intelligence, process-oriented software, and coordinated autonomous computing elements to provide a flexible, modular, reliable and robust digital switching system. The LDS 104 provides a single platform for advanced services, including Integrated Services Digital Network (ISDN), Centrex, Custom Local Area Signaling Services (CLASS), custom calling, and Advanced Intelligent Network (AIN) capabilities. The LDS 104 also supports X.25 packet switched data communication and circuit switched data, and provides a gateway to local and long distance networks. The switching fabric, administration, message switching, and call switching functions are provided by the LDS 104.

The AIN capabilities of the LDS 104 provide AIN switch software that enables the network provider to create, deploy, and change services to meet user's requests. The AIN software allows the LDS 104 to act as an AIN service switching point to communicate with service control points and intelligent peripherals. For example, the LDS 104 may be a 5ESS

manufactured by Lucent Technologies or a DMS-100 manufactured by Nortel. In the WCS configuration illustrated in Figure 1A, the NSP 106 acts a service control point, directing call processing on the LDS 104.

The RDT 104 is a digital loop carrier terminal that supports the plain old telephone system (POTS), ISDN, high-speed transport, and special services such as private lines and private branch exchange (PBX) services. For example, the RDT 102 may be implemented by a SLC2000 manufactured by Lucent Technologies or an Access Node manufactured by Nortel. The RDT 102 interfaces, typically at a central office, with the LDS 104. The RDT 102 provides the distribution of service interfaces between the LDS 104 and the user's premises, extending the digital access network.

The NSP 106 provides VAP 103A, 103B control, including mobile station and mobility management, call control, and feature applications. VAPs 103A, 103B are micro-cellular base stations or radio ports that support the IS-136 air interface with IS-136 mobile stations such as digital TDMA cellular/PCS (personal communications services) units 101A, 101B. The VAPs 103A, 103B support plug-and-play operations by connecting to the RDT 102 via standard open interfaces such as the ISDN basic rate interface (BRI) lines, typically using 2B+1D signaling protocol as is known in the art.

The IS-136 air interface standard is the EIA/TIA Interim Standard, also known as the North American or U.S. TDMA standard, that addresses digital cellular and PCS systems employing time division multiple access (TDMA). The IS-136 standard was developed to provide very flexible technical, service and investment options for subscribers and operators. IS-136 specifies a DCCH (Digital Control Channel) to support new features controlled by a digital signaling and control channel between a cell site (e.g., radio base station) and



terminal equipment (e.g., mobile station). The IS-136 air interface between the VAPs 103A, 103B and the mobile stations 101A, 101B can support voice and messaging applications. The mobile stations 101A, 101B may be, but are not limited to, a terminal or a typical wireless phone having a keypad, display screen, and an alarm generator for generating a ringing or tone sound.

The present invention is implemented in the above system by cellular or personal communications service (PCS) mobile stations 101A, 101B.

Figure 1B also includes POTS 108 and ISDN 109, which may be utilized as described above. The WCS offers a wireless access system with Centrex to provide voice access and may either supplement existing wired Centrex service with wireless access or provide wireless-only stand-alone telecommunications services. WCS can connect the NSP 106 to a macro-cellular network to support integrated mobility functions including terminal handoff and personal roaming features. The WCS provides location and mobility management for a WCS's subscriber mobile station 101A, 101B inside the WCS service area. Cordless communication may be provided anywhere, anytime in the WCS service area.

Figure 38 is a signal flow chart showing signaling flow steps for an illustrative embodiment implementing a call return in accordance with the present invention. Figure 38 shows the call flow when the user just requests to return the last incoming call. To facilitate understanding, the steps are partitioned into two general areas: a and b.

Section (a) of Figure 38 shows how to display the called number to the user. The user dials a predetermined feature access code, e.g., \*69, and presses the "send" button. An origination message, and optionally a serial number message, is sent by a mobile station MS

101A, 101B on a R-DCCH to a VAP 103A, 103B in accordance with the IS-136 standard.

The VAP receives the origination message and sends an origination request, for example,

where the dialed digit is \*69, to the NSP (point 1) and starts a first timer TO1. The NSP

receives the origination request message, identifies that the message is a feature request and

5 utilizes the ID of the MS 101A, 101B to check whether the MS 101A, 101B is a valid,

registered subscriber for the call return feature request. If the MS 101A, 101B is authorized

for the call return feature, the NSP retrieves the digits of the last calling party number or

directory number for returning the call (CallReturnDN) for the MS 101A, 101B and sends

an origination ACK message (point 2 -> point 3) with the display parameter that includes the

10 CallReturnDN to the VAP and starts the timer TCR1. The TCR1 timer is set to a

predetermined time that permits Q.931 call processing, i.e., if this time was exceeded, the

call would be terminated.

The VAP 103A, 103B stops the TO1 timer and sends a Q.931 call setup signal to the  
LDS 104. The LDS 104 sends an ISUP IAM signal to the PSTN/POTS 108 and may

15 display the number on the MS's screen in accordance with the display function set forth in

the IS-136 standard. However, if the VAP 103A, 103B has not received the origination ACK

from the NSP 106(point 3) before the expiration of the predetermined time that will allow

pre-processing of the feature request, the VAP 103A, 103B will stop the TO1 timer and

clear the origination request record.

20 Next, as shown in (b), the VAP 103A, 103B sends a Q.931 Setup signal to the LDS

104. Then the originating switch, the LDS 104, sends an ISDN User Part Initial Address

Message (ISUP IAM) to the destination switch of the public switched telephone network

(PSTN/POTS 108) to reserve an idle trunk circuit from the originating switch to the

destination switch. Then, the LDS 104 sends a Q.931 Call Proceeding signal to the VAP 103A, 103B. The VAP 103A, 103B sends an IS-136 digital traffic control (DTC) designation to the MS 101A, 101B. After the VAP 103A, 103B receives a DTC signal from the MS 10A, 101B, the destination switch of the PSTN/POTS 108 sends an ISDN user part Address Complete Message (ISDN ACM) to the originating switch, the LDS 104, to indicate that the remote end of the trunk circuit has been reserved. Next, the LDS 104 sends a Q.931 alerting signal to the VAP 103A, 103B. The ringback tone is initiated by the PSTN/POTS 108 over the trunk to the originating switch, the LDS 104. Then the PSTN/POTS 108 sends a ISDN User Part Answer Message (ISUP ANM) to the originating switch, the LDS 104, which then sends a Q.931 connect signal to the VAP 103A, 103B. The VAP 103A, 103B then sends a Q.931 connect acknowledgement signal to the LDS 104 and a signal indicating success via an origination result message to the NSP 106. The NSP 106 stops timer TCR1, and a voice path is established.

Clearly the phone number for the incoming call must be known, e.g., not security-protected for the feature of the present invention to function. Thus, when the phone number of the incoming call is unknown or security-protected, the present invention may indicate that the phone number is unable to be displayed by a screen display, providing a voice prompt, providing a predetermined tone, or the like.

ISDN User Part (ISUP) call signaling is utilized in the call pre-processing for implementing the feature of the present invention. ISUP defines the protocol and procedures that are used to set-up, manage, and release trunk circuits carrying data and voice calls over the public switched telephone network, PSTN. ISUP is used for ISDN and non-ISDN calls, but calls that originate and terminate at a same switch do not use ISUP

0453840-1339  
06/27/04 09:54:50

signaling. The ISUP message format includes information carried in the Signaling Information Field (SIF) which contains a routing label, a circuit identification code, and message type field. The ISUP Initial Address Message is sent in a "forward" direction by each switch needed to complete the circuit between the LDS and the destination switch of the PSTN until the circuit connects to the destination switch. The ISUP Address Complete Message is sent in the "backward" direction to indicate that the remote end of the trunk circuit has been reserved. The originating switch then connects the MS 101A, 101B to the trunk to complete the voice circuit. The destination switch generates a ringing tone. The MS 101A, 101B user hears the ringing tone on the voice trunk. When the called party answers, the destination switch terminates the ringing tone and sends the ISUP Answer Message to the originating switch. The ISUP message format depends on whether the ANSI standard or the ITU-T standard is being implemented.

Figure 39 illustrates one embodiment of steps for implementing a method for automatically returning an incoming call in a wireless communication system in accordance with the present invention. The steps include: receiving 3902 the incoming call by a wireless apparatus and automatically saving, where permitted, a phone number for the incoming call; and initiating 3904, upon one of: a predetermined button/buttons being pressed or a predetermined verbal call return command being issued, automatic dialing of the phone number for the incoming call by the wireless apparatus. Where desired, the method may further include, between the steps of receiving the incoming call and initiating dialing the phone number for the incoming call, automatically displaying 3906 the phone number of the incoming call on a display. Also, where selected, where the phone number for the incoming call is unknown or security-protected, the method may include indicating

3908 that the phone number for the incoming call is unable to be displayed. Indicating that the phone number for the incoming call is unknown or unavailable, for example, due to security protection, may be implemented by any known method such as, for example, using a display, a voice prompt, or a predetermined tone. Where, after the step of receiving the incoming call, at least one more incoming call is received, the method may include automatically saving 3910 a phone number for each incoming call. Where selected, the method may also implement a step of automatically displaying 3912 the phone number of a most recent incoming call, and/or allowing the user, at his convenience, to display the phone number of a most recent incoming call by manually pressing a predetermined button or buttons 3914 or using a verbal command, thus conserving power expenditure for the display. Where selected, before initiating dialing the phone number of the most recently received call, the user may dispose 3916 of a first displayed phone number by moving at least one first displayed phone number to an end of a list of phone numbers of incoming calls received and/or may also transpose the first displayed phone number with a next phone number of the incoming calls received. Each of these two steps may be repeated as many times as desired.

As shown in Figure 40, a wireless apparatus 4010 may be utilized for implementing the method of the present invention in a wireless communication system. Typically, the wireless apparatus 4010 is a wireless phone or another handheld wireless communications device such as, for example, a wireless digital assistant. The wireless apparatus includes a memory 4002, for automatically saving, where permitted, a phone number for the incoming call received; and a wireless call return processor 4004, coupled to the memory, for initiating, upon one of: a predetermined button/buttons 4006 being pressed or a predetermined verbal call return command being issued, automatic dialing of the phone

number for the incoming call using the wireless apparatus. Where selected, the memory may store other predetermined information. For example, a user profile may be downloaded to the memory to permit authentication of the MS 101A, 101B at the VAP. Also, where a listing of usage or billing record is downloaded from the NSP for updating at the billing office, to avoid error, the billing record may be marked as "in use" by the NSP until the updated billing record has been sent to the NSP. Alternatively, the time for the current usage may be accumulated in the memory for a predetermined period and then forwarded to the NSP for incorporation into the user's billing record. The wireless apparatus may further include a display 4008, coupled to the memory and the wireless call return processor, for automatically displaying, where permitted, the phone number of the incoming call on a display when the incoming call is received. The display 4008 operates as described above.

As shown in Figure 38, a wireless communication system may include a wireless apparatus for automatically returning an incoming call. The wireless communication system includes a switched communications network (for example, the PSTN 108), a NSP 106, a LDS 104, a VAP 103A, 103B, and at least one MS 101A, 101B. Each of the elements is arranged to communicate as described above.

Alternatively, as shown in Figure 41, the method of the present invention may be described as utilizing the steps of: configuring 4102 a wireless communication system to automatically return a previously received call; and returning 4104, automatically, the previously received call. The configuration of the wireless communication system and the automatic return of the previously received call are accomplished as described for Figure 38.

Figure 42 is a block diagram of one embodiment of a wireless communication platform for providing automatic wireless call return in accordance with the present

invention. The platform includes: at least one mobile station 4202 and a micro-cellular base station controller 4204. A micro-cellular base station means a base station in which components have been miniaturized to a degree such that the base station is mountable on a pole, shelf, or a wall. The micro-cellular base station controller 4204 is arranged to

5 communicate wirelessly with the at least one mobile station 4202 and to receive an incoming call directed to the at least one mobile station, for, when the at least one mobile station 4202 is processing another call, automatically returning the incoming call in accordance with a predetermined scheme to provide automatic call return for the at least one mobile station. The predetermined scheme is the method described above. Where selected,

10 the platform may further include a switching and database processor 4206 and a memory 4208. The switching and database processor 4206 is coupled to the micro-cellular base station controller 4204 and a memory 4208 and is used for switching the incoming call according to the predetermined scheme to provide an automatic call return for the at least one mobile station, upon one of: a predetermined button/buttons being pressed or a

15 predetermined verbal call return command being issued, by automatically dialing a phone number for the incoming call, wherein the phone number is stored in a database of the memory 4208. The memory 4208 is coupled to the micro-cellular base station controller 4204 and the switching and database processor 4206. Typically, the memory 4208 has a database stored thereon and is used for storing at least the phone number of the incoming

20 call. Where desired, the memory 4208 may further store further information such as authentication information for the at least one mobile station or billing information for the at least one mobile station.

Although the present invention has been described in relation to particular preferred embodiments thereof, many variations, equivalents, modifications and other uses will become apparent to those skilled in the art. It is preferred, therefore, that the present invention be limited not by the specific disclosure herein, but only by the appended claims.

5

### **XIX. Automatic Callback**

Technologies that facilitate wireless communication are emerging at an ever-faster rate. Such technologies are employed in end-user devices such as pagers, communication systems, and mail systems such as voice mail and email systems. In wireless communication systems, a need exists to provide a new service in the wireless environment for automatically calling back a phone number which is unavailable when the wireless user initiates a first call. A phone may be busy when the wireless user first calls, and busy again when the wireless user redials the number. It is clear that the wireless user's efficiency would be increased if the wireless user may be freed from having to redial the same busy number repeatedly in order to complete a call.

10

15

Present wireless handsets do not provide for automatic callback to free the user from having to redial, perhaps repeatedly, a number in order to complete a call. Clearly, there is a need for a system, wireless apparatus and method for providing automatic callback for a user in a wireless communication system when a called number is unavailable.

20

The present invention provides a system, wireless apparatus and method that provide an automatic callback functionality for wireless communication systems. The invention enables a wireless user to choose from a variety of modes for completing a call when the



dialed number is busy. Rather than simply redialing the phone number an indeterminate number of times until the connection is made on his wireless device, the caller may press a button or give a verbal command to initiate an automatic callback feature.

An example is set forth below for implementing the present invention in a Wireless  
5   Centrex System (WCS). The WCS mobile station MS is not required to redial the same number repeatedly when he receives a busy signal. The dialing and checking procedure is performed by the WCS network, thus freeing the wireless user to perform other tasks.

Typically, upon the called number becoming available, the WCS system informs the MS  
10   using a distinctive ringing and/or tone or a Short Message Service (SMS) message. Where the called number is available, but the MS already has an active call, the WCS system generates a voice prompt or special tone on the active call to notify the MS that the callback call is available. The MS may proceed as described below.

In one embodiment, the wireless user may activate the automatic callback feature by  
15   pressing a feature code, e.g., such as \*66, and pressing "send" when a busy signal is received. Alternatively, after receiving the busy signal, the user can disconnect the call and then activate the callback feature. The WCS system sends a feature activation confirmation message to the MS, disconnecting the MS. A default timer is set to a predetermined time that determines the length of time that the feature is activated. Typically, the default is set to  
20   30 minutes. The WCS system will automatically redial the number continuously (e.g., every 30 seconds) until a connection is made and notify the MS that the call is connected. If the predetermined default timer has expired (e.g., 30 minutes), then the WCS deactivates the feature and notifies the MS that the feature is deactivated. There may also be other scenarios wherein the WCS system will automatically be deactivated (e.g., when the mobile

powers down). Where the dialed number remains busy after the predetermined time set on the default timer, the WCS system cancels the feature and sends a message to the MS notifying the wireless user that the call was unable to be completed.

Where desired, the wireless user may enter a predetermined deactivation code, e.g.,

5 \*660, and push "send" to deactivate the feature.

In the example below, implementation of the present invention is accomplished using a wireless phone in a Wireless Centrex System 140(WCS). The WCS 140 provides a private wireless access system that is unconnected to any public macro-cellular system and provides Centrex services. Figure 1B shows a block diagram of an illustrative architecture of  
10 a WCS platform wherein the present invention may be utilized. The WCS platform includes a local digital switch 104 (LDS), a remote digital terminal 102 (RDT, e.g., Lucent Technologies SLC-2000), a network server platform 106 (NSP), voice access ports 103A, 103B (VAP) and a plurality of associated IS-136 digital time division multiple access (TDMA) cellular or personal communications service (PCS) mobile stations 101A, 101B  
15 which implement the present invention. The LDS 104 is a TR-08 and GR-303 compatible local digital switch that employs distributed intelligence, process-oriented software, and coordinated autonomous computing elements to provide a flexible, modular, reliable and robust digital switching system. The LDS 104 provides a single platform for advanced services, including Integrated Services Digital Network (ISDN), Centrex, Custom Local  
20 Area Signaling Services (CLASS), custom calling, and Advanced Intelligent Network (AIN) capabilities. The LDS 104 also supports X.25 packet switched data communication and circuit switched data, and provides a gateway to local and long distance networks. The

switching fabric, administration, message switching, and call switching functions are provided by the LDS 104.

The AIN capabilities of the LDS 104 provide AIN switch software that enables the network provider to create, deploy, and change services to meet user's requests. The AIN software allows the LDS 104 to act as an AIN service switching point to communicate with service control points and intelligent peripherals. For example, the LDS 104 may be a 5ESS manufactured by Lucent Technologies or a DMS-100 manufactured by Nortel. In the WCS configuration illustrated in Figure 1A, the NSP 106 acts a service control point, directing call processing on the LDS 104.

The RDT 102 is a digital loop carrier terminal that supports the plain old telephone system (POTS), ISDN, high-speed transport, and special services such as private lines and private branch exchange (PBX) services. For example, the RDT 102 may be implemented by a SLC2000 manufactured by Lucent Technologies or an Access Node manufactured by Nortel. The RDT 102 interfaces, typically at a central office, with the LDS 104. The RDT 102 provides the distribution of service interfaces between the LDS 104 and the user's premises, extending the digital access network.

The NSP 106 provides VAP 103A, 103B control, including mobile station and mobility management, call control, and feature applications. VAPs 103A, 103B are micro-cellular base stations or radio ports that support the IS-136 air interface with IS-136 mobile stations such as digital TDMA cellular/PCS (personal communications services) units 103A, 103B. The VAPs 103A, 103B support plug-and-play operations by connecting to the RDT 102 via standard open interfaces such as the ISDN basic rate interface (BRI) lines, typically using 2B+D signaling protocol as is known in the art.

The IS-136 air interface standard is the EIA/TIA Interim Standard, also known as the North American or U.S. TDMA standard, that addresses digital cellular and PCS systems employing time division multiple access (TDMA). The IS-136 standard was developed to provide very flexible technical, service and investment options for subscribers and operators.

5 IS-136 specifies a DCCH (Digital Control Channel) to support new features controlled by a signaling and control channel between a cell site (e.g., radio base station) and terminal equipment (e.g., mobile station). The IS-136 air interface between the VAPs 103A, 103B and the mobile stations 110 can support voice and messaging applications. The mobile stations 101A, 101B may be, but are not limited to, a terminal or a typical wireless phone  
10 having a keypad, display screen, and an alarm generator for generating a ringing or tone sound and translation between text and speech.

The automatic callback functionality of the present invention is implemented in the above system by cellular or personal communications service (PCS) mobile stations 101A, 101B.

15 Figure 1B also includes POTS 108 and ISDN 109 interfaces for connecting analog and ISDN phones, respectively. The WCS offers a wireless access system with Centrex to provide voice access and may either supplement existing wired Centrex service with wireless access or provide wireless-only stand-alone telecommunications services. WCS can connect the NSP 106 to a macro-cellular network to support integrated mobility  
20 functions including terminal handoff and personal roaming features. The WCS provides location and mobility management for a WCS's subscriber mobile station 101A, 101B inside the WCS service area. Cordless communication may be provided anywhere, anytime in the WCS service area.

Though not shown in Figure 43, the WCS system determines whether the user may validly request the automatic callback feature functionality. Upon receiving the origination request message, the NSP 106 analyzes the dialed digits and identifies that the automatic callback feature has been requested. The NSP 106 also checks the Wireless Centrex System Directory (WCSD) via the Mobile Identification Number (MIN) to determine if the MS 101 is authorized for the automatic callback feature requested. If the validation is successful, the NSP 106 uses the MSID to last dialed DN mapping to retrieve the DN that was dialed by the MS 101 previously, sends an origination NACK with the last dialed DN message to the VAP 103.

The VAP 103 sends an IS-136 Reorder/Intercept message to the MS 101 informing the user that the automatic callback feature is activated for the last dialed DN. If the validation is not successful or the last dialed DN is not known, the NSP 106 sends an originating NACK message with reject information to the MS 101. The VAP 103 sends an IS-136 Reorder/Intercept message to the MS 101 informing the user that the automatic callback feature was not activated. Feature Activation/Deactivation is described more fully in Section IX herein.

Figure 43 shows a preferred embodiment for signaling flow in accordance with the automatic callback functionality of the present invention. As shown in (a), the NSP 106 sets the feature activation timer for a predetermined length of time (e.g., 30 minutes) when the feature is activated. The NSP will continuously initiate calling the Last Dialed DN for every predetermined time (e.g., 30 seconds) by sending a StartAutoCallBack message including the Mobile Station IDentification code (MSID) and the Last Dialed Directory Number (LastDialedDN) to the VAP 103 and starts the TAC1 timer. The VAP 103 initiates

the call origination process by sending a Q.931 setup message to the LDS 104 utilizing the LastDialedDN.

As described below, ISDN User Part (ISUP) call signaling is utilized in the call pre-processing for implementing the feature of the present invention. ISUP defines the protocol and procedures that are used to set-up, manage, and release trunk circuits carrying data and voice calls over the public switched telephone network, PSTN. ISUP is used for ISDN and non-ISDN calls, but calls that originate and terminate at a same switch do not use ISUP signaling. The ISUP message format includes information carried in the Signaling Information Field (SIF) which contains a routing label, a circuit identification code, and message type field. The ISUP Initial Address Message is sent in a "forward" direction by each switch needed to complete the circuit between the LDS and the destination switch of the PSTN until the circuit connects to the destination switch. The ISUP Address Complete Message is sent in the "backward" direction to indicate that the remote end of the trunk circuit has been reserved. The originating switch then connects the MS to the trunk to complete the voice circuit. The destination switch generates a ringing tone. The MS user hears the ringing tone on the voice trunk. When the called party answers, the destination switch terminates the ringing tone and sends the ISUP Answer Message to the originating switch. The ISUP message format depends on whether the ANSI standard or the ITU-T standard is being implemented.

Thus, as shown in Figure 43, portion (a), upon initiation of the automatic callback feature, the originating switch, the LDS 104, sends an ISDN User Part Initial Address Message (ISUP IAM) to the destination switch of the public switched telephone network (PSTN) 125 to reserve an idle trunk circuit from the originating switch to the destination

switch. Then, the LDS 104 sends a Q.931 call proceeding signal to the VAP 103. The destination switch of the PSTN 125 then sends an ISDN user part Address Complete Message (ISDN ACM) to the originating switch, the LDS 104, to indicate that the remote end of the trunk circuit has been reserved. Next, the LDS 104 sends a Q.931 alerting signal to the VAP 103, and the VAP 103 sends a StartAutoCallback Proceeding message to the NSP 106 to notify the NSP 106 that an alerting message have been received from the LDS 104 indicating that the dialed DN is now alerted and waiting for an answer. If the destination user is still busy when the call is attempted, the destination switch 125 returns an ISUP REL (release) message to LDS 104, indicating that the called user is busy. The LDS 104 initiates Q931 call clearing to the VAP. The VAP notifies the NSP of the failure. The NSP resets its timer and waits for a predetermined time (e.g., 30 seconds) before initiating the callback procedure again.

Continuing the description of Figure 43, in portion (b), upon receiving the StartAutoCallBack Proceeding message from the VAP 103, the NSP 106 cancels timer TAC1 and sends a Page Request message (MSID, Signal) to the VAP 103. The VAP will then send an IS-136 Page to the MS 101. The MS 101 sends an IS-136 Page Response to the VAP 103. Then, the VAP 103 sends the page response to the NSP 106. The NSP 106 sets timer TAC2 to wait for completion of the call. The VAP 103 also sends an IS-136 Digital Traffic Channel (DTC) designation to the MS 101. The MS 101 then tunes to the designated DTC. The VAP 103 sends an IS-136 Alert with information (Signal) to the MS 101. Note the signal can be a special tone indicating to the MS user that the call is their automatic callback call. The MS 101 sends an IS-136 Mobile ACK, then an IS-136 Connect signal, to the VAP 101. The ringback tone is initiated by the PSTN 125 over the trunk to the

MS 101. Then the PSTN 125 sends a ISDN User Part Answer Message (ISUP ANM) to the originating switch, the LDS 104, which then sends a Q.931 connect signal to the VAP 103. The VAP 103 then sends a Q.931 connect acknowledgement signal to the LDS 104 and a signal indicating success via an origination result message (Auto Callback Result (Successful)) to the NSP 106. The NSP 106 stops timer TAC2, and a voice path is established.

A predetermined time is set on timer TAC1 and timer TAC2 such that Q.931 and IS-136 call processing may take place. If the predetermined time is exceeded, the NSP 106 will initiate procedures to clear the call. Where the predetermined time set on the timer TAC1 or TAC2 has expired, or the StartCallBack Result signal indicates failure, the NSP 106 sends a Cancel AutoCallBack message to the VAP 103 and deactivates the automatic callback feature for the MS 101. In addition, the NSP 106 can send a short message to the MS 101 to indicate that the automatic callback feature has been cancelled or the time for the automatic callback has expired. Where desired, the MS 101 may re-request that the automatic callback feature be activated either by redialing the feature code or by a voice command.

Figure 44 is a signal flow chart showing a preferred embodiment of signaling flow when the MS moves from an original serving VAPo to a new VAPn before a call is connected. The MS 101 activates the Automatic Callback feature and moves from the original VAPo 103A to another VAPn 103B. The VAPn 103B sends a Handoff Result message to the NSP 106 to indicate that handoff has occurred. The NSP 106 sends Cancel AutoCallBack message containing the MSID and the LastDialedDN to the VAPo 103A and starts a TACBC1 timer. If the VAPo has already initiated a Q.931 call setup process to Last Dialed DN, then the VAPo initiates a Q.931 call release procedure to clear the call attempt.



The VAPo 103A sends a Cancel AutoCallback Ack message to the NSP 106. The NSP 106 stops the TACBC1 timer and assumes Automatic Callback procedures and signaling exchange with VAPn. If the NSP 106 timer TACBC1 expires before receiving the Cancel AutoCallback Result message from the VAPo or the cause for cancellation is not indicated as successful, the NSP 106 continues the new Automatic Callback feature with the VAPn 103B.

The WCS may be configured to offer service within a local access environment. While the IS-136 standard is used to illustrate the best mode for carrying out the invention, the invention is not limited to use in the IS-136 standard. The invention is also applicable to other cellular and/or PCS systems.

Figure 45 is a flow chart showing one embodiment of steps of a method in accordance with a preferred embodiment of the present invention. The method provides for, where a number called by a wireless user is busy, automatically redialing the call in a wireless communication system, and includes the steps of: A) placing an outgoing call by a wireless apparatus and automatically saving, where permitted, a called phone number for the outgoing call; and B) initiating, upon one of: a predetermined button/buttons being pressed or a predetermined verbal callback command being issued, automatic redialing of the phone number for the outgoing call by the wireless apparatus. Where desired, the method may further include, upon being connected after redialing, automatically displaying the phone number for the outgoing call on a display.

Where selected, the method may further include, after placing a plurality of outgoing calls and saving the called phone numbers, where the called phone numbers are displayed, disposing of a first displayed phone number. A displayed phone number may be

disposed of by one of: moving 4510 at least a first displayed phone number to an end of a list of phone numbers of outgoing calls or transposing 4512 the first displayed phone number with a next phone number of the outgoing calls.

Where an automatic callback call is received 4514, the method may include one of:

- 5 pressing a button/giving a verbal command 4516 to speak immediately with the individual returning the call; pushing a button/giving a verbal command 4518 to place a call in progress on hold and speak immediately with the individual returning the call; and pushing a button/giving a verbal command 4520 to implement a functionality of placing the incoming call on hold and playing a prerecorded message that explains that the call is being put on  
10 hold for a short period of time. The callback call may be terminated when the wireless user does not answer within a predetermined time.

Figure 46 is a block diagram of a preferred embodiment of a wireless apparatus that may be utilized for implementing the method of the present invention in a wireless communication system. The wireless apparatus 4610 may include: a memory 4602, for  
15 automatically saving a phone number that was busy when called and, if selected, phone numbers of incoming calls; and a wireless automatic callback processor 4604, coupled to the memory, for initiating a wireless callback communication, upon one of: a predetermined button/buttons 4606 being pressed or a predetermined verbal callback command being issued, by automatically redialing the phone number for the call. The wireless apparatus  
20 may also include a display 4608, coupled to the memory 4602 and the wireless automatic callback processor 4604, for automatically displaying the phone number of the redialed call, and/or a phone number of an incoming call, where permitted, on a display when the incoming call is received. Where the phone number for the incoming call is one of:

unknown or security-protected, the display may indicate that the phone number for the incoming call is unable to be displayed. Alternatively, a voice prompt or predetermined tone may indicate that the phone number for the incoming call is unable to be displayed.

Where selected, the memory may automatically save a phone number, where  
 5 permitted, for a plurality of incoming calls and the display may provide for automatic display, where permitted, of a phone number of a most recent incoming call. Alternatively, the wireless automatic callback processor may dispose of a first displayed phone number by moving at least one first displayed phone number to an end of a list of phone numbers of incoming calls received or transposing the first displayed phone number with a next phone  
 10 number of the incoming calls received. The two preceding procedures may be repeated as desired.

Typically, the wireless apparatus is a wireless phone or another handheld wireless communications device such as, for example, a personal digital assistant.

A wireless communication system may include a wireless apparatus described above  
 15 for automatically redialing a call where a phone number for the call is busy when the wireless user places the call. The system may operate as described above or in an equivalent fashion. For example, the system may include: a switched communications network, coupled to at least a first remote digital terminal RDT 102; at least a first network server platform NSP 106, coupled to at least a first local digital switch LDS 104; the at least first  
 20 LDS 104, coupled to the at least first RDT 102 and the at least first NSP 106, and, where selected, to a voice message system VMS 107; the at least first RDT 102, coupled to the at least first LDS 104, at least a first voice access port VAP 103A, 103B; the at least first VAP 103A, 103B, coupled to the at least first RDT 102 and arranged to communicate with at least

a first mobile station MS 101A, 101B; the at least first mobile station MS 101A, 101B, arranged to communicate with the at least first VAP 103A, 103B, wherein the at least first MS 101A, 101B includes the wireless apparatus for automatically redialing the number, and wherein the switched communications network, the at least first NSP 106, the at least first LDS 104, the at least first RDT 102, the at least first VAP 103A, 103B and the at least first MS 101A, 101B utilize a predetermined scheme to provide automatic callback for the wireless apparatus.

Figures 47A-47C represent a flow chart showing another embodiment of steps for implementing the automatic callback feature of the present invention wherein the intelligence of the automatic callback feature is in the VAP rather than in the NSP as previously shown in Figure 43. Figure 43 illustrates network centric intelligence (i.e., NSP) whereas Figures 47A-47C illustrate a distributed intelligence embodiment. Figure 47A illustrates steps during call establishment/activation; Figure 47B illustrates steps for the NSP procedure. Figure 47C illustrates steps for the VAP procedure. The automatic callback (ACB) feature frees the user from re-dialing the same busy number repeatedly. The wireless user is typically alerted by a special ringing tone when the called party becomes available. when the NSP 106 stores 4702 a last dialed digit for an automatic callback subscriber, the NSP 106 determines 4704 whether the automatic callback feature can be activated by the wireless user. When the automatic callback feature cannot be activated and validated, the NSP 106 rejects 4706 the automatic callback request and informs the user. Where the automatic callback feature can be activated and validated, the NSP 106 does so and starts a timer (in one embodiment the timer is set for 30 minutes) and informs the VAP 103A, 103B to start the automatic callback process. Then, the VAP 103A, 103B start 4710 the automatic

callback process, and the NSP 106 starts 4712 the automatic callback process. While the VAP 103A, 103B is processing the automatic callback procedure, the following can occur:

1. The MS moves to another VAP (either via handoff or location registration), and the NSP informs the former VAP to cancel the automatic callback and the new VAP to start  
5 automatic callback.
2. The MS powers down, and power down registration is sent to the NSP. The NSP cancels the automatic callback for the VAP and for itself.
3. The MS becomes busy while the VAP is completing the call to the MS and the wireless user does not answer the call. The VAP releases the call, cancels the automatic callback  
10 and informs the NSP. The NSP determines that the procedure failed because the MS is busy and informs the VAP to restart the automatic callback procedure.

The above scenarios are valid only during the time period when the NSP has instructed the serving VAP to initiate the automatic callback procedure and the VAP fails when it attempts to page the MS.

15 There are typically two controlling timers. Clearly, more timers may be utilized, and various times for the timers may be predetermined by the user. In the embodiment shown, a 30 minute (T1) timer is used in the NSP and a 30 second (T2) timer is used on the VAP side. Figure 47B illustrates steps for one embodiment implementing the NSP 4712 procedure. T1 is the master timer. The NSP determines 4718 whether T1 has expired. When the master  
20 timer has expired 4720, the NSP informs the VAP to cancel the ACB and cancels ACB on the NSP side. Where T1 has not expired, the NSP determines 4722 whether it has received a result message (msg) from the VAP. Where no result message has been received, the NSP returns to checking whether T1 has expired 4718. Where a result message has been

received, the NSP determines 4724 whether the cause for receiving the result message is a successful call. Where the automatic callback has been successful, the NSP cancels the timer (T1) 4726. Where the automatic callback has been unsuccessful, the NSP informs 4728 the serving VAP to start the automatic callback procedure.

5           Figure 47C illustrates one embodiment of steps for the VAP 4710 procedure. T2 on the VAP side will only control the call establishment time for the VAP. The VAP will try every 30 seconds to establish a call with the remote user until the call is successfully connected or the procedure is cancelled. Typically, for example, the VAP may notify the NSP that the VAP plans to utilize the B channel for call establishment by sending a  
10   BchnlStatus message. The VAP will start T2 (the 30 second timer) 4732. The VAP determines 4734 whether 30 seconds has expired. If 30 seconds has not yet expired, the VAP continues to check whether the 30 seconds has expired 4734. If the 30 seconds has expired, the VAP determines whether the NSP has notified the VAP to stop/cancel 4736 the automatic callback procedure. If the NSP has notified the VAP to stop or cancel the  
15   automatic callback procedure, the VAP cancels/stops 4738 the automatic callback procedure. If the NSP has not notified the VAP to stop or cancel the automatic callback procedure, the VAP determines 4740 whether there are resources available to complete the call. If resources are not available, the VAP returns to the step of starting T2 4732. If resources are available, the VAP initiates 4742 the call to the destination user. In the  
20   diagram and similarly for Figures 47A and 47B, a circle 4744 simply serves to show the connection between the top portion of Figure 47C with the bottom portion of Figure 47C. The call setup procedure will indicate to the VAP whether the PSTN user is still busy. If the PSTN user is still busy, the VAP releases 4748 the call, which in this example, releases the

5 B channel and the VAP resets the T2 timer 4732. If the PSTN user is no longer busy, the VAP pages 4750 the MS. Then, the VAP determines 4752 whether the MS has responded. If the MS has not responded, the VAP releases the call, sends notification to the NSP and cancels 4764 the automatic callback procedure. If the MS has responded, the VAP connects 4754 the call to the MS. Then, the VAP determines 4756 whether the call is connected. If the call is connected, the VAP cancels 4762 the automatic callback procedure and informs the NSP. If the call is not connected, the VAP releases 4758 the call, which in this example, releases 4760 the B channel and the VAP resets the T2 timer 4732.

10 Thus, when the T2 timer expires, the VAP first checks whether the MS is idle and then retries to establish the call. If the remote user is busy, VAP will reset the timer. If the remote user is idle VAP will attempt to terminate the call to the MS. If the VAP fails to establish a call with the MS (i.e., the MS is busy, powered down, moved out of coverage area) VAP will immediately cancel ACB on the VAP and inform NSP. The NSP then determines the status of the ACB procedure (explained in detail above).

15 Figure 48 is a flow chart showing another embodiment of steps in accordance with the method of the present invention. The method includes the steps of: configuring 4802 a wireless communication system to automatically redial a phone number of a call when the phone number called by a wireless user is busy; and redialing 4804, automatically, the phone number when the phone number called by the wireless user is busy.

20 Figure 49 is a block diagram of one embodiment of a wireless communication platform for providing wireless automatic callback in accordance with the present invention. The wireless communication platform includes at least one mobile station 4902 and a micro-cellular base station controller 4904 for wireless automatic callback that is arranged

to communicate wirelessly with the at least one mobile station. When a number called by the at least one mobile station 4902 is busy, the micro-cellular base station controller 4904 for wireless automatic callback automatically redials the number to provide automatic callback for the at least one mobile station. The wireless communication platform may further include a switching and database automatic callback processor 4906 for wireless automatic callback that is coupled to the micro-cellular base station controller 4904 for wireless automatic callback and a memory 4908. The switching and database automatic callback processor 4906 provides processing for wireless automatic callback for the at least one mobile station upon one of: a predetermined button/buttons being pressed or a predetermined verbal callback command being issued, by automatically redialing the number. The memory 4908 is coupled to the micro-cellular base station controller 4904 for wireless automatic callback and to the switching and database automatic callback processor 4906. The memory 4908 has a database for storing at least the number redialed. Where selected, the memory 4908 may further store information for authentication and/or billing information for the at least one mobile station.

Although the present invention has been described in relation to particular preferred embodiments thereof, many variations, equivalents, modifications and other uses will become apparent to those skilled in the art. It is preferred, therefore, that the present invention be limited not by the specific disclosure herein, but only by the appended claims.

## **XX. Speed Calling**

The speed calling feature allows a subscriber to compile a list of phone numbers in which each phone number is associated with a unique speed calling code. A subscriber can



provision a unique speed calling code for one or more telephone numbers. When an MS user enters a valid speed calling code, the WCS system will complete the call using the telephone number in the speed calling list corresponding to the speed calling code entered.

There are several ways a subscriber can provision a telephone number for speed calling. For example, the user may access the Internet or a web-based interface such as a WCS web site and input and update a list of phone numbers having speed calling. Also, the subscriber may contact a customer care center representative by phone and verbally communicate the numbers through any type of communications unit (e.g., cell phone, landline phone, wireless palm top computer phone, etc.). Alternatively, a user may be directed through an automated phone menu to input the numbers by use of a communications unit keypad or voice recognition system.

According to one embodiment, the user may provision the speed calling telephone numbers through the WCS system. In this regard, the subscriber may activate the feature by entering a feature activation code, a speed calling code (e.g., 1-30) followed by a phone number (e.g., \*75\*1#5555151) into the keypad of MS 101A and then pressing the "send" button. Actuation of the "send" button sends the feature activation message to the WCS system (e.g., NSP 106). The WCS system then may acknowledge activation of the feature, by returning a short message to the MS 101A, or alternatively an aural communication, including identity of the feature activated, the speed calling code and phone number, for example. In addition, a message indication that a call origination request has been rejected can be used to provide feature activation/deactivation status information.

In a further modification, the speed calling code may be automatically assigned such as with the first available speed calling code. Thus, the subscriber might send the feature

activation code followed by the telephone number (e.g., \*75\*#5555151) to the WCS system.

In this instance, when the subscriber fails to enter a speed calling code, a speed calling code may be automatically assigned to the telephone number. Illustratively, if thirty codes are available (code numbers 1-30) and code numbers 1, 2, 4 and 7 have been assigned, the

5 system can assign the next available code, which would be code number 3 to the telephone number input by the subscriber. If all available speed calling codes are assigned, the system can send a short message or aural message indicating the same, or can send status information with a message indicating that a call origination request has been rejected.

Also, the subscriber may enter a code requesting the system to identify the telephone  
10 number associated with a speed calling code.

To delete a phone number from the speed call list, the subscriber may overwrite the existing phone number assigned to a speed call code with another number. Alternatively, the subscriber may enter a feature deactivation code followed by the telephone number and press the "send" button. Also, the subscriber may deactivate the speed calling codes for all  
15 numbers by entering a global feature deactivation code and the "send" button on the MS 101A. A more detailed discussion of feature activation and deactivation is provided at other places in the instant description, for example at section IX, above.

To implement the speed call feature, the subscriber dials the speed calling code (e.g., \*1) for the desired telephone number and presses the "send" button on MS 101A. If the  
20 speed call code entered is unassigned, an error message will be returned to the subscriber by a short message or otherwise.

According to an illustrative embodiment of the invention, the speed call list may be stored in a memory in the NSP 106 or a memory location accessible to the NSP 106. The

list may include any amount of numbers depending on the capacity of the memory employed. In one embodiment, up to thirty numbers may be defined to have a unique speed call code and the size of the telephone numbers can range from 1-17 digits.

Figure 50 provides an exemplary call flow diagram for implementing the speed call feature according to an illustrative embodiment of the present invention. While the IS-136 standard is used to illustrate one implementation of the present invention, it should be understood that the present invention is applicable to other cellular or PCS systems.

When a WCS subscriber wants to place a call utilizing speed calling, the subscriber inputs the speed calling code \*n, where n is the code and actuates the "send" button. In response, MS 101A sends an IS-136 origination [DN=\*n] message 5002 to a VAP 103A at which the MS 101A is registered. Also, the MS 101A sends an IS-136 serial number message 5004 to the VAP 103A. In response, the VAP 103A sends a proprietary origination request message (Origination Request [dialed digit=\*N]) 5006 to the NSP 106 and starts timer T01. The NSP 106 receives the origination request message 5006 and identifies that a speed call attempt is being made.

The NSP 106 then determines whether MS 101A subscribes to the speed call feature by comparing the MIN of MS 101A with an authorized subscriber list maintained in the WCSD. If the MS 101A is not authorized for the speed call feature, then the NSP 106 sends the VAP 103A an origination non-acknowledgment (NACK) message (not shown) and indicates that the MS 101A does not subscribe to the speed call feature. The timer T01 is canceled and the VAP 103A then notifies the MS 101A subscriber through a short message or aural message that it does not subscribe to the speed call feature.

If the MS 101A is authorized for the speed call feature, then the NSP 106 determines whether the speed call code input by the subscriber corresponds to a telephone number. If no number corresponds to the entered speed call code, a NACK message is sent to the VAP 103A including a DN unavailable message and the timer T01 is canceled. The DN  
5 unavailable message is then delivered by the VAP 103A to the MS 101A.

If the MS 101A is authorized for the speed call feature and a phone number corresponds to the speed call code entered, the NSP retrieves the telephone number associated with the speed dialing code from the speed dial list. Then, the NSP 106 sends an origination acknowledgement message 5008 (origination ACK (SpeedDial DN) including  
10 the telephone number to the VAP 103A and starts the timer TSC1. Responsive to the origination acknowledgement message 5008, the VAP 103A cancels timer T01 and initiates a Q.931 call set up procedure using the telephone number corresponding to the speed dial code, i.e., speed dial DN. If the T01 timer expires before the VAP 103A receives the origination acknowledgment message 5008, the VAP 103A sends an IS-136  
15 reorder/intercept message (not shown) to MS 101A including information about what went wrong similar to when the VAP 103A receives an origination NACK message.

The call set up procedure is similar to call set up procedure described elsewhere in this application, but will be described here for completeness. To set up the call, the VAP 103A reserves an RF DTC channel and sends a Q.931 setup [speed dial DN] message 5010  
20 to the LDS 104. The LDS 104 then examines the speed dial DN in the Q.931 setup message 5010 and sends an ISUP IAM message 5012 to a far end switch in the PSTN 125 for end-to-end connectivity. Also, the LDS 104 sends a Q.931 call proceeding message 5014 to the VAP 103A. The VAP 103A then sends an IS-136 Digital Traffic Channel (DTC)

Designation 5016 message to the MS 101A so that MS 101A may tune to the designated traffic channel. MS 101A informs VAP 103A that it is using the designated DTC by responding with an MS on DTC message 5018. The VAP 103A then detects that the MS 101A is tuned to designated traffic channel, and cuts through the voice path 5034 between  
5 the RF DTC channel and an ISDN B channel.

The destination switch in the PSTN 125 sends an ISUP ACM message 5020 to the LDS 104. In response, the LDS 104 sends a Q.931 alerting message 5022 to VAP 103A. Next, a ringback tone 5024 is delivered to the MS 101A from the destination switch. Also, the PSTN 125 sends an ISUP ANM message 5026 to the LDS 104. Following receipt of the  
10 ISUP ANM message 5026, the LDS 104 sends a Q.931 connect message 5028 to the VAP 103A, removes the ringback tone 5024, and cuts through the voice path 5034. The VAP 103A then sends a Q.931 connect ACK message 5030 back to the LDS 104 to acknowledge the connection. Responsive to the Q.931 connect ACK message 5030, the VAP 103A sends origination result [success] message 5032 to the NSP 106 for billing and other OAM&P  
15 purposes. At this point, voice path 5034 has been established and the call proceeds between the MS 101A and the party called using the speed call code.

While the above description relates to an example of speed calling for a party coupled to a PSTN, it should be understood that a speed calling code may be set up for any party which a subscriber may call including, but not limited to, a WCS subscriber, a landline  
20 subscriber, and a cellular subscriber. Also, multiple phone numbers can be assigned to a single unique speed calling code such that entry of the speed calling code will initiate a call involving parties at each of the multiple phone numbers in a conference call. Reference is

made herein to the description of conference calling in Section XXI below, which can be modified to provide for a speed call code to originate a three-way call, for example.

## XXI. Conference Calling

### A. Adding A Party To An Existing Call

The conference call feature/function allows a MS 101 user to talk with two or more parties at the same time. Once the MS 101 user is on a first active call, he can enter a feature code, for example by keying in \*33# on the MS 101 keypad followed by a third party's DN (conference with DN) and then pressing a transmit key, for example, the "send" button, to initiate a conference call. Once validated by the WCS network determining that the MS-101 user is authorized to use the conference calling feature/function, an announcement is provided, for example, a voice prompt or a special tone will be heard by the MS 101 user (and optionally to the second party to an active call) indicating that a conference call connection (e.g., Three-Way Calling) has been requested. After the third party answers, the MS 101 user may then enter another code, for example by pressing the "send" button on the MS 101, to begin the multi-party conference call conversation.

The following detailed description of the conference call feature/function is described in terms of a three way call for ease of explanation and because one typical local digital switch has three way switches for each wireline. However, one skilled in the art will recognize that a switch having greater than three possible line connections (i.e., more than a three-way switch) may be provided in the local digital switch, e.g., a six way switch. Therefore, the conference call feature/function, although described in specific embodiments

below illustrating three-way calling, is also applicable to conference calls having more than three parties by repeating portions of the conference call initiation and setup procedures.

Further, the signal flows used for Three-Way calls in this document are directed to comply with the Lucent 5ESS local digital switches and may apply to other local digital switches, such is the Nortel DMS-100 local digital switches, with or without modifications. Since the interface between LDS 104 and the VAP 103 is based on standard Q.931 messages it is supported by all LDSs. So, with minimum changes (if needed), the exemplary call flow described with reference to the Lucent 5ESS would work with other LDSs such as the Nortel DMS-100.

The conference call feature/function provides an MS 101 user with a convenient and user friendly method of creating a multi-party call. Once the MS 101 user has established an active call, for example a two-way call, with one or more other parties the MS 101 user is free to initiate adding a person for a conference call. First, while on an active call, the MS 101 user may indicate to the other party that a Three-Way call will be requested. After entering the conference call feature code, e.g., pressing the \*33#, followed by the third party's DN, the MS 101 user will transmit this information to the WCS by, for example, pressing the "send" button. The existing second party is then put on hold and the MS 101 user initiating the conference call feature/function will be provided an announcement, for example, a voice prompt or a special tone on the MS 101 indicating the Three-Way call activation is now proceeding. The voice prompt or special tone may also be provided to the other party, or alternatively other audible sounds may be provided to the other party such as music.

If the MS 101 user initiates the conference call feature/function during an already active three-way call they initiated, and the LDS 104 is equipped with a switch that is capable of handling connection of another party (i.e., more than a three-way switch), the request for another conference call initiation will be honored and a similar connection procedure will ensue. However, if the LDS 104 is equipped with only a three-way switch, the request for another conference call initiation to add an additional party will be rejected and an appropriate notification (e.g., an announcement) of the limitation to a three-way call will be provided to the MS 101 user. Furthermore, if the MS 101 user transmits an empty message by, for example, pressing the "send" button before the original call is put on hold, the NSP 106 will ignore it.

When the call goes through to the third party, the MS 101 user who initiated the conference call will hear the ringing tone. If the third party answers, the MS 101 user can press a key on the MS 101, for example, the "send" button, (within a certain time period) to retrieve the held call(s) and complete the conference call (e.g., Three-Way) connection. In one alternative embodiment, the MS 101 cannot disconnect a third party who answers without first establishing a three-way connection. If the third party answers and the initiator presses a transmit key, for example, the "send" button once, to set up a three-way call but the original two-way call could not be retrieved for some reason (e.g., the party to the original two-way call on hold has hung up), the two-way call with the second called party will continue. An indicator, for example a voice prompt, indicating that the party on hold can not be connected may be provided to the MS 101 user who initiated the conference call feature/function.



5 party (rather than the third party is busy or is not answering the phone), the MS 101 user can enter a code message, for example, press the “send” button once, to retrieve the original call placed on hold. On the other hand, if the third party’s line is busy or the third party does not answer the phone, the MS 101 can enter another code message, for example the MS 101 can press the “send” button twice, to disconnect the second leg of the call and retrieve the  
10 original call on hold. Once again, if the original called party has already disconnected, an indication that the original called party is disconnected may be provided, e.g., an announcement such as a voice prompt may be played to the MS 101 user.

15 “send” button once, within a certain amount of time and establish a three-way conference. In  
one alternative embodiment the initiator can disconnect from the third party voice mail and  
end the conference call by pressing the “send” button twice only after the three-way call has  
been established. Thus, in this embodiment the MS 101 conference call initiator must  
establish the conference call connection by retrieving the original call in order to disconnect  
20 from the third party’s voice mail.

At any time during an established conference call, the MS 101 user can enter a feature code message, for example by pressing the “send” button twice quickly (within a certain amount of time, e.g., within a few seconds) and disconnect the last added call. To

end all calls the MS 101 user can enter another code, for example the initiator may just press the "End" button.

Referring now to Figures 51 and 52, a discussion of various scenarios for a preferred embodiment having a three-way conference call is illustrated using a process flow chart. In a first instance, an MS 101 user calls another party, either another MS 101 user or a PSTN user, and establishes an active two-way call in progress at step 5101. During the active two-way call the MS 101 initiates a three-way conference call by entering a feature code and a conference to directory number (DN) of the party to be added (e.g., third party), and then press a process initiation key by pressing, for example, the "send" key on the MS 101 as shown in step 5102. In the next step, feature validation decision step 5103, the NSP 106 determines whether the MS 101 user is authorized to use the conference call feature/function (i.e., the MS 101 user subscribes for the feature), and if so, notifies the VAP 103 to go forward with the conference call set up. However, if the MS 101 user is not authorized to use the conference call feature/function, the NSP 106 will return the MS 101 user to the two-way call in progress state at step 5101. Upon returning to step 5101 an announcement may be played to MS 101 user indicating that the conference call feature/function is not available and information on how to subscribe for the service.

After the VAP 103 is instructed by the NSP 106 to proceed with the conference call setup, the VAP 103 initiates, for example, a three-way call by first instituting a second call reference (CR=2) at step 5104 and places the first call, first call reference (CR=1), on hold. Next, at decision step 5105, the VAP 103 determines if the third party is being alerted. If so, the VAP 103 then waits to see if the third party answers. If not, VAP 103 disconnects / releases call reference 2 in step 5209 (See Fig. 52) and awaits the MS 101 user input, by

pressing for example the "send" key, to determine if the original call is retrieved (steps 5203 and 5205) or if the original call is also dropped (step 5204). If the MS 101 user presses the process initiation key again between initiating the three-way call at step 5104 and providing the third party an alert at step 5105, the input is ignored.

5           At decision step 5106 the VAP 103 determines if the third party has been connected to the MS 101 user and has answered. If so, the MS 101 and the third party are connected by the LDS 104 with a voice path for the second call reference (CR=2) at step 5107. If not, the VAP 103 disconnects / releases the third party (CR=2) at step 5209 and awaits MS 101 user input by, for example the MS 101 user pressing the "send" button, to attempt to retrieve  
10   the second party from hold to re-establish the original two-way call at step 5205 (See Fig. 52) or release all resources at step 5204. If possible, the VAP 103 reconnects the MS 101 user with the second party that was placed on hold and thus re-establishes the two-way call in progress at step 5205. If the VAP can not retrieve the second party it releases all resources at step 5204.

15           If the MS 101 user presses the conference call initiation key, for example the "send" key, twice between steps 5105 and 5106 before the third party answers, the VAP 104 will disconnect the third party, attempt to retrieve the second party, and re-establish a two-way call in progress, as indicated at steps 5201-5205. However, if the MS 101 user presses the conference call initiation key, for example the "send" key, once between step 5105 and 5106  
20   the input will be ignored.

Once the MS 101 user is connected in a two-way voice path with the third party the MS 101 user may enter a code message, by pressing at any time, for example the "send" button to enter the process initiate button, as indicated at step 5108. This will retrieve the

second party and connect them to the existing voice path between the MS 101 and the third party so that a three-way call is in progress as indicated at steps 5109 and 5110. If the MS 101 user does not enter a code message by, for example, pressing the “send” button or the second party can not be retrieved, the LDS 104 will leave the MS 101 user connected with the third party at step 5107. Further, if the MS 101 user enters a code message by pressing, for example, the “send” button again before the three-way call is established, the input will be ignored. On the other hand, if the MS 101 user enters a different code message by, for example, pressing the conference call initiation key, e.g., the “send” key twice after the three-way call has been established, as indicated at step 5206, the NSP 106 will instruct the VAP 103 to drop the third party as indicated in step 5207. Next, the VAP 103 will retain the MS 101 user and the second party in a two-way call as indicated in step 5208. If the MS 101 user enters a code message by pressing, e.g., the conference call initiation key, for example the “send” key, only once after the three-way call has been established, it will be ignored.

An embodiment of the conference call feature/function of the present invention illustrating an exemplary three-way call signal flow is shown in Figure 53. A successful conference call setup procedure has in general four basic steps. These general steps are: (1) establishing a first active call between an MS 101 user and a second party (or parties); (2) placing the active call between the MS 101 user and the second party (or parties) on hold; (3) establishing a second active call between the MS 101 user and a party to be added, e.g., a third party; and (4) re-connecting the second party on hold to the second active call. A detailed discussion of the signal flow for achieving each of these steps and more specific

steps of a successful conference call process follows for an exemplary embodiment using a three party conference call as an example.

First, the MS 101 user is a party to an active call with a party having a PSTN DN1 125a indicated as Call in progress (CR=1) 5301. When the MS 101 user wants to set up a  
5 three-way conference call with another PSTN user, PSTN DN2 125b (whose DN is herein referred to as ThreeWayDN), the MS 101 user enters the conference call feature code, for example “\*33#” and the party to be added DN digits in the format of \*33#ThreeWayDN and presses, for example, the “send” button on MS 101. The MS 101 sends to VAP 103 an IS-136 Send Burst DTMF message for each digit pressed. In the conference call procedure, the  
10 VAP 103 is responsible for receiving and buffering the digits, i.e. \*33#ThreeWayDN, generated by the MS 101 in the form of IS-136 Send Burst DTMF messages. By pressing the “send” button, the MS 101 generates an IS-136 Flash With Info message which initiates packing of the previously depressed digits, so that the VAP 103 construes as one message the string of digits sequentially input earlier, i.e., the IS-136 Send Burst DTMF  
15 [\*33#ThreeWayDN] 5302 message. Upon receiving each IS-136 Send Burst DTMF message from the MS 101, the VAP 103 sends an IS-136 Send Burst DTMF ACK 5303 message to the MS 101.

The IS-136 Send Burst DTMF 5302 messages include data fields such as: Protocol Discriminator, Message Type, Request number (DN), and Digit. The IS-136 Send Burst  
20 DTMF ACK 5303 message includes data fields such as Protocol Discriminator, Message Type, Request number (DN), Remaining Length, and Last Decoded Parameter.

The MS 101 user initiates a conference call feature/function by entering a command, for example, by pressing the “send” key on the MS 101, which results in a IS-136 Flash with

Info 5304 message being sent from the MS 101 to the VAP 103. After receiving the Flash With Info 5304 message, the VAP 103 acknowledges receipt by sending Flash With Info Ack 5306 message to the MS 101 and requests initiation of a conference call feature/function setup procedure by sending a novel Feature Request [\*33#ThreeWayDN] 5305 message including the buffered digits \*33#ThreeWayDN, to the NSP 106.

Upon receiving the Feature Request message from the VAP 103, the NSP 106 searches the WCSD in, for example memory 1240, and verifies that the MS 101 user has subscribed to the conference call feature, that the three-way call feature (assuming an LDS 104 has a three-way switch), and that the MS 101 user is not active on another three-way call initiated by him. The NSP 106 then sends a unique Feature Request ACK message, Feature Request ACK [3-Way, ThreeWayDN] 5307 message, containing the 3-Way as the action and the ThreeWayDN as the CalledDN. It also starts the T31 timer that will wait for the 3-Way Proceeding [success] 5324 message. In the situation where the MS 101 is authorized for the conference call capability and the LDS 104 has sufficient switch capacity to add another party to the conference call, the VAP 103 will play an announcement (or tone) to the MS 101 informing the MS 101 user (and optionally all parties to the conference call) that the conference call setup has been initiated, for example, Voice Prompt (3-way call initiated) 5308. On the other hand, if the MS 101 user who initiates the conference call is not authorized to make a three-way call, the NSP 106 sends a Feature Request ACK message with the action as Invalid 3-Way, so as to trigger an indication to the MS 101 user that the conference call feature/function is not available to them and the normal 2-way call will remain in progress. In either case, the VAP 103 may play the appropriate taped or voice synthesis generated announcement using, for example, the VPU 1235, or alternatively

generates a tone to the MS 101 user and optionally to the PSTN DN1 125a or the MS 101 may display a text message, as the indication of status.

Then the VAP 103 sends a Q.931 Info [CR=1,FA=Conf] 5309 message with the Feature Activation set to conference call to the LDS 104 to initiate a three-way conference call, updates a record to identify that this is a three-way call, and starts the T32 timer  
5 awaiting a response from the LDS 104. The LDS 104 acknowledges by sending a Q.931 Info [CR=1,FI=Conf,Active] 5310 message with the Feature Indication set to an active conference call and the VAP 103 cancels the T32 time.

At this point, the WCS begins a procedure to place the first call between the MS 101 user and the 2nd party at PSTN DN1 125a on hold to allow connection between the MS 101 user and a 3rd party on another line. Once the VAP 104 gets a Q.931 Info message from the LDS 104 it cancels the T32 timer, sends a Q.932 Hold [CR=1] 5311 message to the LDS 104 instructing the LDS 104 to place the existing call with PSTN DN1 125a on hold, and starts a THh timer. However, if the T32 expires, the VAP 103 will log an error and send a  
15 3-Way Proceeding message as fail to the NSP 106 with the cause value indicating that 3-way call could not be initiated. The NSP 106 and VAP 103 will update the call record information to indicate that the normal 2-way call is now in progress.

If the T32 time does not expire, the LDS 104 puts the first leg of the call on hold, i.e., proceeds to place the voice path with PSTN DN1 125a on hold, and sends a Q.931 Hold  
20 Ack [CR=1] 5312 message to the VAP 103 indicating that the first active call has been placed on hold. The VAP 103 cancels timer THh and sends a Q.931 Setup [CR=2, ThreeWayDN] 5313 message to the LDS 104, including the second call reference number (CR=2) and the ThreeWayDN, to setup the conference call to the third party [CR=2] on the

same B-channel. However, if the timer THh expires, the VAP 103 will log an error and send a 3-Way Proceeding 5316 message as fail to the NSP 106 with the cause value indicating that 3-way call could not be held. The VAP 103 and NSP 106 will update the call record information to indicate that the normal 2-way call is now in progress.

5 If timer THh does not expire, the VAP 103 updates the information about this call in the appropriate record to identify that a 3-Way call is being established and starts the T303 timer awaiting a Q.931 Call Proceeding 5316 message from the LDS 104. Thus, the first referenced call (CR=1) is now held by the LDS 104 awaiting the connection of MS 101 with other parties (Call Held by LDS (CR=1) 5315. The NSP 106 updates the information about  
10 this call in the appropriate record in the WCSD of, for example, in the memory 1240.

When the first call between the MS 101 user and the second party, PSTN DN1 125a has been put on hold the WCS then continues with the conference call setup procedure by performing a call setup between the MS 101 and a party to be added to the conference call, for example, a third party at PSTN DN2 125b. First, the LDS 104 processes the Q.931  
15 Setup [CR=2, ThreeWayDN] 5313 message and sends a Q.931 Call Proceeding 5316 message to the VAP 103 indicating to the VAP 103 that the call to PSTN DN1 125b is being initiated. Once the VAP 103 receives a Q.931 Call Proceeding 5316 message from the LDS 104, it cancels the T303 timer and starts T310 timer waiting for Q.931 Alerting 5319 message from the LDS 104. The VAP 103 does not have to do anything on the RF side  
20 because the MS 101 is already on the DTC. However, if the timer T303 expires, the VAP 103 will send a novel 3-Way Proceeding 5324 message as "fail" to the NSP 106 with a proper cause value. It will also send a Q.931 Release Complete [CR=2] 5330 message to the LDS 104. After this the VAP 103 will start a timer T34 waiting for a Flash with Info



message from the MS 101 (this would indicate that the mobile wants to retrieve the original call).

Next, the LDS 104 sends an initial address message, ISUP IAM 5317, to the ThreeWayDN, in this example another PSTN LDS, PSTN DN2 125b. In response, the

5 PSTN DN2 125b sends an address complete message, ISUP ACM 5318, to indicate that a communication link has been made with PSTN DN2 125b. Next, the LDS 104 sends a Q.931 Alerting 5319 message to the VAP 103 so that the VAP 103 and LDS 104 can provide MS 101 Ringback Tone 5320 indicating that PSTN DN2 125b is being alerted of an incoming call. When the VAP 103 receives a Q.931 Alerting 5319 message from the LDS

10 104, it cancels the timer T310 and starts T301 timer waiting for Q.931 Connect 5322 message from the LDS 104. However, if the timer T310 expires, the VAP 103 will follow disconnect procedure by sending Q.931 Disconnect (CR=2) message to the LDS 104. The LDS 104 will respond with Release (CR=2) 5329 message. The VAP 103 will continue to follow the same procedure as above; the VAP 103 will also send a Q.931 Release Complete

15 [CR=2] 5330 message to the LDS 104. After this the VAP 103 will start a timer T34 waiting for a Flash with Info message from the MS 101 (this would indicate that the mobile wants to retrieve the original call).

When the third party at PSTN DN2 125b answers the call an answer message, ISUP ANM 5321, is sent from PSTN DN2 125b to LDS 104. In response, the LDS 104 sends a

20 Q.931 Connect 5322 message to the VAP 103. When the VAP 103 gets the Q.931 Connect 5322 message from the LDS 104, it recognizes that this message corresponds to a three-way call and cancels the T301 timer. If the timer T310 expires, the VAP 103 will follow disconnect procedure by sending Q.931 Disconnect (CR=2) message to the LDS 104. The

LDS 104 will respond with Release (CR=2) 5329 message. The VAP 103 will continue to follow the same procedure as above; the VAP 103 will also send a Q.931 Release Complete [CR=2] 5330 message to the LDS 104. After this the VAP 103 will start a timer T34 waiting for a Flash with Info message from the MS 101. Otherwise, the VAP 103 then  
5 sends a Q.931 Connect ACK 5323 message to the LDS 104 acknowledging the second call connection has been made between the MS 101 and PSTN DN2 125b and starts a T34 timer. (The voice path of the second call is illustrated in Fig. 53 as dashed arrow lines labeled Call in progress (CR=2) 5414 from the PSTN DN2 125b to MS 101.)

Once the voice path has been established the VAP 103 sends a novel 3-Way  
10 Proceeding [success] 5324 message to the NSP 106 indicating that the third party has been successfully added to the conference call by completing the second call between MS 101 and PSTN DN2 125b. This message includes the MSID, the Call Reference Number (CR=2), and the Cause (Success/Fail) fields. (The cause field in the 3-Way Proceeding message may contain the comments, for example: 3rd party answered (success), 3-way call  
15 hold fail, 3-way call initiate fail, or 3rd party did not answer.) At this point, establishing a second call between the party to be added, in this case a third party, has been completed and thus the MS 101 for the conference call setup procedure is complete with the exception of a few administrative details to be performed by the NSP 106.

When the NSP 106 gets a 3-Way Proceeding [success] 5324 message it updates the  
20 information about this call in the appropriate record in the WCSD to, among other things, capture the call usage time for the new leg of the call. The NSP 106 cancels the T31 timer, updates the call record information and starts the T36 timer that waits for the 3-way Result [success] 5433 message from the VAP 103 indicating that the conference call setup has been

completed successfully. However, if the second call to the third party is not connected for whatever reason, for example, the T31 timer expires and/or the NSP 106 receives 3rd Party Answered message as a "fail", the NSP 106 will send a 3-Way Disconnect message to the VAP 103 to disconnect the attempted connection with the third party, retrieve the original  
5 call with PSTN DN1 which was placed on hold (as discussed in more detail below), and update the call information record to indicate that a normal 2-way call is now in progress.

If the MS 101 user had requested to set up a conference call by adding another MS 101 rather than the PSTN DN2 125b, the call setup procedure would have followed the sequence described in other areas of the invention for call setup from one MS 101 to another  
10 MS 101 in the WCS.

Next, the conference call setup procedure connects the original call with the second party at PSTN DN1 125a on hold with the active call between MS 101 and the third party at PSTN DN2 125b. If the MS 101 user once again inputs the initiation code, for example by pressing the "send" button once, an IS-136 Flash with Info 5325 message is sent to the VAP  
15 103 requesting that the second party on hold be added to the two-way call between the MS 101 user and the third party. The VAP 103 cancels the T34 timer, sends a Q.932 Retrieve [CR=1] 5326 message to the LDS 104 indicating that the MS 101 user has requested that the call on hold be retrieve so that it and the active call be combined to form, in this case, a three way conference call, starts the TRr timer, and sends an IS-136 Flash with Info Ack 5327  
20 message to the MS 101. However, if the timer T34 expires, the VAP 103 will follow the Release procedure to release CR=1 and send 3-Way Result as fail to the NSP 106. A 2-Way call with third party would continue.

When the LDS 104 receives the Q.932 Retrieve [CR=1] 5326 message from the VAP 103 (after the third party has answered), it verifies that the original called party, in this case the second party, is still present on hold, and sends a Retrieve Ack 5328 message to the VAP 103 indicating that the original call on hold has been retrieved. The LDS 104 then  
5 merges the calls, CR=2 with CR=1. When the VAP 103 receives Q.932 Retrieve Ack [CR=1] message from the LDS 106, it will stop the TRr timer and start T35 timer.

However, if the timer TRr expires as a result of the VAP 103 not receiving the Q.932 Retrieve Ack 5327 message because, for example, the second party hangs up or is some way disconnected, the VAP 103 will log an error and send a 3-way Result message as fail to the  
10 NSP 106 and the 2-way call [CR=2] with the third party will continue. In the case of such a failure to retrieve the first call placed on hold, the VAP 103 may also play a voice prompt to the MS 101 user indicating that the 3-way call could not be completed.

After merging the two legs of the call, CR=1 and CR=2, the LDS 104 sends a Q.931 Release [CR=2] 5329 message to the VAP 103 to release the second call reference (CR=2)  
15 while retaining the three (or more) parties on the conference call. Then VAP 103 cancels timer T35 and releases (clears) the second call reference CR=2 and sends a Q.931 Release Complete [CR=2] 5330 to the LDS 104. However, if the timer T35 expires, the VAP 103 will log an error. The 3-way call is in progress so the VAP 103 will send a Q.931 Release [CR=2] 5329 message to the LDS 104 to release the second call reference. Once the VAP  
20 103 gets a Q.931 Release Complete [CR=2] 5330 message from the LDS, it will send a 3-way Result [success] 5331 message to the NSP 106.

In any case, the VAP 103 sends a novel 3-Way Result [success] 5331 message to the NSP 106 indicating that the release of CR=2 is successful. The 3-Way Result message

includes MSID, Call Reference Number, and Cause fields. Then the NSP 106 cancels the timer T36 and updates the call record information to indicate successful setup of a conference call, in this case a three-way call, and that the conference call is now in progress (indicated as the dashed arrows labeled (3-Way Call In-Progress (CR=1) 5332).

5           However, if the NSP 106 receives a 3-Way Result message from the VAP 103 indicating a "fail", the NSP 106 will cancel the T36 timer and update the call record information to indicate that the normal 2-way call [CR=2] is in progress. If the T36 timer expires, the NSP 106 will initiate a Release procedure on CR=2. In either case, the NSP 106 may send a Play Voice Prompt message to the VAP 103 to inform the user that the  
10       conference call could not be completed and a two-way call will continue. Further, if any party disconnects during the establishment of a three-way call, the NSP 106 will get a WCS specific Release message. Then the NSP 106 will update its call record information and resource table accordingly.

15           In some circumstances, although the third party may answer, the equipment may fail to be able to connect the third party to the original call. In such a case, the WCS will need to notify the MS 101 user and the MS 101 user may wish to retrieve the original call. Figure 54 below gives the signal flow for one exemplary embodiment when the third party could not be connected.

20           The signal flow in the case where the third party could not be connected to the conference call is essentially the same as described for Figure 53 up to the point where the VAP 103 sends 3-Way Proceeding [success] 5324 message. In general, the original call, call reference 1, is placed on hold by the LDS, Call Held by LDS(CR=1) 5315 message. Subsequently, the third party line PSTN DN2 125b sends an ISUP ACM 5318 message to

the LDS 104. In response the LDS provides a Q.931 Alerting 5319 message to the VAP 103 and a Ringback Tone 5320 to the MS 101. However, in the case where the third party could not be connected to the conference call, the 3-Way Proceeding message from the VAP 103 results in a "fail" message being sent to the NSP 106, i.e., 3-Way Proceeding [fail]

5 5452.

After sending 3-Way Proceeding [fail] 5452 message, the VAP will start a timer T34 waiting for Flash with Info message from the mobile and provide an indication to the MS 101 user that the third party can not be connected. For example, the MS 101 use may receive a Voice Prompt: Can not connect 3rd Party 5453 or a similar text message, which prompts the MS 101 user to respond accordingly. If the MS 101 user enters the initiation code, for example, by pressing the "send" key, the VAP 103 will be sent a IS-136 Flash with Info 5454 message from the MS 101. The VAP 103 will cancel timer T34, send a Q.931 Retrieve [CR=1] 5455 message to the LDS 104 to re-connect with the original call, send and IS-136 Flash with Info Ack [CR=1] 5456 message to the MS 101, and start timer TRr.

15 However, if the timer T34 expires, the VAP 103 will follow a disconnect procedure and send a WCS Release message to the NSP 106 so that all calls are disconnected and all resources released. If the time T34 does not expire, the LDS responds with Q.931 Retrieve ACK [CR=1] 5457 message and the VAP 103 will cancel the TRr timer and update its call record to reflect that the original call has been received and the conference call latest attempt to add a party has been cancelled. The WCS will establish the original call, for example, 2-Way Call in Progress(CR=1) 5458. On the other hand, if the timer TRr expires, the VAP 103 will release RF resources, clear the call reference on its side, send a Q.931 Release [CR=1] message to the LDS 104. Once the VAP 103 receives Q.931 Release Complete

message from the LDS 104, it will send a WCS Release message to the NSP 106 with a proper cause value.

In some instances the MS 101 user may wish to retrieve the original call with the 2nd party before a conference call, e.g., a three way call, is established. Figure 55 depicts the signal flow for the scenario when the MS 101 user wants to retrieve the original call with the second party before the third party answers. To do so, the MS 101 user can enter the feature initiation code twice, for example, he may press the “send” button twice in certain scenarios. In particular, if the original call with the second party is on hold and the third party has not yet answered the incoming call, the conference call setup procedure can be easily cancelled by, for example, the MS 101 user entering the feature initiation code twice within a short period of time, e.g., pressing the “send” button twice within for example, approximately one – two seconds. Upon canceling the conference call the ongoing connection to the party to be added, e.g., the third party, will be disconnected and the party(ies) of the original call, e.g., the second party, will be retrieved. A detailed discussion of the signal flow for retrieving an original call on hold before a conference call is established follows, using a three-way conference call as an example.

Assuming that the conference call has been initiated and the third party is being alerted, in essence, the conference call setup procedure has progressed successfully in the normal manner to the point where the original call to the second party is on hold (signals Call Held by LDS (CR=1) 5315, and Q.931 Call Proceeding 5316 already complete) and the party to be added to the conference call is being alerted of an incoming call (ISUP IAM 5317 already complete), if the MS 101 user enters a feature initiation code twice within a short period of time, e.g., within a 1 to 2 seconds, e.g., presses the “send” button twice, the

MS 101 will send the VAP 103 two IS-136 Flash With Info 5502 and 5504 messages sequentially. In response, VAP 103 send two IS-136 Flash with Info ACK 5503 and 5505 messages sequentially to the MS 101.

When the VAP 103 gets the first IS-136 Flash with Info 5502 message from the mobile, the VAP 103 checks the call information record to determines that this is a three-way call, that the third party has not answered, that the original call with the second party is in a held state, and starts the T37 timer, awaiting another IS-136 Flash with Info message, IS-136 Flash with Info 5504 message. If the timer T37 expires, the VAP 103 will ignore the first Flash with Info message. Otherwise, the VAP 103 gets the second IS-136 Flash with Info message, IS-136 Flash with Info 5504 message from the MS 101, cancels the T37 timer, and sends an IS-136 Flash with Info Ack 5505 message to the MS 101. The VAP 103 also determines that this is a request to disconnect the ongoing conference call connection and retrieve the original call. So the VAP 103 then sends a Q.931 Disconnect [CR=2] 5506 message to the LDS 104 and starts a T305 timer.

The VAP 103 sends a Q.931 Disconnect [CR=2] 5506 message to the LDS 104 instructing it to disconnect the call setup to the party to be added, e.g., the third party. The LDS 104 then sends release messages, ISUP REL 5507 message to PSTN DN2 125b and Q.931 Release [CR=2] 5508 message to the VAP 103, to terminate the call setup in mid-process. PSTN DN2 125b responds by releasing the call setup and sending a confirmation to the LDS 104, the ISUP RLC 5509 message. Once the VAP 103 gets a Q.931 Release [CR=2] 5508 message from the LDS 104, it cancels the T305 timer, sends a Q.931 Release Complete[CR=2] 5510 message to the LDS 104 followed by Q.932 Retrieve [CR=1] 5511 message to the LDS 104 and waits for Q.932 Retrieve Ack 5513 message from the LDS



104. However, if the T305 timer expires, the VAP 103 logs an error, releases CR=2 at its end, sends a Q.931 Release Complete 5510 message to the LDS 104 and continues.

When the call to the party to be added is released, the VAP 103 proceeds to retrieve the original call to the second party from hold and reconnect the call between the MS 101  
5 user and the second party on the PSTN DN1 125a. To do so, the VAP 103 sends the Q.932 Retrieve [CR=1] 5511 message to the LDS 104 so that the LDS will retrieve the call on hold and starts the TRr timer. The LDS 104 responds to the VAP 103 with a Q.932 Retrieve Ack 5513 message and re-establishes the original call between the original parties to the conference call, e.g., the second party and the MS 101 user as illustrated by the dotted line  
10 with arrows labeled 2-Way Call in Progress(CR=1) 5512. However, if the timer TRr expires and the VAP 103 does not get Q.932 Retrieve Ack 5513 message from the LDS 104, it will release all the resources. The VAP 103 will also clear the call reference (CR=1) on its side and send a Q.931 Release message to the LDS 104. Once the VAP 103 gets Q.931 Release ACK message from LDS 104, it will then send a WCS Release message to the NSP 106  
15 with a proper cause value (2<sup>nd</sup> party could not be retrieved) and the air interface usage for the call.

When the VAP 103 gets the Q.931 Retrieve Ack 5513 message from the LDS 104, it sends a novel 3-Way Release [3rd Party not Answered] 5514 message to the NSP 106. This novel WCS 3-Way Release message includes fields for MSID, Call Reference Number, and  
20 Cause (3rd Party not Answered/3rd party dropped). When the NSP 106 receives 3-Way Release [3<sup>rd</sup> party not answered] 5514 message from the VAP 103, it updates its call record information in the WCSD to say that only 2-way call is now in progress. If the NSP 106

receives a WCS Release message from the VAP 103, the NSP 106 will update its call record to capture call usage information.

**B. Deleting A Party From An Existing Call**

5 The WCS provides the feature/function to allow an MS 101 user to delete (drop) a party from an active conference call. Once a conference call has been established, an MS 101 user may enter delete a party feature/function code in the MS 101 which will trigger a party to be dropped from the conference call.

For ease of explanation and convenience, an exemplary embodiment is provided  
10 below for a situation in which an MS 101 user drops the last added party from a three way conference call between an MS 101 user and two parties using PSTN telephones. However, one skilled in the art would recognize that the present invention also similarly covers scenarios where the conference call includes more than three people and the MS 101 user desires to delete (drop) a party other than the last added party. In such a case the delete a  
15 party feature/function message may also include, for example, a deactivation code and a directory number indicating the party to be deleted.

Referring now to Figure 56, a preferred embodiment is illustrated having signal flow for a situation when an MS 101 user drops the last added party from a three party conference call initiated by the MS 101 user, i.e., deleting (dropping) the third party during and active  
20 three-way call. In this case, the MS user enters a delete last party message, for example entering a conference call feature/function message by pressing the "send" button twice, to thereby drop the last added call during a three-way call.

While a three-way call is in progress, 3-Way Call In-Progress (CR=1) 5601, the MS 101 user decides to delete (drop) the last party added, PSTN DN2 125b, from the active conference call. To achieve this, the MS 101 user may, for example, enter the conference call feature/function message by pressing the "send" button twice within a certain period of time (e.g., a few seconds). This sequence will indicate to the VAP 103 that the MS 101 user wishes to delete (drop) a party from a conference call, e.g., PSTN DN2 125b.

In one example, the VAP 103 receives the first of two feature/function initiation codes, IS-136 Flash with Info 5602 message, from the MS 101. The VAP 103 checks the call information record to determine that a three-way active conference call is in progress.

The VAP 103 starts a T37 timer awaiting another IS-136 Flash With Info message and sends an IS-136 Flash With Info Ack 5603 message back to the MS 101, indicating receipt of the earlier sent IS-136 Flash With Info 5602 message. If the VAP 103 gets another IS-136 Flash With Info message before the T37 timer times out (e.g., within a few seconds), IS-136 Flash With Info 5604 message from the MS 101, the VAP 103 determines that this is a request to drop the last added party. In another embodiment the Flash With Info Message could be preceded by the conference call feature function deactivation code and the DN to be dropped. This process would include a query of the NSP 106 for instructions as to which line to drop. In any case, if the timer T37 expires, the VAP will ignore the first Flash with Info message.

Assuming the MS 101 has entered two Flash With Info messages before the T37 timer times out, the VAP 103 determines that a three-way call is in progress and that this is a request to drop the last added party. Thus, the VAP 103 sends a Q.931 Info [CR=1, Drop]

5606 message to the LDS 104 requesting it to disconnect, for example, the last added party of the three-way call (CR=1).

The LDS 104 then initiates the Release process with PSTN DN2 125b by sending an ISUP REL 5607 message to the PSTN DN2 125b. After sending a Q.931 Info [CR=1, Drop]

5 message to the LDS 104, the VAP 103 sends a 3-Way Release [3rd party dropped] 5610 message with cause value as 3<sup>rd</sup> party dropped to the NSP 106. The LDS 104 may send back a Q.931 Info [CR=1, Conf. Display Info] 5609 message to the VAP 103 informing the VAP 103 that the last added call has been dropped. However, the VAP 103 does not have to wait for the Q.931 Info [CR=1, Conf Display Info] 5609 message and will ignore it when it  
10 gets this message if the VAP 103 has already sent the 3-Way Release [3rd party dropped] 5610 message. In any case, the VAP 103 will send a 3-Way Release [3rd party dropped] 5610 message to the NSP 106 and releases the last added party to the conference call. When the NSP 106 receives 3-Way Release message from the VAP 103, it will update the call record information to say that 2-Way call is now in progress, 2-Way Call In Progress 5611,  
15 between PSTN DN1 125a and MS 101.

In another embodiment the VAP 103 may play an announcement to one or more party (ies) of the conference call indicating that a party is being dropped from the active conference call.

Although particular embodiments of the present invention have been shown and  
20 described, it will be understood that it is not intended to limit the invention to the preferred embodiments and it will be obvious to those skilled in the art that various changes and modifications may be made without departing from the spirit and scope of the present invention. Thus, the invention is intended to cover alternatives, modifications, and

## Patent Application

equivalents, which may be included within the spirit and scope of the invention as defined by the claims.

For example, while the IS-136 standard is used to illustrate the invention in various embodiments described herein, the invention is not limited to use in the IS-136 standard.

5 The invention is also applicable to other cellular and/or PCS systems. Furthermore, while the access methodology employed by the various embodiments of the instant invention involves the use of a Time Division Multiplexing Access (TDMA) scheme, the general concepts disclosed herein are not limited to the TDMA IS-136 standard. The concepts are applicable to other access methodologies such as, Frequency Division Multiple Access  
10 (FDMA), Code Division Multiple Access (CDMA), or other multiple access techniques. As a result, the use of TDMA IS-136 standard is used to enable the invention and is in no way intended to be a limitation of the invention.

The following applications are hereby incorporated by reference for all purposes:

1. U. S. Patent Application Ser. No. 09/223,316 by Chow et al. filed on December 30, 1998  
15 entitled Neighborhood Cordless Service Call Handoff (Attorney Docket 3493.77826);
2. U. S. Patent Application Ser. No. 09/223,321 by Chow et al. filed on December 30, 1998  
entitled Automatic Service Selection Feature for Neighborhood Cordless Service  
(Attorney Docket 3493.77824);
3. U. S. Patent Application Ser. No. 09/223,317 by Chow et al. filed on December 30, 1998  
20 entitled Method and Apparatus for Billing a Neighborhood Cordless Service (Attorney  
Docket 3493.77825);
4. U. S. Patent Application Ser. No. 09/223,318 by Chow et al. filed on December 30, 1998  
entitled Method and Apparatus for Over-the-Air Activation of Neighborhood Cordless  
Service (Attorney Docket 3493.77803);

## Patent Application

5. U. S. Patent Application Ser. No. 09/223,322 by Chow et al. filed on December 30, 1998  
entitled Method and Apparatus for Providing Neighborhood Residential Cordless  
Service (Attorney Docket 3493.75951);
6. U. S. Patent Application Ser. No. 09/223,320 by Chow et al. filed on December 30, 1998  
5 entitled Automatic Status Indicators For Neighborhood Cordless Service (Attorney  
Docket 3493.76142); and
7. U. S. Patent Application Ser. No. 09/224,724 by Chow et al. filed on December 31, 1998  
entitled Instantaneous Conference Initiation (Attorney Docket 3493.77827).

**We Claim:**

**I-VIII: Wireless Centrex Services**

- 1 1. A wireless network comprising:  
2 a plurality of remote cellular communication devices;  
3 a wireless cellular communication system compatible with the remote cellular  
4 communication devices; and  
5 an in-building wireless communication system compatible with the remote cellular  
6 communication devices.
- 1 2. The wireless network of claim 1, wherein the in-building wireless communication  
2 system is not connected to an central office switch.
- 1 3. The wireless network of claim 1, wherein the in-building wireless communication  
2 system is connected to a line switch.
- 1 4. The wireless network of claim 1, wherein the in-building wireless communication  
2 system can seamlessly transition a call to the wireless communication system
- 1 5. The wireless network of claim 1, wherein the wireless cellular communication  
2 system can seamlessly transition a call to the in-building wireless communication system.
- 1 6. A system comprising an in-building wireless communication network having a  
2 plurality of miniature base stations with real time adaptable gain.

1 7. A method for providing seamless communication between an in-building wireless  
2 communication system and a public cellular network.

1 8. A method comprising seamlessly communicating between a first in-building wireless  
2 system and a second public cellular system as a user moves from the first in-building  
3 wireless system to the second public cellular system.

1 9. A method comprising configuring a first in-building wireless system to seamlessly  
2 communicate with a public cellular system as the user moves from the first in-building  
3 wireless system to the public cellular system.

1 10. A method comprising configuring a plurality of in-building wireless system to  
2 dynamically adjust signal strength.

1 11. A method comprising configuring a plurality of in-building base stations to handoff a  
2 call without interruption to a public cellular system.

1 12. A method comprising configuring a public cellular system to handoff a call without  
2 interruption to one of a plurality of in-building base station.

1 13. A method comprising delivering and handing off a wireless call based on a  
2 predetermined triggered event.



1 14. The method of claim 13, wherein the triggered event is dependent on a subscriber  
2 profile entry.

1 15. The method of claim 13, wherein the triggered event causes a line switch to invoke a  
2 special call handling procedure.

1 16. The method of claim 13, wherein the triggered event requires an additional signaling  
2 from a mobile station in order to specifically determine the destination of the call.

1 17. The method of claim 13, wherein the call is delivered to a mobile station.

1 18. The method of claim 13, wherein the call is delivered to a desktop telephone.

1 19. The method of claim 13, wherein the call originated from a mobile station.

1 20. The method of claim 13, wherein the call originated from a desktop telephone.

1 21. A method comprising handing off a wireless call using advanced intelligent network  
2 call triggering.

1 22. The method of claim 21, wherein the wireless call is handed off from a public  
2 cellular network to an in-building wireless network.

1 23. The method of claim 21, wherein the wireless call is handed off from a public  
2 cellular network to a campus wireless network.

1 24. The method of claim 21, wherein the wireless call is handed off from a first in-  
2 building wireless network to a second in-building wireless network.

1 25. The method of claim 21, wherein the wireless call is handed off from a first campus  
2 wireless network to a second campus wireless network.

1 26. The method of claim 21, wherein the wireless call is handed off from one miniature  
2 base station to another miniature base station.

1 27. A method comprising, handing off a call from a desktop telephone to a mobile  
2 station.

1 28. The method of claim 27, wherein the mobile station is located in an in-building  
2 wireless system.

1 29. The method of claim 27, wherein the mobile station is located in a campus wireless  
2 system.

1 30. The method of claim 27, wherein the mobile station is located in a public cellular  
2 system.

1 31. A method comprising programming a directory number in a database causing the  
2 directory number to trigger a special event for call delivery and handoff.

1 32. A method comprising programming a database so a mobile station will cause a  
2 trigger that results in call delivery and handoff.

1 33. A method comprising configuring a wireless communication system to deliver and  
2 handoff a call based on a triggered event.

1 34. A method comprising configuring a wireless communication system to trigger an  
2 event that will result in call delivery and handoff.

1 35. A communication platform providing voice services to a wireless subscriber,  
2 comprising: at least one voice access port connected to a remote digital terminal via a first  
3 communications link;  
4 a local digital switch interconnected to the remote digital terminal via a second  
5 communication link; and  
6 a network server platform interconnected to the local digital switch.

## Patent Application

1 36. The communication platform of claim 35, wherein the first communication link is an  
2 integrated services digital network basic rate interface link.

1 37. The communication platform of claim 35, wherein the second communication link is  
2 a trunk interface.

1 38. The communication platform of claim 35, wherein the voice access port is  
2 interconnected to said local digital switch via a remote digital terminal.

1 39. The communication platform of claim 35, wherein the network server platform is  
2 interconnected to the local digital switch via a first and a second communication link.

1 40. The communication platform of claim 39, wherein the first communication link  
2 interconnecting the network server platform with the local digital switch an packetized  
3 communication link.

1 41. The communication platform of claim 39, wherein the second communication link  
2 interconnecting the network server platform with the local digital switch an signaling  
3 communication link.

1 42. A communication platform providing data services to a wireless subscriber,  
2 comprising: at least one data access port connected to a controller via a first communications  
3 link; a local digital switch interconnected to the controller; and

4 a network server platform interconnected to the local digital switch.

1 43. The communication platform of claim 42, wherein the first communication link is an  
2 integrated services digital network primary rate interface link.

1 44. The communication platform of claim 42, wherein the data access port is  
2 interconnected to said local digital switch.

1 45. The communication platform of claim 42, wherein the network server platform is  
2 interconnected to the local digital switch via a first and a second communication link.

1 46. The communication platform of claim 45, wherein the first communication link  
2 interconnecting the network server platform with the local digital switch is a packetized  
3 communication link.

1 47. The communication platform of claim 45, wherein the second communication link  
2 interconnecting the network server platform with the local digital switch is a signaling  
3 communication link.

1 48. A wireless network comprising:  
2 a plurality of remote cellular communication devices;  
3 a wireless cellular communication system compatible with the remote cellular  
4 communication devices; and

a campus wireless communication system compatible with the remote cellular communication devices.

49. The wireless network of claim 48, wherein the campus wireless communication system is not connected to an central office switch.

50. The wireless network of claim 48, wherein the campus wireless communication system is connected to a line switch.

51. The wireless network of claim 48, wherein the campus wireless communication system can seamlessly transition a call to the wireless communication system.

52. The wireless network of claim 48, wherein the wireless cellular communication system can seamlessly transition a call to the campus wireless communication system.

53. A system comprising a campus wireless communication network having a plurality of miniature base stations with real time adaptable gain.

54. A method for providing seamless communication between a campus wireless communication system and a public cellular network.

1 55. A method comprising seamlessly communicating between a first campus wireless  
2 system and a second public cellular system as the user moves from the first campus wireless  
3 system to the second public cellular system.

1 56. A method comprising configuring a first campus wireless system to seamlessly  
2 communicate with a public cellular system as the user moves from the first in-building  
3 wireless system to the public cellular system.

1 57. A method comprising configuring a plurality of campus wireless miniature base  
2 stations dynamically adjust signal strength.

1 58. The method of claim 57, wherein the base stations dynamically adjust the signal  
2 amongst other base stations.

1 59. The method of claim 57, wherein the base stations dynamically adjust the signal  
2 strength amongst at least one of a plurality of mobile stations.

1 60. The method of claim 57, wherein the base station dynamically adjust the signal  
2 strength amongst at least one of a plurality of base stations in a public cellular network.

1 61. A method comprising configuring a plurality of campus wireless base stations to  
2 handoff a call without interruption to a public cellular system.

1 62. A method comprising configuring a public cellular system to handoff a call without  
2 interruption to one of a plurality of campus wireless base station.

1 63. A communication platform providing integrated wireless voice and wireless data  
2 services comprising:  
3 a plurality of remote cellular communications device:  
4 a first wireless cellular communication system compatible with the remote cellular  
5 communications devices: and  
6 a second wireless communication system compatible with the first remote cellular  
7 communication devices.

1 64. The communication platform of claim 63, wherein the remote cellular  
2 communication devices can singularly handle voice communications.

1 65. The communication platform of claim 63, wherein the remote cellular  
2 communication devices can singularly handle data communications.

1 66. The communication platform of claim 63, wherein the remote cellular  
2 communication devices have integrated data and voice communications capabilities.

1 67. The communication platform of claim 63, wherein the second wireless  
2 communication system is an in-building wireless system.



68. The communications platform of claim 63, wherein the second wireless communication system is a campus wireless system.

69. The communication platform of claim 63, wherein the remote cellular communication devices can seamlessly communicate between the first and the second communications network.

70. The communications platform of claim 63, wherein the remote cellular communication devices can communicate without interruption as the devices move from the first communication system to the second communication system.

#### IX. Feature Activation/Deactivation

1. A system for handling feature/function activation/deactivation from a mobile station in a wireless centrex system, comprising:

a local digital switch for routing communications between said mobile station and another communication device;

an intelligent server coupled to said local digital switch for determining a location of the mobile station and receiving and processing a feature activation/deactivation code message received from said mobile station to activate/deactivate a particular feature/function for handling communications with said mobile station; and

an intelligent transceiver for communicating with said mobile station via airwaves, said intelligent transceiver located in an area remote from said local digital switch.

1 2. The system according to claim 1, wherein said processing a feature activation code  
2 includes verifying said mobile station is authorized to use a requested feature.

1 3. The system according to claim 2, wherein said processing a feature  
2 activation/deactivation code includes activating a feature/function according to said feature  
3 activation code received by said intelligent server.

1 4. The system according to claim 3, wherein said intelligent transceiver is a voice  
2 access port and said intelligent server is a network server platform.

1 5. The system according to claim 4, further comprising:  
2 a database for maintaining a service profile of said mobile station;  
3 a memory for storing said database; and  
4 a controller for evaluating said service profile of said mobile station.

1 6. The system according to claim 5, further comprising a remote digital terminal  
2 connected to said local digital switch and said voice access port.

1 7. The system according to claim 1, wherein said intelligent server receives a  
2 deactivation code and verifies that the requested feature/function to be deactivated is active.

8. The system according to claim 7, wherein said intelligent server deactivates an active feature/function and removes associated feature/function information from a service profile of said mobile station.

9. A method for handling feature/function activation/deactivation from a mobile station, comprising the step of:

- routing communications between said mobile station and another communication device with a local digital switch;
- determining a location of the mobile station with an intelligent server coupled to said local digital switch;
- receiving and processing a feature activation/deactivation code message received from a mobile station using said intelligent server so as to activate/deactivate a particular feature/function for handling communications with said mobile station; and
- communicating with said mobile station via air waves using an intelligent transceiver, said intelligent transceiver located in an area remote from said local digital switch.

10. The method according to claim 9, further comprising the step of verifying said mobile station is authorized to use a requested feature/function.

11. The method according to claim 10, further comprises the step of activating a feature/function according to said feature activation/deactivation code received by said intelligent server.

1 12. The method according to claim 11, wherein said intelligent transceiver is a voice  
2 access port.

1 13. The method according to claim 9, further comprising the steps of:  
2 maintaining a service profile of said mobile station in a database;  
3 storing said database in memory; and  
4 evaluating said service profile of said mobile station with a controller to determine  
5 that said mobile station is authorized to use a requested feature/function and to  
6 activate/deactivate a feature/function according to said feature/function  
7 activation/deactivation code message received from said mobile station.

1 14. The method according to claim 13, wherein said local digital switch and said  
2 intelligent transceiver are connected to a remote digital terminal.

1 15. The method according to claim 11, further comprising the step of receiving a  
2 deactivation code and verifying that the requested feature/function to be deactivated is  
3 active.

1 16. The method according to claim 15, further comprising the step of deactivating an  
2 active feature/function and removing associated feature/function information from a service  
3 profile of said mobile station.

1 17. The method according to claim 16, further comprising the step of indicating to said  
2 mobile station a status of a requested feature/function activation/deactivation request using  
3 an Origination NACK message.

1 18. The method according to claim 16, further comprising the step of indicating to said  
2 mobile station a status of a requested feature/function activation/deactivation request using  
3 an IS-136 Reorder/Intercept message.

**X. Call Hold**

1 1. A system for handling a telephone call to a mobile station, comprising:  
2 a local digital switch, responsive to an incoming call, for creating a voice path  
3 between an origin of the incoming call and the local digital switch;  
4 a network server platform coupled to said local digital switch for determining a  
5 location of the mobile station called and sending a page message to the mobile station to  
6 activate an indicator that indicates the existence of said incoming call; and  
7 an intelligent radio transceiver for receiving a call hold request from said mobile  
8 station and placing said call on hold.

1 2. The system according to claim 1, further comprising:  
2 a digital signal processor for providing comfort noise to a voice channel of said call  
3 on hold.

1 3. The system according to claim 2, further comprising:

## Patent Application

2 a voice processing unit for providing an announcement to at least one party of said  
3 call on hold.

1 4. The system according to claim 3, wherein the announcement is provided to a calling  
2 party and an alert is provided to a called party to indicate that the call is on hold.

1 5. The system according to claim 4, wherein said announcement is provided repeatedly  
2 over time.

1 6. The system according to claim 5, wherein said intelligent radio transceiver is a voice  
2 access port.

1 7. The system according to claim 6, further comprising a remote digital terminal  
2 connected to said local digital switch and said voice access port.

1 8. The system according to claim 7, wherein said network service platform further  
2 comprises:

3 a memory for storing information related to a profile of the mobile station; and

4 a controller, responsive to said local digital switch, for evaluating the profile of a  
5 called party.

## Patent Application

1 9. The system according to claim 1, further comprising a means for muting said call so  
2 that a calling party is placed on hold and a called party receives voice traffic from said  
3 calling party and said called party's voice traffic is not heard by said calling party.

1 10. The system according to claim 1, further comprising a means for a calling party to  
2 transfer a call on hold to voice mail so as to enable the calling party to leave the called party  
3 a message.

1 11. The system according to claim 1, further comprising a means for a calling party to  
2 send an alphanumeric message to a called party while on call hold.

1 12. The system according to claim 1, wherein said system will place an incoming call  
2 on hold in response to input from said mobile station before the call is answered and active.

1 13. The system according to claim 12, further comprising:  
2 a digital processor for providing comfort noise to a voice channel of said call on  
3 hold.

1 14. The system according to claim 13, further comprising:  
2 a voice processing unit for providing an announcement to at least one party of the  
3 call on hold.

1 15. The system according to claim, 14, wherein the announcement is provided to a  
2 calling party and an alert is provided to a called party to indicate that the call is on hold.

1 16. The system according to claim 15, wherein said announcement is provided  
2 repeatedly over time.

1 17. The system according to claim 16, wherein said intelligent radio transceiver is a  
2 voice access port.

1 18. The system according to claim 17, further comprising a remote digital terminal  
2 connected to said local digital switch and said voice access port.

1 19. A method for placing a telephone call with a mobile station on hold, comprising the  
2 steps of:

3 establishing an active call between a calling party and a called party of said mobile  
4 station;

5 requesting, using an input on said mobile station, an intelligent transceiver to place  
6 said active call on hold; and

7 discontinuing transmission of voice traffic frames by said intelligent transceiver so as  
8 to place said call on hold.



1 20. The method according to claim 19, further including the step of providing comfort  
2 noise using a digital signal processor to at least one of said calling party and said called  
3 party.

1 21. The method according to claim 20, further comprising the step of providing an  
2 announcement to at least one of said calling party and said called party indicating that said  
3 call is on hold.

1 22. The method according to claim 20, further comprising the step of notifying an  
2 network server platform that said active call is on hold.

1 23. The method according to claim 22, further including the steps of:  
2 requesting, using an input on said mobile station, an intelligent transceiver to return said  
3 active call on hold to active status; and  
4 reinstating transmission of voice traffic frames by said intelligent transceiver so as to  
5 cause said call on hold to return to an active call in which said calling party and said called  
6 party can resume a conversation.

1 24. The method according to claim 23, further including the steps of  
2 discontinuing said comfort noise; and  
3 notifying said network server platform that said call on hold is now active.

1 25. The method according to claim 24, wherein said intelligent transceiver is a voice  
2 access port.

1 26. A method for placing an incoming call to a mobile station on hold, comprising the  
2 steps of:  
3 notifying a mobile station of an incoming call;  
4 requesting, using an input on said mobile station, an intelligent transceiver to place  
5 said incoming call on hold before said incoming call is answered; and  
6 withholding transmission of voice traffic frames by said intelligent transceiver so as  
7 to place said incoming call on hold.

1 27. The method according to claim 26, further comprising the step of providing an  
2 announcement to at least one of a calling party and a called party of said mobile station  
3 indicating that said call is on hold.

1 28. The method according to claim 27, further including the step of providing noise  
2 using a digital signal processor to at least one of said calling party and said called party.

1 29. The method according to claim 28, further comprising the step of notifying an  
2 network server platform that said incoming call is on hold.

1 30. The method according to claim 29, further including the steps of:

2            requesting, using an input on said mobile station, said intelligent transceiver to place  
3        said incoming call presently on hold to active status; and  
4        transmitting voice traffic frames with said intelligent transceiver so as to convert said call on  
5        hold to an active call in which said calling party and said called party can enter into a  
6        conversation.

1        31.     The method according to claim 30, further including steps of  
2            discontinuing said comfort noise; and  
3            notifying said network server platform that said incoming call previously on hold  
4        is now active.

1        32.     The method according to claim 31, wherein said intelligent transceiver is a voice  
2        access port.

1        33.     The method according to claim 32, wherein said step of providing an announcement  
2        is repeated over time.

1        34.     The method according to claim 26, further comprising the step of muting said call so  
2        that a calling party is placed on hold and a called party receives voice traffic from said  
3        calling party and said called party's voice traffic is not heard by said calling party.

1 35. The method according to claim 26, further comprising the step of transferring a call  
2 on hold to voice mail in response to a calling party input so as to enable the calling party to  
3 leave a called party a message.

1 36. The method according to claim 26, further comprising the step of transmitting an  
2 alphanumeric message from a calling party to a called party while on call hold, in response  
3 to input of said calling party.

## **XI. User Proactive Call Handling**

1 1. A system for allowing a called party to proactively handle in real time an incoming  
2 call to a mobile station assigned to the called party, comprising:  
3 a local digital switch, responsive to an incoming call, for creating a voice path  
4 between an origin of the incoming call and the local digital switch;  
5 a network server platform coupled to said local digital switch, for transmitting a  
6 short message to the called party over a control channel, the short message informing the  
7 called party of the incoming call;  
8 a base station for receiving the short message from said network server platform and  
9 transmitting the short message over the control channel to the called party and for receiving  
10 over the control channel from the called party a selection of one of a plurality of options for  
11 terminating the incoming call and transmitting the selection over the control channel to said  
12 network server platform, said network server platform terminating the call in accordance  
13 with the selection.

2. The system according to claim 1, further comprising a mobile station, assigned to the called party and registered with said base station, for receiving the short message, said mobile station having a user interface, wherein responsive to the short message, the called party inputting to the user interface a selection of one of a plurality of options for terminating the incoming call and said mobile station transmitting the selection over the control channel to said base station.

3. The system according to claim 1, wherein said network server platform comprises:  
a memory for storing a profile of the called party; and  
a controller, responsive to said local digital switch, for evaluating the profile of the called party and transmitting a short message to the called party if the profile indicates that the called party subscribes to a proactive call handling service.

4. The system according to claim 3, wherein said controller further evaluates the profile of the called party subscribing to the proactive call handling service to determine whether the service is active for the called party.

5. The system according to claim 4, wherein said network server platform carries out a default call handling according to the profile of the called party when the service is not active.

1 6. The system according to claim 4, wherein said controller determines the physical  
2 location of the called party's mobile station to determine whether the service is active.

1 7. The system according to claim 1, wherein the options include answering the call  
2 immediately, delay answering the call, forwarding the call to voice mail, forwarding the call  
3 to another number, and rejecting the call.

1 8. The system according to claim 7, wherein one of the options is to take no action,  
2 wherein said NSP takes a default action if no selection is received from the called party  
3 within a predetermined time period.

1 9. The system according to claim 1, wherein one of the options includes sending a short  
2 message to the origin of the incoming call over the control channel.

1 10. The system according to claim 1, wherein the short message includes calling party  
2 ID information.

1 11. The system according to claim 1, wherein said base station is a voice access port in a  
2 wireless centrex system.

1 12. The system according to claim 1, wherein said network server platform allocates a  
2 voice channel between the called party and said local digital switch if the selection of the  
3 called party for terminating the incoming call requires a voice channel.

1 13. The system according to claim 1, wherein said network server platform includes a  
2 voice processing unit for delivering a voice message to the origin of the incoming call when  
3 the selection of the called party is to delay answering the incoming call.

1 14. The system according to claim 1, wherein said local digital switch and said network  
2 server platform are elements of a mobile switching center.

1 15. The system according to claim 1, wherein said network server platform transmits a  
2 user alert with the short message over the control channel and the called party receives the  
3 user alert from said network server platform with the short message by way of said base  
4 station.

1 16. A system for allowing a called party to proactively handle in real time an incoming  
2 call to a mobile station assigned to the called party, comprising:

3 a local digital switch, responsive to an incoming call, for creating a voice path  
4 between an origin of the incoming call and the local digital switch;

5 a network server platform coupled to said local digital switch, for transmitting a user  
6 alert to the called party over a control channel, the user alert alerting the called party of the  
7 incoming call;

8 a base station for receiving the user alert in the control channel said network server  
9 platform and transmitting the user alert over the control channel to the called party and for  
10 receiving over the control channel from the called party a selection of one of a plurality of

11 options for terminating the incoming call and transmitting the selection over the control  
12 channel to said network server platform, said network server platform terminating the call in  
13 accordance with the selection.

1 17. The system according to claim 16, further comprising a mobile station, assigned to  
2 the called party and registered with said base station, for receiving the user alert, said mobile  
3 station having a user interface, wherein responsive to the user alert, the called party  
4 inputting to the user interface a selection of one of a plurality of options for terminating the  
5 incoming call and said mobile station transmitting the selection over the control channel to  
6 said base station.

1 18. The system according to claim 17, wherein said mobile station receives an audible  
2 tone corresponding to the user alert.

1 19. The system according to claim 18, wherein the audible tone includes calling party ID  
2 information.

1 20. The system according to claim 16, wherein the options include answering the call  
2 immediately, delay answering the call, forwarding the call to voice mail, forwarding the call  
3 to another number, and rejecting the call.



1 21. The system according to claim 16, wherein said network server platform allocates a  
2 voice channel between the called party and said local digital switch if the selection of the  
3 called party for terminating the incoming call requires a voice channel.

1 22. The system according to claim 16, wherein said local digital switch and said network  
2 server platform are elements of a mobile switching center.

1 23. The system according to claim 16, wherein said base station is a voice access port in  
2 a wireless centrex system.

1 24. A method for allowing a called party to proactively handle in real time an incoming  
2 call to a mobile station assigned to the called party, comprising the steps of:  
3 transmitting a short message to the called party over a control channel, the short  
4 message informing the called party of the incoming call;  
5 the called party receiving the short message transmitted over the control channel;  
6 selecting one of a plurality of options for terminating the incoming call; and  
7 transmitting the option selected over the control channel; and  
8 terminating the incoming call in accordance with the option selected.

1 25. The method according to claim 24, wherein said step of selecting includes inputting  
2 to a user interface the option for terminating the incoming call.

## Patent Application

1 26. The method according to claim 24, wherein said step of transmitting includes the  
2 steps of evaluating a profile of the called party and transmitting a short message to the called  
3 party if the profile indicates that the called party subscribes to a proactive call handling  
4 service.

1 27. The method according to claim 26, wherein said step of evaluating includes the step  
2 of determining whether the service is active for the called party.

1 28. The method according claim 27, further including the step of terminating the  
2 incoming call based on a default call handling defined in the profile of the called party when  
3 the service is not active.

1 29. The method according to claim 27, further wherein said step of determining the  
2 physical location of the called party's mobile station to determine whether the service is  
3 active.

1 30. The method according to claim 24, wherein the options include answering the call  
2 immediately, delay answering the call, forwarding the call to voice mail, forwarding the call  
3 to another number, and rejecting the call.

1 31. The method according to claim 30, wherein one of the options is to take no action,  
2 and wherein said step of terminating terminates the incoming call according a default action

3 defined in a profile for the called party if no selected option is received from the called party  
4 within a predetermined time period.

1 32. The method according to claim 24, wherein one of the options includes sending a  
2 short message to the origin of the incoming call over the control channel.

1 33. The method according to claim 24, wherein the short message includes calling party  
2 ID information.

1 34. The method according to claim 24, wherein the called party is in a wireless centrex  
2 system.

1 35. The method according to claim 24, wherein said step of terminating includes  
2 allocating a voice channel to the called party for the incoming call if the option selected  
3 requires a voice channel.

1 36. The method according to claim 24, wherein said step of terminating includes  
2 delivering a voice message to the origin of the incoming call when the selection of the called  
3 party is to delay answering the incoming call.

1 37. The method according to claim 24, wherein the called party is in a cellular telephone  
2 network.

1 38. A method for allowing a called party to proactively handle in real time an incoming  
2 call to a mobile station assigned to the called party, comprising the steps of:

3 transmitting a user alert to the called party over a control channel, the user alert  
4 alerting the called party of the incoming call;

5 the called party receiving the user alert transmitted over the control channel;

6 selecting one of a plurality of options for terminating the incoming call; and

7 transmitting the option selected over the control channel; and

8 terminating the incoming call in accordance with the option selected.

1 39. The method according to claim 38, wherein said step of selecting includes inputting  
2 to a user interface the option for terminating the incoming call.

1 40. The method according to claim 38, wherein said step of receiving includes receiving  
2 an audible tone corresponding to the user alert.

1 41. The method according to claim 40, wherein the audible tone includes calling party  
2 ID information.

1 42. The method according to claim 38, wherein the options include answering the call  
2 immediately, delay answering the call, forwarding the call to voice mail, forwarding the call  
3 to another number, and rejecting the call.

1 43. The method according to claim 38, wherein said step of terminating includes  
2 allocating a voice channel to the called party for the incoming call if the option selected  
3 requires a voice channel.

1 44. The method according to claim 38, wherein the called party is in a wireless centrex  
2 system.

1 45. The method according to claim 38, wherein the called party is in a cellular telephone  
2 network.

## **XII. Call Transfers**

1 1. A method for transferring a telephone call with a mobile station, comprising the  
2 steps of:  
3 establishing an active call between another communication device and said mobile  
4 station;  
5 requesting, using an input on said mobile station, an intelligent transceiver to transfer  
6 said active call; and  
7 forwarding said requested call transfer from said intelligent transceiver to a network  
8 server platform using a feature request message.

## Patent Application

1    2.     The method according to claim 1, further including the step of approving said mobile  
2    station as being authorized for said call transfer of said active call to a transfer-to directory  
3    number.

1    3.     The method according to claim 2, further comprising the step of providing an  
2    announcement to at least one of said mobile station and said another communication device  
3    connected to said active call, indicating that said call is being transferred.

1    4.     The method according to claim 2, further comprising the step of providing said  
2    intelligent transceiver instructions from said network server platform indicating that said  
3    active call is to be transferred to said transfer-to directory number.

1    5.     The method according to claim 4, further including the steps of:  
2         placing an active call on hold with said intelligent transceiver; and  
3         playing comfort noise to at least said another user communication device.

1    6.     The method according to claim 4, further including the steps of:  
2         setting up another call between a local digital switch and said transfer-to directory  
3    number; and  
4         instructing said network server platform to complete said call transfer, using a  
5    feature request message.

1    7.     The method according to claim 6, further comprising the steps of:

releasing said mobile station from all calls;  
releasing said intelligent transceiver from said another call; and  
releasing said intelligent transceiver from said active call.

8. The method according to claim 7, further comprising the step of connecting said active call on hold with said another call so that said another communication device is connected to said transfer-to directory number.

9. The method according to claim 8, wherein said transfer-to directory number is associated with a PSTN telephone.

10. The method according to claim 8, wherein said transfer-to directory number is associated with another mobile station within a wireless centrex system.

11. A method for transferring an active call with a mobile station in a wireless centrex system, comprising the steps of:  
sending a feature request message from a voice access port to a network server platform, said feature request message including a call transfer feature code and a transfer-to directory number;  
placing said active call on hold;  
setting up another call with said transfer-to directory number;  
connecting said active call on hold with said transfer-to directory number; and  
releasing said mobile station from said active call and said another call.

12. The method according to claim 11, further including the step of providing said mobile station with a voice prompt indicating that said call is being transferred.

13. The method according to claim 12, further including the step of sending a transfer message from said network server platform to said voice access port so as to trigger said active call being placed on hold.

14. The method according to claim 13, wherein said step of setting up another call with said transfer-to directory number is set up so that said active call is transferred to a directory number outside said wireless centrex system.

15. The method according to claim 13, wherein said step of setting up another call with said transfer-to directory number is set up so that said active call is transferred to a directory number within said wireless centrex system.

16. A system for handling a telephone call to a mobile station, comprising:  
a local digital switch for creating a voice path between said mobile station and another user communication device;  
a network server platform coupled to said local digital switch for receiving a feature request message and determining whether said mobile station is authorized to receive a call transfer feature requested; and



an intelligent radio transceiver for receiving a call transfer request from said mobile station and placing an active call on hold while a transfer-to directory number is contacted.

17. The system according to claim 16, wherein said network server platform sends a transfer message to said intelligent radio transceiver.

18. The system according to claim 17, further comprising:  
a voice processing unit for providing an announcement to at least one party of said active call instructing that the call is being transferred.

19. The system according to claim 18, further comprising:  
a digital signal processor for providing a noise to a voice channel of said another user communication device and wherein the announcement is provided to at least said mobile station so as to indicate that the call is being transferred.

20. The system according to claim 19, wherein said announcement is provided repeatedly over time.

21. The system according to claim 20, wherein said intelligent radio transceiver is a voice access port.

22. The system according to claim 21, further comprising a remote digital terminal connected to said local digital switch and said voice access port.

1 23. The system according to claim 22, wherein said network server platform further  
2 comprises:  
3 a memory for storing information related to a profile of the mobile station; and  
4 a controller, responsive to said local digital switch, for evaluating the profile of a  
5 called party.

1 24. The system according to claim 16, further comprising a means for said mobile  
2 station to interrupt said call transfer before it is completed.

1 25. The system according to claim 16, further comprising a means for said mobile  
2 station to retrieve said active call placed on hold during said call transfer.

1 26. The system according to claim 16, further comprising a means for setting up a call  
2 between said mobile station and said transfer-to directory number.

1 27. The system according to claim 16, further comprising a means for enabling said  
2 mobile station to actively provide said network server platform an instruction to complete  
3 said call transfer to said transfer-to directory number.

1 28. The system according to claim 27, wherein said means for enabling said mobile  
2 station to actively provide said network server platform an instruction to complete said call  
3 transfer includes a feature request message.

1 29. The system according to claim 28, wherein said mobile station is released from said  
2 active call.

1 30. The system according to claim 29, wherein said active call is transferred so that said  
2 another user communication device is connected in voice traffic to said transfer-to directory  
3 number.

1 31. The system according to claim 30, wherein said another user communication device  
2 is a first PSTN telephone.

1 32. The system according to claim 31, wherein said transfer-to directory number is  
2 associated with a directory number outside a wireless centrex system.

1 33. The system according to claim 31, wherein said transfer-to directory number is  
2 associated with a directory number within a wireless centrex system.

### **XIII. Caller ID**

1 1. A method for providing caller identification information for a mobile station,  
2 comprising the steps of:  
3 initiating, with said mobile station, a call to another communication device;

## Patent Application

4 determining, with an intelligent server, said caller identification information based  
5 on an identifier of said mobile station; and  
6 providing said caller identification information to said another communication  
7 device.

1 2. The method according to claim 1, wherein said caller identification is extracted from  
2 a data table stored in a database which associates said identifier with said caller  
3 identification information.

1 3. The method according to claim 2, wherein said identifier is a mobile station  
2 identification number and said caller identification information includes a desk top  
3 telephone number associated with said mobile station.

1 4. The method according to claim 1, further including the step of including said caller  
2 identification information in an available field of a standard call setup signaling message.

1 5. The method according to claim 4, wherein said caller identification information is  
2 forwarded to said mobile station in an alert message.

1 6. The method according to claim 5, wherein said caller identification information is  
2 forwarded to an intelligent transceiver in an origination acknowledgment message.

## Patent Application

- 1 7. The method according to claim 6, wherein said caller identification information is  
2 forwarded to a local digital switch in a setup message.
- 1 8. The method according to claim 1, wherein said caller identification includes a  
2 directory number for a desktop telephone.
- 1 9. A method according to claim 1, wherein said caller identification includes at least  
2 one party to a call's name.
- 1 10. The method according to claim 1, wherein said caller identification includes location  
2 information.
- 1 11. The method according to claim 10, wherein said location identification includes an  
2 address.
- 1 12. The method according to claim 10, wherein said location identification includes  
2 campus location information.
- 1 13. The method according to claim 1, further including the step of including said caller  
2 identification information in a signaling that permits user to user information exchange.
- 1 14. The method according to claim 13, wherein said caller identification information is  
2 forwarded to said mobile station in an alert message.

1 15. A method for providing caller identification information for a mobile station,  
2 comprising the steps of:  
3 originating, with said mobile station, a call to another communication device;  
4 determining, with an intelligent server, said caller identification information based  
5 on an identifier of said mobile station; and  
6 storing said caller identification information, a called party number associated with  
7 said another communication device and a number associated with an intelligent transceiver.

1 16. The method according to claim 15, further comprising the step of terminating said  
2 call to another communication device by matching said called party number associated with  
3 said another communication device and a number associated with an intelligent transceiver.

1 17. The method according to claim 16, further comprising the step of providing said  
2 caller identification information to said another communication device based on said  
3 matching.

1 18. The method according to claim 17, wherein said caller identification information is  
2 forwarded to said mobile station in an alert message.

#### XIV. Screening Calls

1 1. A method for blocking incoming calls to a mobile station assigned to the called  
2 party, comprising the steps of:  
3 enabling said call blocking by entering a feature code with said mobile station;

## Patent Application

4 identifying a directory number from which incoming calls to said mobile station will  
5 be blocked;  
6 verifying that said mobile station is authorized to block incoming calls; and  
7 storing said directory number in a database including a list of directory numbers  
8 from which incoming calls to said mobile station will be blocked.

1 2. The method according to claim 1, wherein said step of identifying a directory  
2 number includes entering the digits of said directory number with said mobile station.

1 3. The method according to claim 1, wherein said step of identifying a directory  
2 number includes not entering said directory number with said mobile station and entering  
3 only said feature code such that a directory number of said last active call is retrieved and  
4 used as said directory number for call blocking.

1 4. The method according to claim 2, further comprising the step of blocking a call  
2 originating from said directory number which is intended for said mobile station.

1 5. The method according claim 4, further including the step of providing a particular  
2 call treatment to said blocked call.

1 6. The method according to claim 5, wherein said particular call treatment is  
2 determined based on a system default.

## Patent Application

1 7. The method according to claim 5, wherein said particular call treatment is dropping  
2 said blocked call without any announcement.

1 8. The method according to claim 7, wherein a network server platform instructs a local  
2 digital switch to disconnect said blocked call to accomplish said dropping of said blocked  
3 call without any announcement.

1 9. The method according to claim 8, wherein said local digital switch assumes  
2 processing of said blocked call and drops said call.

1 10. The method according to claim 5, wherein said particular call treatment is sending  
2 said call to a resource.

1 11. The method according to claim 10, wherein said resource is selected from the group  
2 consisting of an answering service, a voice mail system, and an operator assistant.

1 12. The method according to claim 11, wherein a network server platform determines  
2 which resource is selected and instructs a local digital switch to select said resource.

1 13. The method according to claim 12, wherein said local digital switch and said  
2 resource process said blocked call and drop said blocked call after processing of said  
3 blocked call by said resource is complete.



1 14. The method according to claim 5, wherein said particular call treatment is providing  
2 said call with an announcement.

1 15. The method according to claim 14, wherein said announcement is selected from the  
2 group consisting of a system default call screen message, a recorded message created by a  
3 user of said mobile station, and a voice synthesized message defined by said user of said  
4 mobile station.

1 16. The method according to claim 15, further comprising a step of selecting which of a  
2 plurality of intelligent transceivers will play said announcement, and wherein a network  
3 server platform requests one of said plurality of intelligent transceivers to play said  
4 announcement.

1 17. The method according to claim 16, further comprising the step of playing said  
2 announcement to said blocked call calling party.

1 18. The method according to claim 5, wherein said blocked call originates from a  
2 telephone outside a wireless centrex system.

1 19. The method according to claim 5, wherein said blocked call originates from a  
2 telephone within a wireless centrex system.

20. A method for screening incoming calls directed to a mobile station in a wireless centrex system, comprising the steps of:

- enabling call screening by entering a feature code with said mobile station;
- identifying a directory number from which incoming calls to said mobile station will be blocked;
- transmitting said feature code from said mobile station through an intelligent transceiver to a network server platform;
- verifying, with said network server platform, that said mobile station is authorized to block incoming calls;
- storing, with said network server platform, said directory number in a database including a list of directory numbers from which incoming calls to said mobile station will be blocked;
- blocking said incoming call originating from said directory number which is intended for said mobile station;
- providing a call treatment for said blocked incoming call;
- instructing a local digital switch with said network server platform as how to dispose of said blocked incoming call according to said call treatment; and
- disconnecting said blocked incoming call using said local digital switch.

21. A system for allowing a called party to screen an incoming call to a mobile station, comprising:

- a local digital switch, responsive to an incoming call, for creating a voice path between an origin of the incoming call and the local digital switch;

## Patent Application

5 a network server platform coupled to said local digital switch for determining a  
6 location of the called mobile station and determining whether an incoming call is to be  
7 blocked; and

8 an intelligent radio transceiver for receiving a call screen activate/deactivate  
9 instruction from said mobile station and instructing said network server platform to place  
10 calls originating from particular directory numbers in a call screen log.

1 22. The system according to claim 21, wherein said network server platform determines  
2 disposition of said incoming call to be blocked.

1 23. The system according to claim 22, wherein said network server platform comprises:  
2 a memory for storing information related to a profile of the mobile station; and  
3 a controller, responsive to said local digital switch, for evaluating the profile of a  
4 called party and instruction the local digital switch to determine whether said incoming call  
5 is to be blocked and said disposition of said incoming call to be blocked.

1 24. The system according to claim 23, wherein said network server platform carries out a  
2 system default for said disposition according to the profile of the called party.

1 25. The system according to claim 24, wherein said network server platform determines  
2 the disposition is to forward said incoming call to a voice mail system

1 26. The system according to claim 24, further comprising:

## Patent Application

2 a voice processing unit for providing an announcement to a calling party that the call  
3 has been screened, and wherein said network server platform determines the disposition is to  
4 provide said announcement to the calling party.

1 27. The system according to claim 24, wherein said network server platform determines  
2 the disposition is to drop the call without an announcement.

1 28. The system according to claim 27, wherein said intelligent transceiver is a voice  
2 access port in a wireless centrex system.

**XV. Call Forwarding**

**A. Unconditional Call Forwarding**

1 1. A system for forwarding an incoming call, the call originating from a first  
2 communication device and being directed to a directory number of a wireless centrex system, the  
3 system comprising:

4 a local digital switch for routing communications between the first  
5 communication device and a second communication device and for generating a message in  
6 response to the call; and

7 a network server platform coupled to the local digital switch for determining  
8 responsive to receiving the message whether the call should be forwarded,

9 the local digital switch being configured to forward the call to the second  
10 communication device responsive to the network server platform determining that the call should  
11 be forwarded, and being further configured to route the call to a wireless mobile station having a  
12 forward directory number associated with the directory number responsive to the network server  
13 platform determining that the call should not be forwarded.

1 2. The system of claim 1, wherein the first communication device is registered with a PSTN  
2 coupled to the wireless centrex system.

1 3. The system of claim 1, wherein the first communication device is registered with the  
2 wireless centrex system.

1 4. The system of claim 1, wherein the network server platform is configured to determine  
2 whether the call should be forwarded by checking a subscriber profile.

1 5. The system of claim 1, wherein the message comprises a TCAP AIN Termination  
2 Attempt message.

1 6. The system of claim 1, wherein the directory number is a directory number of a wired  
2 communication device.

7. A method for forwarding an incoming call, the call originating from a first  
communication device and being directed to a directory number of a wireless centrex system, the  
method comprising the steps of:

generating a message by a local digital switch in response to the call;

determining by a network server platform, responsive to receiving the message,  
whether the call should be forwarded; and

either forwarding the call to the second communication device responsive to the  
network server platform determining that the call should be forwarded, or routing the call to a  
wireless mobile station having a forward directory number associated with the directory number  
responsive to the network server platform determining that the call should not be forwarded.

1 8. The method of claim 7, wherein the first communication device is registered with a  
2 PSTN coupled to the wireless centrex system.

9. The method of claim 7, wherein the first communication device is registered with the wireless centrex system.

10. The method of claim 7, wherein the step of determining includes checking a subscriber profile.

11. The method of claim 7, wherein the step of generating the message includes generating a TCAP AIN Termination Attempt message.

12. The method of claim 7, wherein the directory number is a directory number of a wired communication device.

#### **B. Busy Call Forwarding**

1. A system for forwarding an incoming call, the call originating from a first communication device and being directed to a directory number of a wireless centrex system, the system comprising a local digital switch for routing communications between the first communication device and a second communication device and for determining whether a wireless mobile station having a forward directory number associated with the directory number is busy with another call, the local digital switch being configured to forward the call to the second communication device responsive to the network server platform determining that the wireless mobile station is busy, and being further configured to route the call to the wireless mobile station responsive to the network server platform determining that the wireless mobile station is not busy.

## Patent Application

1 2. The system of claim 1, wherein the first communication device is registered with a PSTN  
2 coupled to the wireless centrex system.

1 3. The system of claim 1, wherein the first communication device is registered with the  
2 wireless centrex system.

1 4. The system of claim 1, wherein the directory number is a directory number of a wired  
2 communication device.

5. A method for forwarding an incoming call, the call originating from a first  
communication device and being directed to a directory number of a wireless centrex system, the  
method comprising the steps of:

determining by a local digital switch whether a wireless mobile station having a  
forward directory number associated with the directory number is busy with another call,

either forwarding the call by the local digital switch to the second communication  
device responsive to determining that the wireless mobile station is busy, or routing the call to  
the wireless mobile station responsive to determining that the wireless mobile station is not busy.

1 6. The method of claim 5, wherein the first communication device is registered with a  
2 PSTN coupled to the wireless centrex system.

1 7. The method of claim 5, wherein the first communication device is registered with the  
2 wireless centrex system.



1 8. The method of claim 5, wherein the directory number is a directory number of a wired  
2 communication device.

**C. Time-of-Day Call Forwarding**

1 1. A system for forwarding an incoming call, the call originating from a first  
2 communication device and being directed to a directory number of a wireless centrex system, the  
3 system comprising:

4 a local digital switch for routing communications between the first  
5 communication device and a second communication device and for generating a message in  
6 response to the call;

7 a clock for generating a current time; and

8 a network server platform coupled to the local digital switch and the clock or  
9 determining whether the current time is between a begin time and an end time,

10 the local digital switch being configured to forward the call to the second  
11 communication device responsive to the network server platform determining that the current  
12 time is between the begin time and the end time, and being further configured to route the call to  
13 a wireless mobile station having a forward directory number associated with the directory  
14 number responsive to the network server platform determining that the call should not be  
15 forwarded.

1 2. The system of claim 1, wherein the first communication device is registered with a PSTN  
2 coupled to the wireless centrex system.

## Patent Application

3. The system of claim 1, wherein the first communication device is registered with the wireless centrex system.

4. The system of claim 1, wherein the message comprises a TCAP AIN Termination Attempt message.

5. The system of claim 1, wherein the directory number is a directory number of a wired communication device.

6. The system of claim 1, wherein at least one of the begin time and the end time includes a date, and the current time as generated by the clock includes a current date.

7. A method for forwarding an incoming call, the call originating from a first communication device and being directed to a directory number of a wireless centrex system, the method comprising the steps of:

generating a current time;

determining whether the current time is between a begin time and an end time;

and

either forwarding the call to the second communication device responsive

determining that the current time is between the begin time and the end time, or routing the call

to a wireless mobile station having a forward directory number associated with the directory

number responsive to determining that the call should not be forwarded.

1 8. The method of claim 7, wherein the first communication device is registered with a  
2 PSTN coupled to the wireless centrex system.

1 9. The method of claim 7, wherein the first communication device is registered with the  
2 wireless centrex system.

1 10. The method of claim 7, wherein the directory number is a directory number of a wired  
2 communication device.

1 11. The method of claim 7, wherein at least one of the begin time and the end time includes a  
2 date, and the current time includes a current date.

**D. Programmable Ring Call Forwarding**

1 1. A system for forwarding an incoming call, the call originating from a first  
2 communication device and being directed to a directory number of a wireless centrex system, the  
3 system comprising:

4 a timer for counting a predetermined amount of time;

5 a local digital switch for routing communications between the first

6 communication device and a second communication device, for alerting a wireless mobile station

7 having a forward directory number associated with the directory number of the call, and for

8 starting a timer in response to the call, for forwarding the call to the second communication

9 device responsive to the timer counting the predetermined amount of time.

## Patent Application

1 2. The system of claim 1, wherein the first communication device is registered with a PSTN  
2 coupled to the wireless centrex system.

1 3. The system of claim 1, wherein the first communication device is registered with the  
2 wireless centrex system.

1 4. The system of claim 1, wherein the directory number is a directory number of a wired  
2 communication device.

5 5. The system of claim 1, wherein the predetermined amount of time is a time between one  
second and thirty seconds.

6 6. A method for forwarding an incoming call, the call originating from a first  
communication device and being directed to a directory number of a wireless centrex system, the  
method comprising the steps of:

4 alerting a wireless mobile station having a forward directory number associated  
5 with the directory number of the call;

6 counting a predetermined amount of time in response to the call; and  
7 forwarding the call to the second communication device responsive to the predetermined amount  
8 of time being counted.

1 7. The method of claim 6, wherein the first communication device is registered with a  
2 PSTN coupled to the wireless centrex system.

1 8. The method of claim 6, wherein the first communication device is registered with the  
2 wireless centrex system.

1 9. The method of claim 6, wherein the directory number is a directory number of a wired  
2 communication device.

1 10. The method of claim 6, wherein the predetermined amount of time is a time between one  
2 second and thirty seconds.

## XVI. Call Waiting

1 1. In a wireless centrex system, a method for notifying a mobile station of a second call  
2 directed to a subscriber's directory number when the mobile station is involved in a first call,  
3 comprising the steps of:

4 receiving a second call to a directory number of a subscriber, the subscriber having a  
5 mobile station currently registered in the wireless centrex system, the mobile station being  
6 involved in a first call;

7 confirming that call waiting is available to the mobile station;

8 forwarding the second call to a forward directory number assigned to the mobile station;

9 and

10 transmitting a tone to the mobile station, the tone indicating a presence of the second call.

1 2. The method according to claim 1, further comprising the steps of:

2 responsive to a signal from the mobile station, placing the first call on hold, and  
3 establishing a voice path for the second call between the mobile station and a calling  
4 party.

1 3. The method according to claim 1, further comprising the step of, responsive to a signal  
2 from the mobile station, routing the second call to a voice messaging system.

1 4. The method according to claim 1, wherein said step of confirming includes the step of  
2 determining whether the mobile station subscriber subscribes to call waiting.

1 5. The method according to claim 1, wherein said step of confirming includes the step of  
2 determining whether call waiting is currently available to the mobile station.

1 6. The method according to claim 1, wherein said step of transmitting includes the step of  
2 transmitting the tone periodically for a preset duration.

1 7. The method according to claim 1, further comprising the step of routing the second call to  
2 a voice messaging system if the second call has not been answered within a preset time after the  
3 tone has been transmitted to the mobile station.

1 8. The method according to claim 1, wherein said step of confirming includes the step of  
2 confirming that the first call is not a call involving multiple parties.

## Patent Application

1 9. The method according to claim 1, wherein said step of confirming includes the step of  
2 confirming that the mobile station is not currently involved in another call waiting.

1 10. The method according to claim 1, wherein said step of confirming includes the step of  
2 confirming that the mobile station has not received an automatic callback call with the first call  
3 on hold.

1 11. The method according to claim 1, wherein said step of confirming includes the step of  
2 confirming that the subscriber has not disabled call waiting.

1 12. The method according to claim 1, wherein said step of confirming includes the step of  
2 confirming that the mobile station is located in an area for which call waiting has not been  
3 disabled.

1 13. The method according to claim 1, wherein said step of confirming includes the step of  
2 confirming that call waiting has not been disabled when the first call is from a predetermined  
3 party.

1 14. The method according to claim 1, wherein said step of confirming includes the step of  
2 confirming that the time of day corresponds to a period in which call waiting is enabled.

**XVII. Distinctive Ringing**

1 1. In a wireless centrex system, a method for alerting a mobile station of a call directed to a  
2 subscriber's directory number from a predetermined directory number, said method comprising  
3 the steps of:

4 receiving a call from a call originating directory number directed to a directory number  
5 of a subscriber, the subscriber having a mobile station currently registered in a wireless centrex  
6 system;

7 comparing the call originating directory number with a list of at least one predetermined  
8 directory number;

9 when the call originating directory number matches a predetermined directory number in  
10 the list, retrieving distinctive call ring information associated with the call originating directory  
11 number;

12 routing the call to the mobile station; and

13 transmitting the distinctive call ring information to the mobile station.

1 2. The method according to claim 1, further comprising the step of, initiating a distinctive  
2 call ring at the mobile station in response to said step of transmitting the distinctive call ring  
3 information.



## Patent Application

1 3. The method according to claim 1, wherein the distinctive call ring information includes  
2 one of a plurality of available distinctive call rings, each distinctive call ring being different  
3 from a normal call ring.

1 4. The method according to claim 1, wherein when the call originating directory number  
2 does not match a predetermined directory number in the list, the method further comprising the  
3 steps of:

4 routing the call to the mobile station; and  
5 initiating a normal call ring at the mobile station.

1 5. The method according to claim 4, further comprising the step of transmitting normal call  
2 ring information to the mobile station.

1 6. The method according to claim 5, wherein the normal call information is no information.

1 7. The method according to claim 1, wherein prior to said step of receiving the call, the  
2 method further comprising the steps of:

3 receiving the predetermined directory number; and  
4 storing the predetermined directory number in the list.

## Patent Application

1 8. The method according to claim 7, wherein said step of receiving the predetermined  
2 directory number includes the step of receiving the predetermined directory number over a  
3 world wide web connection.

1 9. The method according to claim 7, wherein said step of receiving the predetermined  
2 directory number includes the step of receiving the predetermined directory number from the  
3 mobile station.

1 10. The method according to claim 7, further comprising the step of receiving the distinctive  
2 ring information with the predetermined directory number.

1 11. The method according to claim 10, wherein the distinctive ring information includes one  
2 of a plurality of available distinctive rings.

1 12. The method according to claim 11, wherein the distinctive ring information identifies a  
2 default distinctive ring.

### XVIII. Returning Calls

1 1. A method for automatically returning an incoming call in a wireless communication  
2 system, comprising the steps of:

1 receiving the incoming call by a wireless apparatus and automatically saving,  
2 where permitted, a phone number for the incoming call; and  
3 initiating, upon one of: a predetermined button/buttons being pressed or a  
4 predetermined verbal call return command being issued, automatic dialing of the  
5 phone number for the incoming call by the wireless apparatus.

1 2. The method of claim 1, further including, between the steps of receiving the incoming  
2 call and initiating dialing the phone number for the incoming call, automatically  
3 displaying the phone number of the incoming call on a display.

1 3. The method of claim 2 wherein, where the phone number for the incoming call is one of:  
2 unknown or security-protected, indicating that the phone number for the incoming call is  
3 unable to be displayed.

1 4. The method of claim 3 wherein indicating that the phone number for the incoming call is  
2 one of: unknown or security-protected, further including using one of: a display, a voice  
3 prompt, or a predetermined tone to indicate that the phone number of the incoming call is  
4 unable to be displayed.

1 5. The method of claim 2, further including, after the step of receiving the incoming call,  
2 receiving at least one more incoming call and automatically saving a phone number for  
3 each incoming call.

1 6. The method of claim 5, further including, after automatically saving a phone number for  
2 each incoming call, providing for automatic display of the phone number of a most recent  
3 incoming call.

1 7. The method of claim 6 wherein providing for automatic display of the phone number of a  
2 most recent incoming call includes, upon one of: a predetermined button/buttons being  
3 pressed and a verbal command, displaying of the phone number of the most recent  
4 incoming call.

## Patent Application

1 8. The method of claim 7 further including, before the step of initiating dialing the phone  
2 number for the incoming call, the step of disposing of a first displayed phone number by  
3 one of:

4 moving at least one first displayed phone number to an end of a list of phone  
5 numbers of incoming calls received; and  
6 transposing the first displayed phone number with a next phone number of the incoming calls  
7 received.

1 9. The method of claim 1 further including the step of storing predetermined information of  
2 a wireless user in the memory.

10. The method of claim 9 wherein the predetermined information stored in the memory is  
wireless user information for authentication.

11. The method of claim 9 wherein the predetermined information is billing information for  
the wireless user.

12. The method of claim 11 wherein the billing information is downloaded from a network  
server platform to the wireless user, updated and returned to the network server platform,  
and the network server platform blocks further access to the billing information during  
updating.

1 13. An wireless apparatus for automatically returning an incoming call in a wireless  
2 communication system, comprising:  
3 a memory, for automatically saving, where permitted, a phone number for the  
4 incoming call received; and  
5 a wireless call return processor, coupled to the memory, for initiating a wireless communication,  
6 upon one of: a predetermined button/buttons being pressed or a predetermined verbal call

1 return command being issued, by automatically dialing the phone number for the  
2 incoming call.

1 14. The wireless apparatus of claim 13, further including a display, coupled to the memory  
2 and the wireless call return processor, for automatically displaying, where permitted, the  
3 phone number of the incoming call on a display when the incoming call is received.

1 15. The wireless apparatus of claim 14 wherein, where the phone number for the incoming  
2 call is one of: unknown or security-protected, the display indicates that the phone number  
3 for the incoming call is unable to be displayed.

1 16. The wireless apparatus of claim 14 wherein, where the phone number for the incoming  
2 call is one of: unknown or security-protected, a voice prompt indicates that the phone  
3 number for the incoming call is unable to be displayed.

1 17. The wireless apparatus of claim 14 wherein, where the phone number for the incoming  
2 call is one of: unknown or security-protected, a predetermined tone indicates that the  
3 phone number for the incoming call is unable to be displayed.

1 18. The wireless apparatus of claim 14, wherein the memory automatically saves a phone  
2 number, where permitted, for a plurality of incoming calls and the display provides for  
3 automatic display, where permitted, of a phone number of a most recent incoming call.

1 19. The wireless apparatus of claim 13 wherein, prior to the wireless call return processor  
2 initiating dialing the phone number for the incoming call, the wireless call return  
3 processor disposes of a first displayed phone number by one of:

4 moving, at least one first displayed phone number to an end of a list of phone  
5 numbers of incoming calls received; and  
6 transposing the first displayed phone number with a next phone number of the  
7 incoming calls received.

1 20. The wireless apparatus of claim 13 wherein the wireless apparatus is one of:

2 a wireless phone; and

3 another handheld wireless communications device.

4 21. The wireless apparatus of claim 13 wherein the memory further stores predetermined  
5 information of a wireless user.

6 22. The wireless apparatus of claim 21 wherein the predetermined information stored in the  
7 memory is wireless user information for authentication.

1 23. The wireless apparatus of claim 21 wherein the predetermined information is billing  
2 information for the wireless user.

1 24. The wireless apparatus of claim 23 wherein the billing information is obtained from a  
2 network server platform by the wireless user, updated and returned to the network server  
3 platform, wherein further access to the billing information is blocked by the network  
4 server platform during updating.

1 25. A wireless communication system having a wireless apparatus for automatically  
2 returning an incoming call, the wireless apparatus comprising:  
3 a memory, for automatically saving, where permitted, a phone number for the  
4 incoming call received; and  
5 a wireless call return processor, coupled to the memory, for initiating, upon one  
6 of: a predetermined button/buttons being pressed or a predetermined verbal call  
7 return command being issued, dialing the phone number for the incoming call.

26. The wireless communication system of claim 25, further including a display, coupled to  
the memory and the wireless call return processor, for automatically displaying, where  
permitted, the phone number of the incoming call on a display when the incoming call is  
received.

27. The wireless communication system of claim 26 wherein, where the phone number for  
the incoming call is one of: unknown or security-protected, the display indicates that the  
phone number for the incoming call is unable to be displayed.

28. The wireless communication system of claim 26 wherein, where the phone number for  
the incoming call is one of: unknown or security-protected, a voice prompt indicates that  
the phone number for the incoming call is unable to be displayed.

- 1 29. The wireless communication system of claim 26 wherein, where the phone number for  
2 the incoming call is one of: unknown or security-protected, a predetermined tone  
3 indicates that the phone number for the incoming call is unable to be displayed.
- 1 30. The wireless communication system of claim 26, wherein the memory automatically  
2 saves a phone number, where permitted, for a plurality of incoming calls and the display  
3 provides for automatic display, where permitted, of a phone number of a most recent  
4 incoming call.
- 1 31. The wireless communication system of claim 25 wherein, prior to the wireless call return  
2 processor initiating dialing the phone number for the incoming call, the wireless call  
3 return processor disposes of a first displayed phone number by one of:  
4 moving, at least one first displayed phone number to an end of a list of phone  
5 numbers of incoming calls received; and  
6 transposing the first displayed phone number with a next phone number of the  
7 incoming calls received.
- 1 32. The wireless communication system of claim 25 wherein the system includes:  
2 a switched communications network, coupled to at least a first remote digital  
3 terminal RDT;  
4 at least a first network server platform NSP, coupled to at least a first local digital  
5 switch LDS;  
6 the at least first LDS, coupled to the at least first RDT and the at least first NSP,  
7 and, where selected, to a voice message system VMS;  
8 the at least first RDT, coupled to the at least first LDS, at least a first voice access  
9 port VAP;



1 the at least first VAP, coupled to the at least first RDT and arranged to  
2 communicate with at least a first mobile station MS;  
3 the at least first mobile station MS, arranged to communicate with the at  
4 least first VAP, wherein the at least first MS includes the wireless  
5 apparatus for automatically returning the incoming call;  
6 and wherein the switched communications network, the at least first NSP, the at least first  
7 LDS, the at least first RDT, the at least first VAP and the at least first MS utilize a  
8 predetermined scheme to automatically return an incoming call to the wireless apparatus.

1 33. The wireless communication system of claim 25 wherein the memory further s stores  
2 predetermined information of a wireless user.

1 34. The wireless communication system of claim 33 wherein the predetermined information  
2 stored in the memory is wireless user information for authentication.

1 35. The wireless communication system of claim 33 wherein the predetermined I  
2 information is billing information for the wireless user.

1 36. The wireless communication system of claim 35 wherein the billing information is  
2 obtained from a network server platform by the wireless user, updated and returned to the  
3 network server platform, wherein further access to the billing information is blocked by  
4 the network server platform during updating.

1 37. A method for wireless automatic call return comprising the steps of:

1 configuring a wireless communication system to automatically return a previously  
2 received call; and  
3 returning, automatically, the previously received call.

1 38. A wireless communication platform for providing automatic wireless call return,  
2 comprising:  
3 at least one mobile station; and  
4 a micro-cellular base station controller, arranged to communicate wirelessly with  
5 the at least one mobile station and to receive an incoming call directed to the at  
6 least one mobile station, for, when the at least one mobile station is processing  
7 another call, automatically returning the incoming call in accordance with a  
8 predetermined scheme to provide automatic call return for the at least one mobile  
9 station.

10 39. The wireless communication platform of claim 38 further including:  
1 a switching and database processor, coupled to the micro-cellular base station  
2 controller and a memory, for switching the incoming call according to the predetermined  
3 scheme to provide an automatic call return for the at least one mobile station, upon one  
4 of: a predetermined button/buttons being pressed or a predetermined verbal call return  
5 command being issued, by automatically dialing a phone number for the incoming call,  
6 wherein the phone number is stored in a database of the memory; and  
7 the memory, coupled to the micro-cellular base station controller and the switching and  
8 database processor, having a database for storing at least the phone number of the  
9 incoming call.

1 40. The wireless communication platform of claim 39 wherein the memory further stores  
2 information for authentication of the at least one mobile station.

1 41. The wireless communication platform of claim 39 wherein memory further stores billing  
2 information for the at least one mobile station.

**XIX. Automatic Callback [DJS]**

1 1. A method for, where a number called by a wireless user is busy, automatically redialing a  
2 call in a wireless communication system, comprising the steps of:

3 dialing a phone number for a call by a wireless apparatus, and where the phone  
4 number called is busy, automatically saving the phone number for the call; and  
5 initiating, upon one of: a predetermined button/buttons being pressed or a  
6 predetermined verbal callback command being issued, automatic redialing of the  
7 phone number for the call by the wireless apparatus.

1  
2 2. The method of claim 1, further including automatically displaying the phone number of  
3 the call on a display.

1 3. The method of claim 1, further including receiving at least one incoming call and  
2 automatically saving a phone number for the at least one incoming call.

4. The method of claim 3, further including providing for automatic display of the phone number of a most recent incoming call by one of: pressing a predetermined button/buttons and providing a verbal command.

5. The method of claim 4, further including, where the phone number for the at least one incoming call is one of: unknown or security-protected, indicating that the phone number for the at least one incoming call is unable to be displayed.

6. The method of claim 5, wherein indicating that the phone number of the incoming call is unable to be displayed includes using one of: a display, a voice prompt from the wireless apparatus, or a predetermined tone.

7. The method of claim 4, further including the step of disposing of a first displayed phone number by one of:  
moving at least one first displayed phone number to an end of a list of phone numbers of incoming calls received; and  
transposing the first displayed phone number with a next phone number of the incoming calls received.

8. The method of claim 1, further including the step of storing predetermined information of a wireless user in the memory.

9. The method of claim 8, wherein the predetermined information stored in the memory is wireless user information for authentication.

10. The method of claim 8, wherein the predetermined information is billing information for the wireless user.

11. The method of claim 1, further including downloading billing information from a network server platform to the wireless user, updating the billing information and returning the billing information that has been updated to the network

12. A wireless apparatus for, where a number called by a wireless user is busy, automatically redialing the number in a wireless communication system, comprising:

a memory, for automatically saving the number, and, where selected, a phone number for an incoming call received; and

a wireless automatic callback processor, coupled to the memory, for initiating a wireless communication, upon one of: a predetermined button/buttons being pressed or a predetermined verbal callback command being issued, by automatically redialing the number.

13. The wireless apparatus of claim 12, further including a display, coupled to the memory and the wireless automatic callback processor, for automatically displaying the number called, and where selected, of the incoming call.

## Patent Application

- 1 14. The wireless apparatus of claim 13, wherein the memory further automatically saves a  
2 phone number for at least one incoming call.
- 1 15. The wireless apparatus of claim 14, wherein the display indicates the phone number of  
2 the at least one incoming call upon one of: a predetermined button/buttons being pressed  
3 and a verbal command.
- 1 16. The wireless apparatus of claim 14, where the phone number for the at least one  
2 incoming call is one of: unknown or security-protected, the display indicates that the  
3 phone number for the at least one incoming call is unable to be displayed.
- 1 17. The wireless apparatus of claim 14, wherein the wireless apparatus indicates that the  
2 phone number of the incoming call is unable to be displayed using one of: a display, a  
3 voice prompt from the wireless apparatus, or a predetermined tone.
- 1 18. The wireless apparatus of claim 15, wherein the display of the phone number of at least  
2 one incoming call is adjustable by one of:  
3 moving at least one first displayed phone number to an end of a list of phone  
4 numbers of incoming calls received; and  
5 transposing the first displayed phone number with a next phone number of the  
6 incoming calls received.
- 1 19. The wireless apparatus of claim 12, wherein the wireless apparatus is one of:

1 a wireless phone; and

2 another handheld wireless communications device.

1 20. The wireless apparatus of claim 12, wherein the memory further stores predetermined  
2 information of a wireless user.

1 21. The wireless apparatus of claim 20, wherein the predetermined information stored in the  
2 memory is wireless user information for authentication.

1 22. The wireless apparatus of claim 20, wherein the predetermined information is billing  
2 information for the wireless user.

1 23. The wireless apparatus of claim 22, wherein the billing information is obtained from a  
2 network server platform by the wireless user, updated and returned to the network server  
3 platform, wherein further access to the billing information is blocked by the network  
4 server platform during updating.

1 24. A wireless communication system having a wireless apparatus for, where a number  
2 called by a wireless user is busy, automatically redialing the number, the wireless  
3 apparatus comprising:

4 a memory, for automatically saving the number called; and

1 a wireless automatic callback processor, coupled to the memory, for initiating,  
2 upon one of: a predetermined button/buttons being pressed or a predetermined  
3 verbal callback command being issued, redialing the number.

1 25. The wireless communication system of claim 24, further including a display, coupled to  
2 the memory and the wireless automatic callback processor, for automatically displaying  
3 the number called, and where selected, of the incoming call.

1 26. The wireless communication system of claim 25, wherein the memory further  
2 automatically saves a phone number for at least one incoming call.

1 27. The wireless communication system of claim 26, wherein the display indicates the phone  
2 number of the at least one incoming call upon one of: a predetermined button/buttons  
3 being pressed and a verbal command.

1 28. The wireless communication system of claim 27, where the phone number for the at least  
2 one incoming call is one of: unknown or security-protected, the display indicates that the  
3 phone number for the at least one incoming call is unable to be displayed.

1 29. The wireless communication system of claim 28 wherein the wireless apparatus indicates  
2 that the phone number of the incoming call is unable to be displayed using one of: a  
3 display, a voice prompt from the wireless apparatus, or a predetermined tone.



1 30. The wireless communication system of claim 25, wherein the display of the phone  
2 number of at least one incoming call is adjustable by one of:  
3 moving at least one first displayed phone number to an end of a list of phone  
4 numbers of incoming calls received; and  
5 transposing the first displayed phone number with a next phone number of the  
6 incoming calls received.

1 31. The wireless communication system of claim 24, wherein the wireless apparatus is one  
2 of:  
3 a wireless phone; and  
4 another handheld wireless communications device.

1 32. The wireless communication system of claim 24, wherein the memory further stores  
2 predetermined information of a wireless user.

1 33. The wireless communication system of claim 32, wherein the predetermined information  
2 stored in the memory is wireless user information for authentication.

1 34. The wireless communication system of claim 32, wherein the predetermined information  
2 is billing information for the wireless user.

1 35. The wireless communication system of claim 34, wherein the billing information is  
2 obtained from a network server platform by the wireless user, updated and returned to the

1 network server platform, wherein further access to the billing information is blocked by  
2 the network server platform during updating.

1 36. The wireless communication system of claim 24, wherein the system includes:

2 a switched communications network, coupled to at least a first remote digital  
3 terminal RDT;  
4 at least a first network server platform NSP, coupled to at least a first local digital  
5 switch LDS;  
6 the at least first LDS, coupled to the at least first RDT and the at least first NSP,  
7 and, where selected, to a voice message system VMS;  
8 the at least first RDT, coupled to the at least first LDS, at least a first voice access  
9 port VAP;  
10 the at least first VAP, coupled to the at least first RDT and arranged to  
11 communicate with at least a first mobile station MS;  
12 the at least first mobile station MS, arranged to communicate with the at least first VAP,  
13 wherein the at least first MS includes the wireless apparatus for automatically redialing  
14 the number;

15 and wherein the switched communications network, the at least first NSP, the at least first  
16 LDS, the at least first RDT, the at least first VAP and the at least first MS utilize a  
17 predetermined scheme to provide automatic callback for the wireless apparatus.

1 37. A method for wireless automatic callback comprising the steps of:

1 configuring a wireless communication system to automatically redial a phone  
2 number of a call when the phone number called by a user is busy; and  
3 redialing, automatically, the phone number of the call when the phone number  
4 called by the user is busy.

1 38. A wireless communication platform for providing wireless automatic callback,  
2 comprising:

3 at least one mobile station; and  
4 a micro-cellular base station controller, arranged to communicate wirelessly with  
5 the at least one mobile station for, when a number called by the at least one  
6 mobile station is busy, automatically redialing the number in accordance with a  
7 predetermined scheme to provide automatic callback for the at least one mobile  
8 station.

2 39. The wireless communication platform of claim 38, further including:

3 a switching and database automatic callback processor for wireless automatic  
4 callback, coupled to the micro-cellular base station controller and a memory, for  
5 providing processing for wireless automatic callback for the at least one mobile station  
6 upon one of: a predetermined button/buttons being pressed or a predetermined verbal  
7 callback command being issued, by automatically redialing the number; and

1 the memory, coupled to the micro-cellular base station controller and the  
2 switching and database processor, having a database for storing at least the number  
3 redialed.

1 40. The wireless communication platform of claim 38, wherein the memory further stores  
2 information for authentication of the at least one mobile station.

1 41. The wireless communication platform of claim 38, wherein memory further stores billing  
2 information for the at least one mobile station.

XX. Speed Calling

1. A method for a wireless centrex subscriber to call a telephone number using a speed call  
code from a mobile station registered in a wireless centrex system, said method comprising the  
steps of:

4 receiving a call origination request with a speed call code from the mobile station  
5 registered in the wireless centrex system;

6 validating whether the mobile station is authorized for speed call;

7 retrieving a directory number associated with the speed call code if a directory number  
8 has been associated therewith, when the mobile station is authorized for speed call; and

9 initiating a call set up procedure using the retrieved directory number.

## Patent Application

1 2. The method according to claim 1, further comprising the step of, returning a feature  
2 unavailable message to the mobile station, when the mobile station is not authorized for speed  
3 call.

1 3. The method according to claim 2, wherein the feature unavailable message is a short  
2 message.

1 4. The method according to claim 2, wherein the feature unavailable message is an aural  
2 message.

1 5. The method according to claim 1, further comprising the step of returning a message  
2 indicating that no directory number is associated with the speed code, if no directory number is  
3 associated therewith.

1 6. The method according to claim 5, wherein the message is a short message.

1 7. The method according to claim 5, wherein the message is an aural message.

1 8. The method according to claim 1, wherein said step of validating includes the step of  
2 comparing an identification number of the mobile station with an authorized subscriber list.

1 9. The method according to claim 1, wherein the speed call code identifies at least two  
2 directory numbers and said step of retrieving retrieves the at least two directory numbers and  
3 said step of initiating includes initiating a conference call to the at least two directory numbers.

1 10. The method according to claim 1, wherein prior to said step of receiving the call  
2 origination request, the method further comprising the steps of:

3 receiving the directory number; and  
4 associating the directory number with a speed call code; and  
storing the speed call code with its associated directory number.

11. The method according to claim 10, wherein said step of receiving the directory number  
includes the step of receiving the directory number over a World Wide Web connection.

12. The method according to claim 10, wherein said step of receiving the directory number  
includes the step of receiving the directory number from the mobile station.

13. The method according to claim 10, wherein said step of associating includes the step of automatically selecting an unassigned speed call code to be associated with the directory number.

## XXI. Conference Calling

### A. Adding A Party To An Existing Call

1. A method for adding at least one other party to a telephone call with a mobile station, comprising the steps of:

establishing an active call between at least one other communication device and said mobile station;

requesting, using an input on said mobile station, an intelligent transceiver to add said another party to said active call; and

forwarding said requested addition of said another party from said intelligent transceiver to an intelligent server.

2. The method according to claim 1, further including the step of approving said mobile station as being authorized to add said another party to said active call.

3. The method according to claim 2, further comprising the step of providing an announcement to at least one of said mobile station and said at least one communication device connected to said active call, indicating that said another party is being added to said active call so as to create a conference call.

1 4. The method according to claim 2, further comprising the step of providing said  
2 intelligent transceiver instructions from said intelligent server indicating that said another  
3 party having a conference-to directory number is to be added to said active call.

1 5. The method according to claim 4, further including the steps of:  
2 placing said active call on hold with said intelligent transceiver; and  
3 playing comfort noise to said at least one other user communication device.

1 6. The method according to claim 5, further including the steps of:  
2 establishing another active call between said mobile station and said conference-to  
3 directory number; and  
4 indicating to said intelligent transceiver that said conference call setup is proceeding.

1 7. The method according to claim 6, further comprising the step of connecting said  
2 active call on hold with said another active call so that said at least one other communication  
3 device is connected to said conference-to directory number and said mobile station in said  
4 conference call.

1 8. The method according to claim 7, wherein said conference-to directory number is  
2 associated with a PSTN telephone, said step of forwarding said requested addition of said  
3 another party is provided using a feature request message, and said step of indicating to said



intelligent transceiver that said conference call setup is proceeding is provided by using a three way proceeding message.

9. The method according to claim 7, wherein said conference-to directory number is associated with another mobile station within a wireless centrex system.

10. The method according to claim 8, wherein said intelligent transceiver is a voice access port and said intelligent server is a network server platform.

11. The method according to claim 9, wherein said intelligent transceiver is a voice access port and said intelligent server is a network server platform.

12. The method according to claim 5, further comprising the steps of:  
providing a message from said intelligent transceiver to said intelligent server indicating that setup of said conference call has failed;  
providing an announcement to said mobile station indicating that said another party can not be connected; and  
retrieving said active call placed on hold.

13. The method of claim 5, further comprising the steps of:  
receiving input from said mobile station to said intelligent transceiver requesting that setup of said conference call be terminated; and  
disconnecting a call setup with said conference-to directory number; and

retrieving said active call placed on hold.

14. A method for establishing a conference call with a mobile station in a wireless centrex system, comprising the steps of:

- sending a conference call setup request message with said mobile station, said conference call setup request message including a conference call feature initiation code and a conference-to directory number;
- placing an active call on hold;
- setting up another active call with said conference-to directory number and said mobile station; and
- connecting said active call on hold with said another active call.

15. The method according to claim 14, further including the step of sending a feature request message from an intelligent transceiver to an intelligent server.

16. The method according to claim 15, further including the steps of:

- verifying that said mobile station is authorized for said conference call setup; and
- informing said intelligent transceiver to proceed with conference call setup.

17. The method according to claim 16, further including the step of providing said mobile station with an announcement indicating that a conference call is being set up.

## Patent Application

1 18. The method according to claim 17, further including the step of providing a message  
2 from a central telephone switch to said intelligent transceiver indicating that said step of  
3 setting up another active call with said conference-to directory number is proceeding.

1 19. The method according to claim 18, further including the step of sending a hold  
2 message from said intelligent transceiver to said intelligent server so as to trigger said active  
3 call being placed on hold.

1 20. The method according to claim 19, further including the step of providing a message  
2 from said intelligent transceiver to said intelligent server indicating that said step of setting  
3 up another active call with said conference-to directory number has proceeded so as to set up  
4 said conference call successfully.

1 21. The method according to claim 20, wherein said step of connecting said active call  
2 on hold with said another active call includes the steps of:

3 retrieving said active call from hold;

4 connecting said active call on hold with said another active call on a single  
5 communication channel; and

6 releasing another communication channel on which said another active call was  
7 established.

## Patent Application

22. The system according to claim 21, wherein said intelligent transceiver is a voice access port, said intelligent server is a network server platform, and said central telephone switch is a local digital switch.

23. A system for handling a telephone call to a mobile station, comprising:  
a central telephone switch for creating a voice path between said mobile station and at least one other user communication device;  
an intelligent server coupled to said central telephone switch for receiving a feature request message and determining whether said mobile station is authorized to receive a conference call feature requested; and  
an intelligent radio transceiver for receiving a call transfer request from said mobile station and placing an active call on hold while a conference-to directory number is contacted.

24. The system according to claim 23, wherein said intelligent server sends a conference call set up approved message to said intelligent radio transceiver.

25. The system according to claim 24, further comprising:  
a voice processing unit for providing an announcement to at least one party of said active call instructing that a conference call is being initiated.

26. The system according to claim 25, further comprising:

## Patent Application

2 a digital signal processor for providing noise to a voice channel of said at least one  
3 other user communication device and wherein the announcement is provided to at least said  
4 mobile station so as to indicate that said conference call is being initiated.

1 27. The system according to claim 26, wherein said announcement is provided  
2 repeatedly over time.

1 28. The system according to claim 27, wherein said intelligent radio transceiver is a  
2 voice access port, said central telephone switch is a local digital switch, and said intelligent  
3 server is a network server platform.

1 29. The system according to claim 28, further comprising a remote digital terminal  
2 connected to said local digital switch and said voice access port.

1 30. The system according to claim 29, wherein said network service platform further  
2 comprises:

3 a memory for storing information related to a profile of the mobile station; and

4 a controller, responsive to said local digital switch, for evaluating the profile of a  
5 called party.

1 31. The system according to claim 23, further comprising a means for interrupting said  
2 conference call setup before it is completed if said conference-to directory number can not  
3 be connected.

## Patent Application

1 32. The system according to claim 23 further comprising a means to retrieve said active  
2 call placed on hold during said conference call setup.

1 33. The system according to claim 23, further comprising a means for setting up a call  
2 between said mobile station and said conference-to directory number.

1 34. The system according to claim 23, further comprising a means for enabling said  
2 mobile station to actively provide said intelligent transceiver an instruction to interrupt  
3 establishment of another active call with said conference-to directory number before an  
4 answer occurs.

1 35. The system according to claim 34, wherein said means for enabling said mobile  
2 station to actively provide said intelligent server an instruction to interrupt establishment of  
3 another active call includes a feature initiation message.

1 36. The system according to claim 35, wherein another active call setup is released from  
2 said conference call setup.

1 37. The system according to claim 36, wherein said active call is retrieved so that said at  
2 least one other user communication device is connected with a communication channel to  
3 said mobile station.

38. The system according to claim 37, wherein said at least one other user communication device is a first PSTN telephone.

39. The system according to claim 38, wherein said conference-to directory number is associated with a directory number outside a wireless centrex system.

40. The system according to claim 39, wherein said conference-to directory number is associated with a directory number within a wireless centrex system.

**B. Deleting A Party From An Existing Call**

1. A method for dropping at least one other party to a conference call with a mobile station, comprising the steps of:

- establishing an active conference call between at least two other communication devices and said mobile station;
- requesting, using an input on said mobile station, an intelligent transceiver to drop at least one party to said active conference call; and
- instructing, using said intelligent transceiver, a central telephone switch to drop said at least one party from said active conference call.

2. The method according to claim 1, further including the step of sending a conference call party drop message from said intelligent transceiver to an intelligent server.

1 3. The method according to claim 2, further comprising the step of dropping said at  
2 least one party from said active conference call.

1 4. The method according to claim 3, further including the step of sending a release  
2 message from said central telephone switch to one of said at least two other communication  
3 devices.

1 5. The method according to claim 4, further comprising the step of providing an  
2 announcement to at least one of said mobile station and said at least two other  
3 communication devices connected to said active conference call, indicating that a party is  
4 being dropped from said active conference call.

1 6. The method according to claim 5, further including the step of maintaining at least  
2 two parties on an active call.

1 7. The method according to claim 6, further including the step of querying said  
2 intelligent server for instructions on dropping said at least one party from said active  
3 conference call.

1 8. The method according to claim 7, wherein said intelligent transceiver is a voice  
2 access port, said central telephone switch is a local digital switch, and said intelligent server  
3 is a network server platform.



1 9. A method for dropping a party from a conference call with a mobile station in a  
2 wireless centrex system, comprising the steps of:  
3 providing an active conference call;  
4 providing instructions from said mobile station to an intelligent transceiver to drop  
5 said party from said active conference call;  
6 interpreting said instructions with said intelligent transceiver so as to determine that  
7 said mobile station wishes to drop said party; and  
8 dropping said party from said active conference call with a central telephone switch  
9 based on input from said intelligent transceiver.

1 10. The method according to claim 9, further including the step of notifying an  
2 intelligent server that said party has been dropped from said active conference call, by  
3 sending a message from said intelligent transceiver.

1 11. The method according to claim 10, further including the step of instructing at least  
2 one other communication device to release said party from said active conference call, by  
3 sending a message from said central telephone switch.

1 12. The method according to claim 11, further comprising the step of providing an  
2 announcement to at least one of a plurality of parties to said active conference, indicating  
3 that said party is being dropped from said active conference call.

## Patent Application

1 13. The method according to claim 12, further including the step of maintaining at least  
2 two parties on an active call.

1 14. The method according to claim 13, further including the step of querying said  
2 intelligent server for instructions on dropping at least one party from said active conference  
3 call.

1 15. The method according to claim 14, wherein said intelligent transceiver is a voice  
2 access port, said central telephone switch is a local digital switch, and said intelligent server  
3 is a network server platform.

1 16. A system for handling a telephone call to a mobile station, comprising:  
2 a central telephone switch for creating a voice path between said mobile station and  
3 at least one other user communication device;  
4 an intelligent server coupled to said central telephone switch for receiving a feature  
5 request message and determining whether said mobile station is authorized to receive a  
6 conference call feature requested; and  
7 an intelligent radio transceiver for receiving a message to drop a party from a  
8 conference call and dropping said party from said conference call.

1 17. The method according to claim 16, wherein said intelligent transceiver is a voice  
2 access port, said central telephone switch is a local digital switch, and said intelligent server  
3 is a network server platform.

1 18. The system according to claim 17, further comprising:  
2 a voice processing unit for providing an announcement to at least one party of said  
3 active conference call instructing that said party will be dropped from said active conference  
4 call.

1 19. The system according to claim 18, further comprising:  
2 a digital signal processor for providing said announcement.

1 20. The system according to claim 19, wherein said network service platform further  
2 comprises:  
3 a memory for storing information related to a profile of said mobile station; and  
4 a controller, responsive to said local digital switch, for evaluating the profile of a  
5 party to said active conference call.

ABSTRACT

The instant invention discloses a method and system for providing a novel wireless centrex service that untethers subscribers from the immobility associated with traditional desktop telephones. Essentially, the present invention extends the benefits of wireless voice and data services to subscribers having a need to move within a plurality of localities such as business and hospital campuses.

In accordance with the invention, a wireless telephone subscriber can use a standard cellular/PCS telephone as a wireless extension of their desktop phone, while in the proximity of a miniature radio base station capable of communicating with the PCS/cellular telephone. The advantage of such a system is that a subscriber can use the same cellular/PCS telephone that provides service in the public network in the wireless centrex environment. Additionally, the wireless centrex system provides services and features which are similar to those offered to regular centrex telephone subscribers. Exemplary features include, caller ID, call waiting, call hold, call transfer, call forwarding and voice messaging.

Fig. 1A

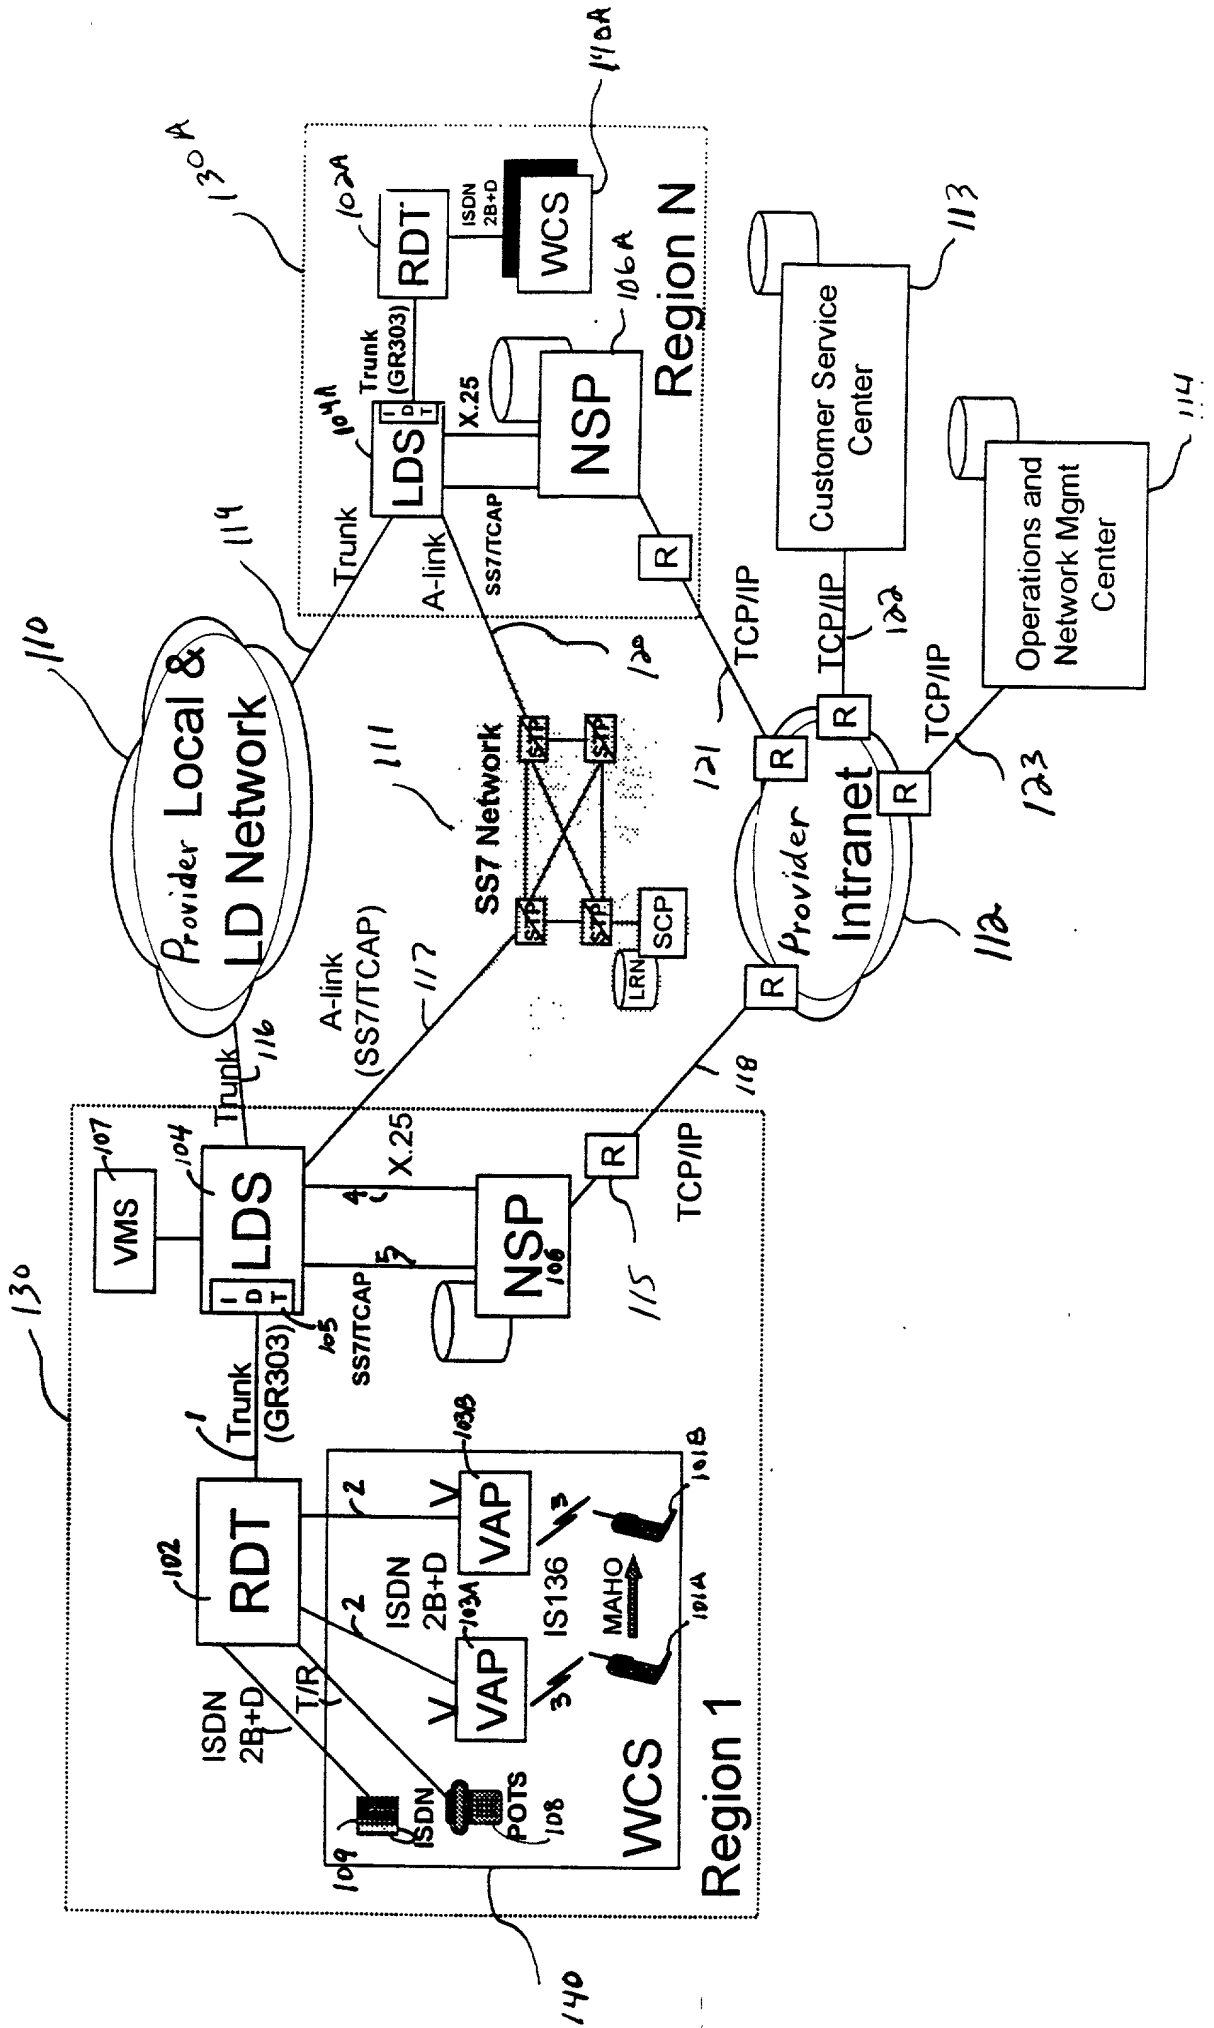


Fig. 1B

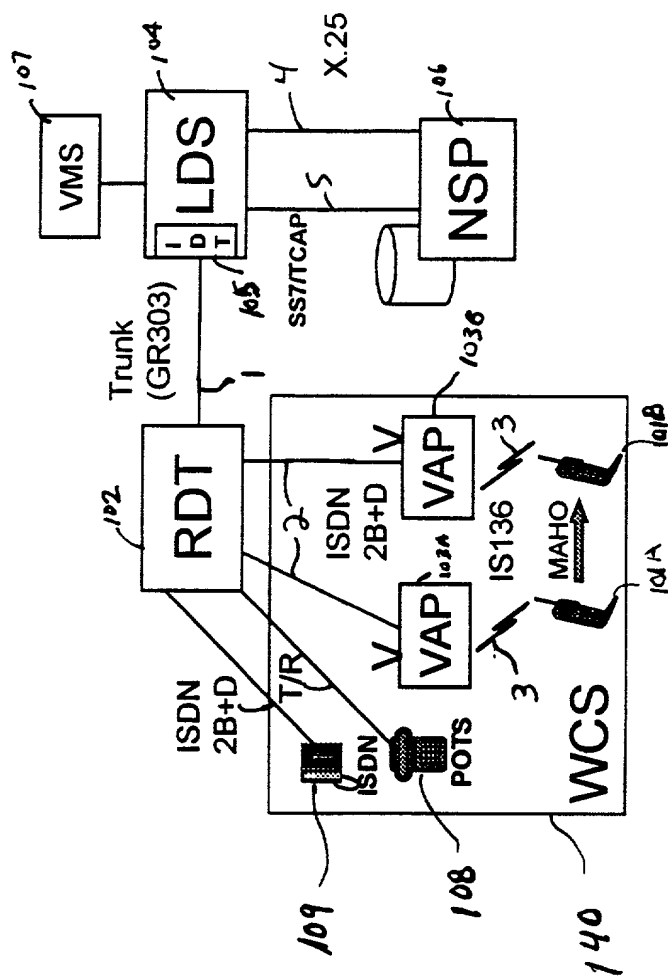


Fig. 1C

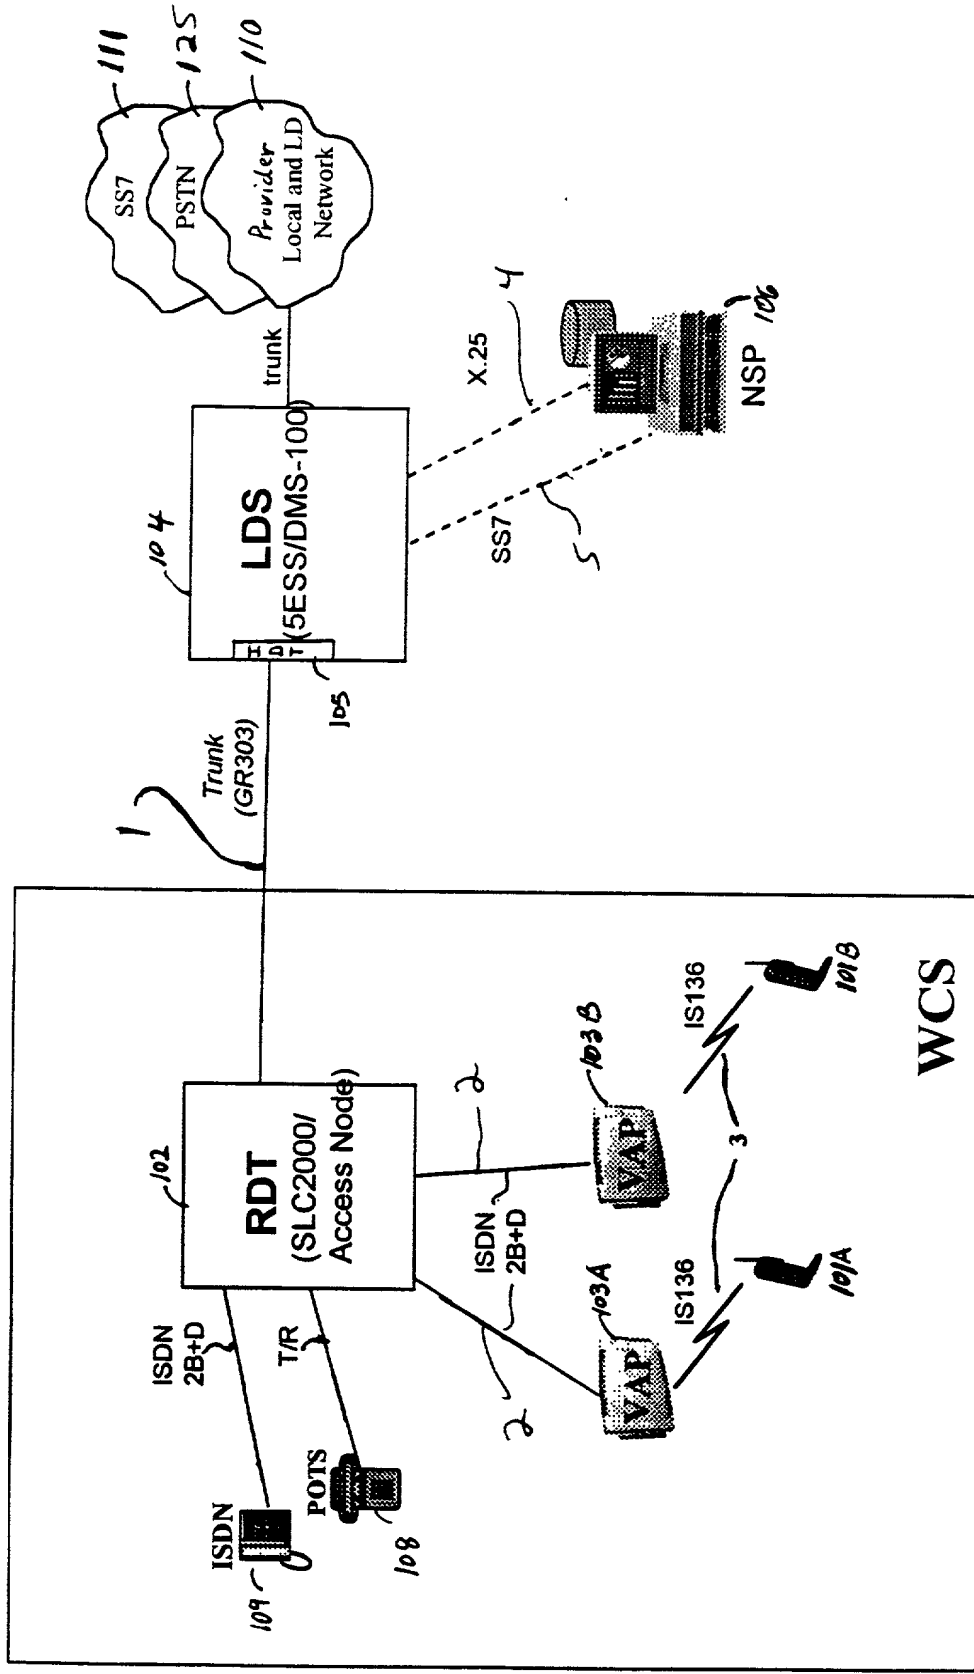


Fig. 2

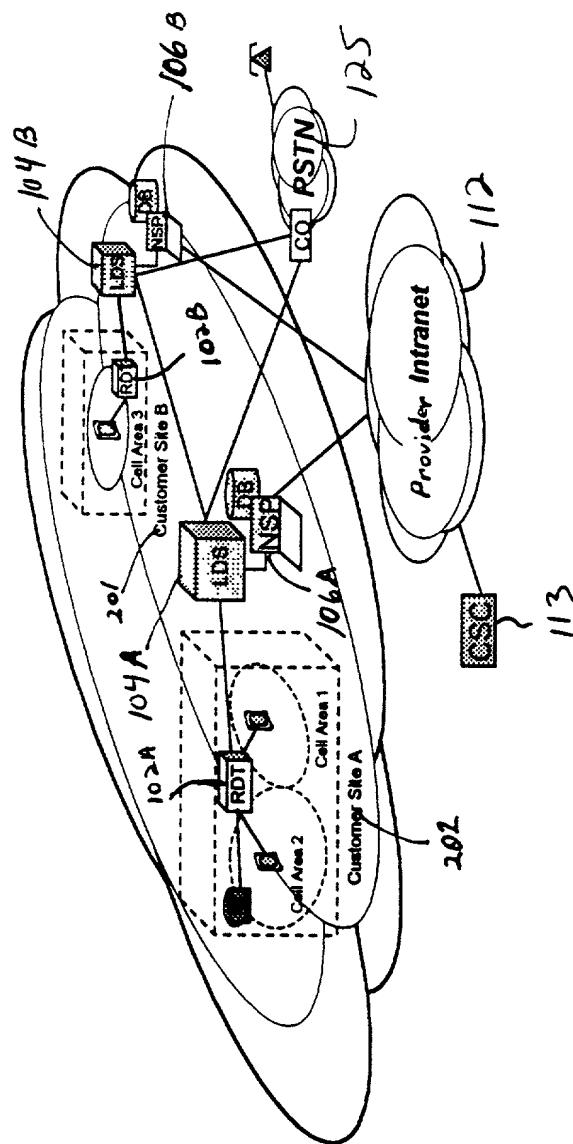






Fig. 4

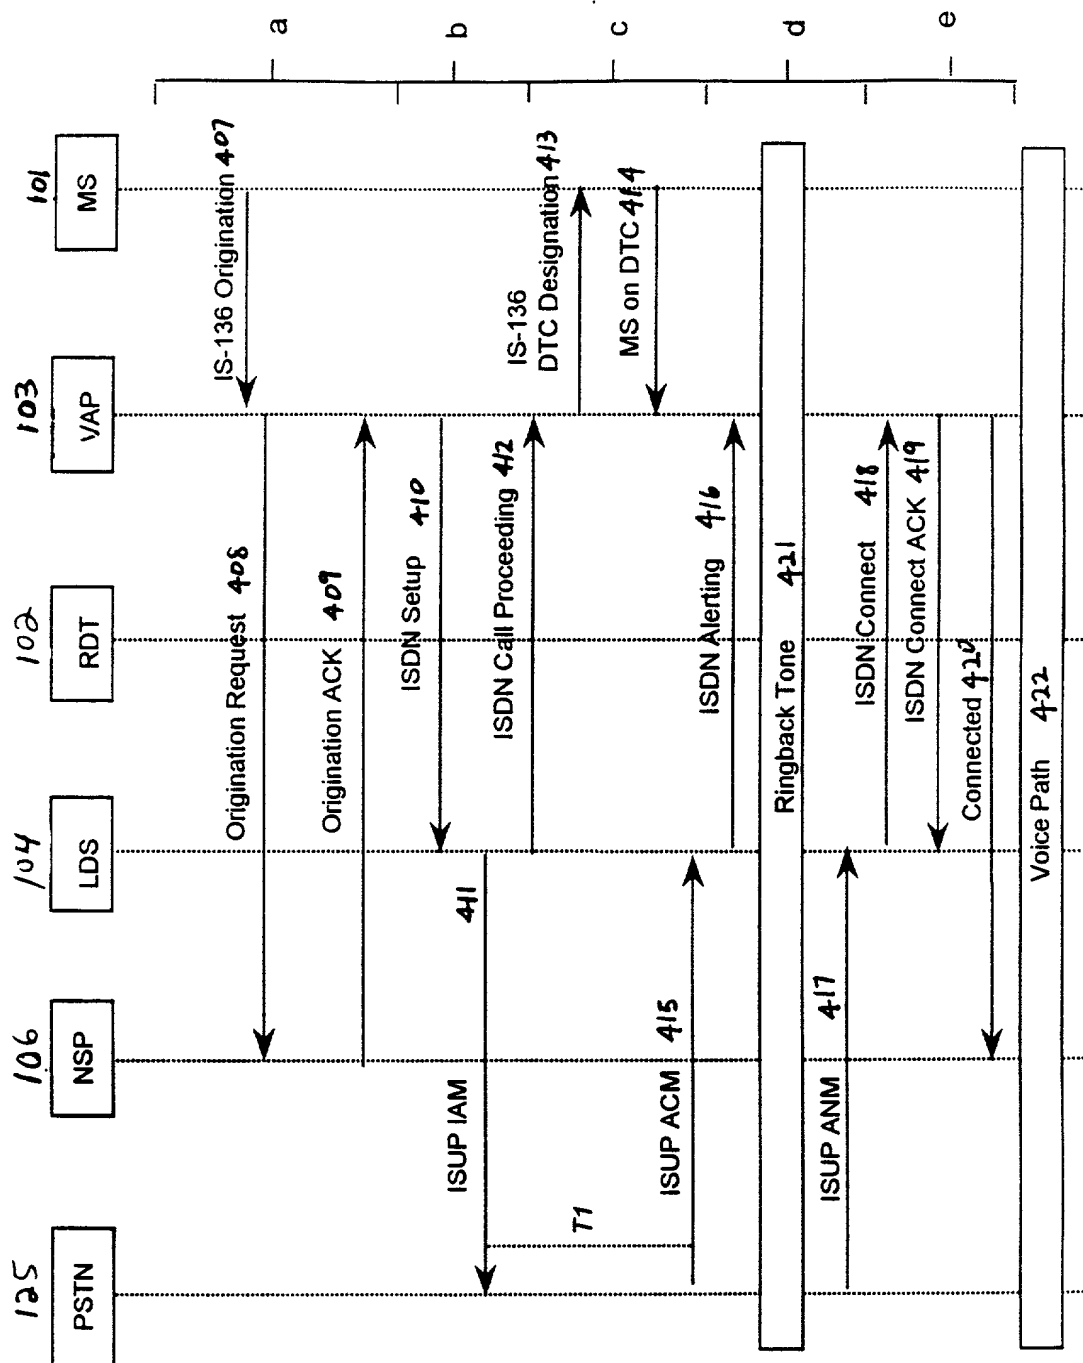


Fig. 5

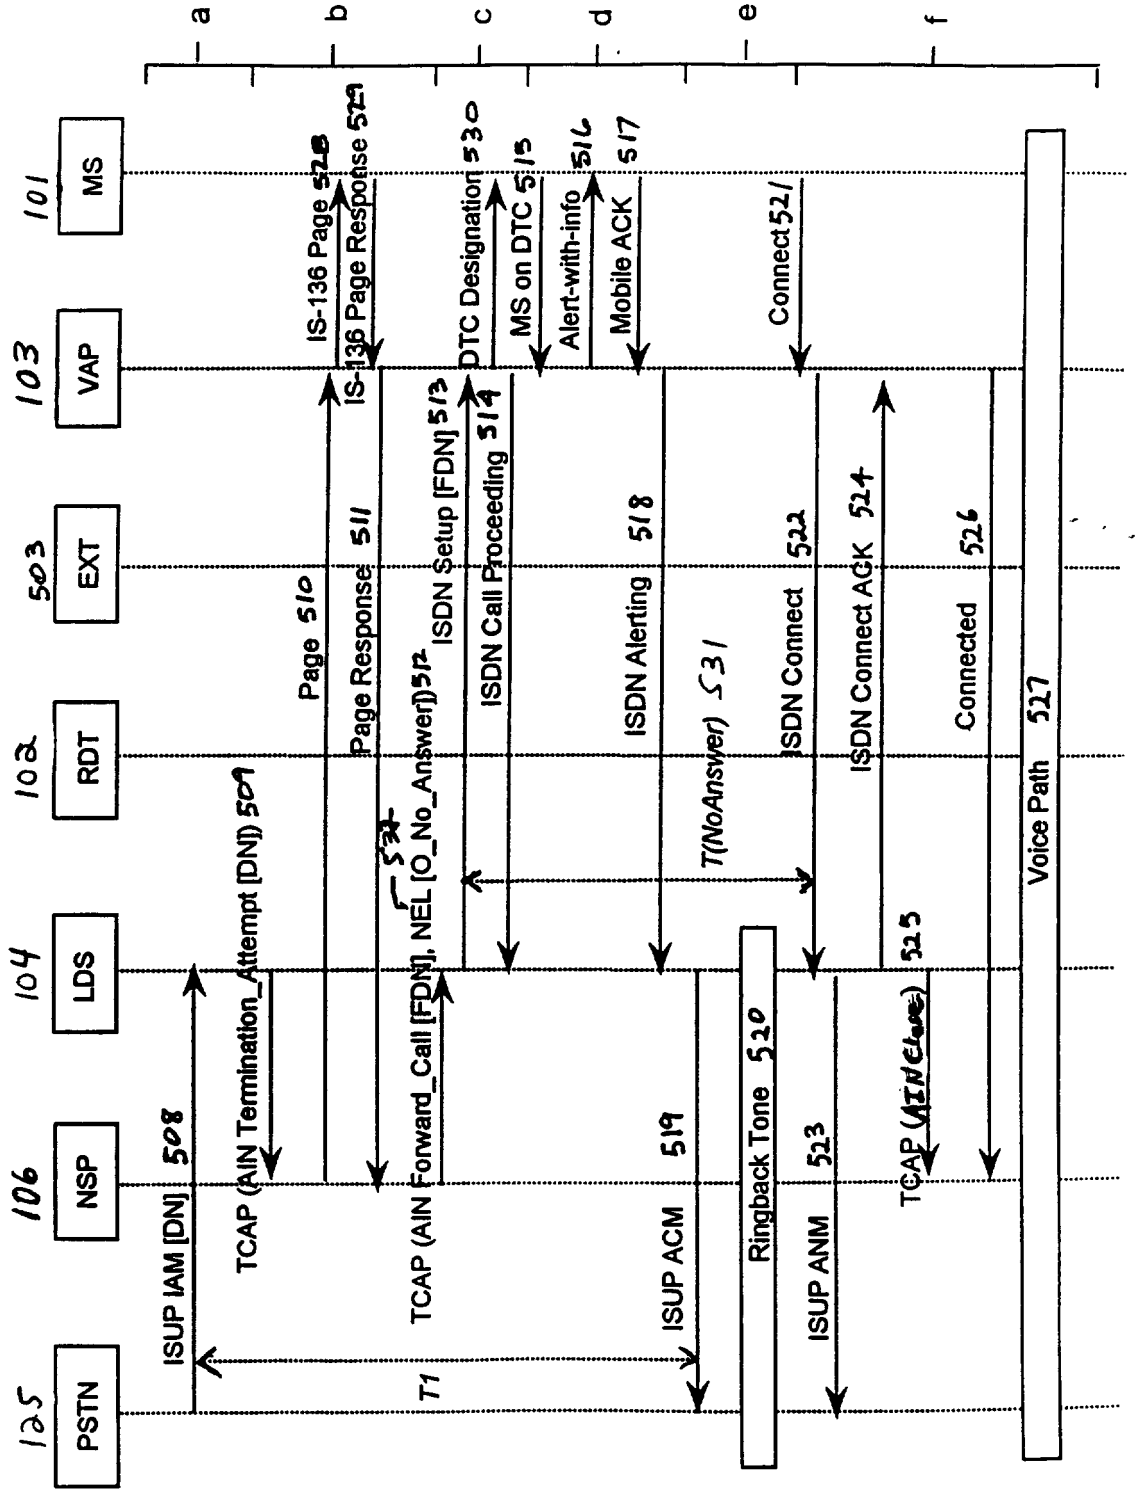


Fig. 6

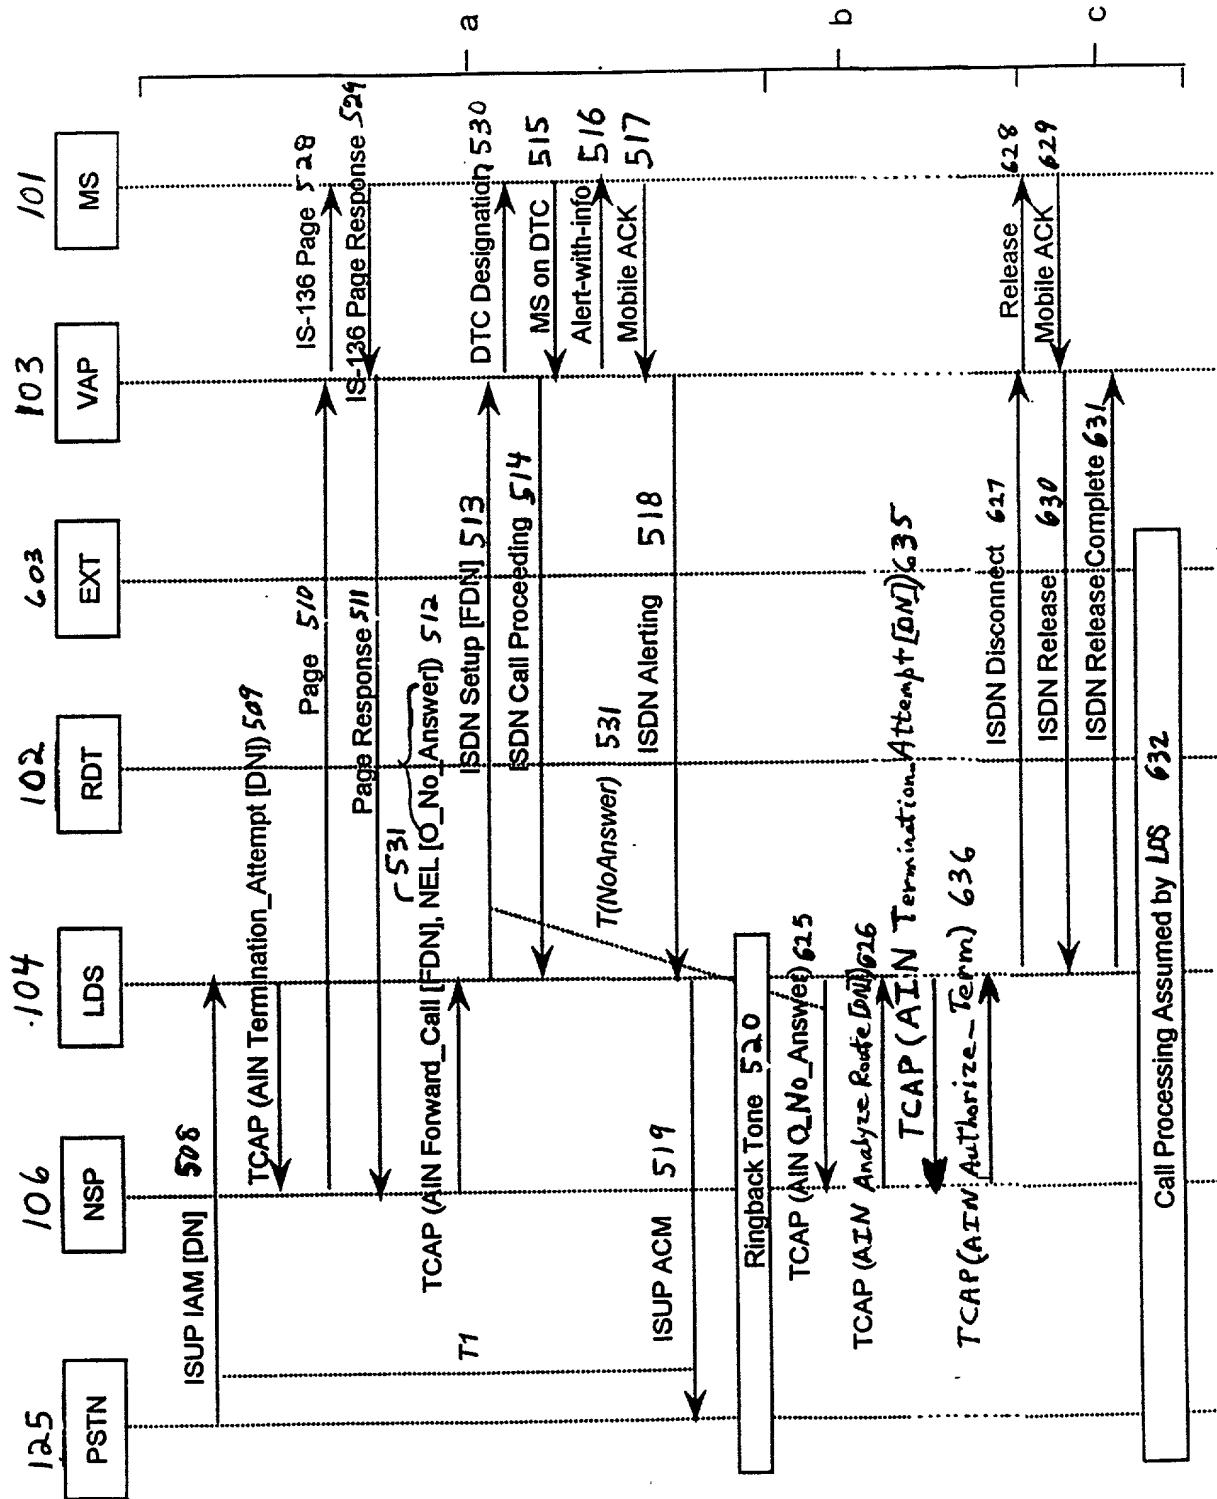


Fig. 7

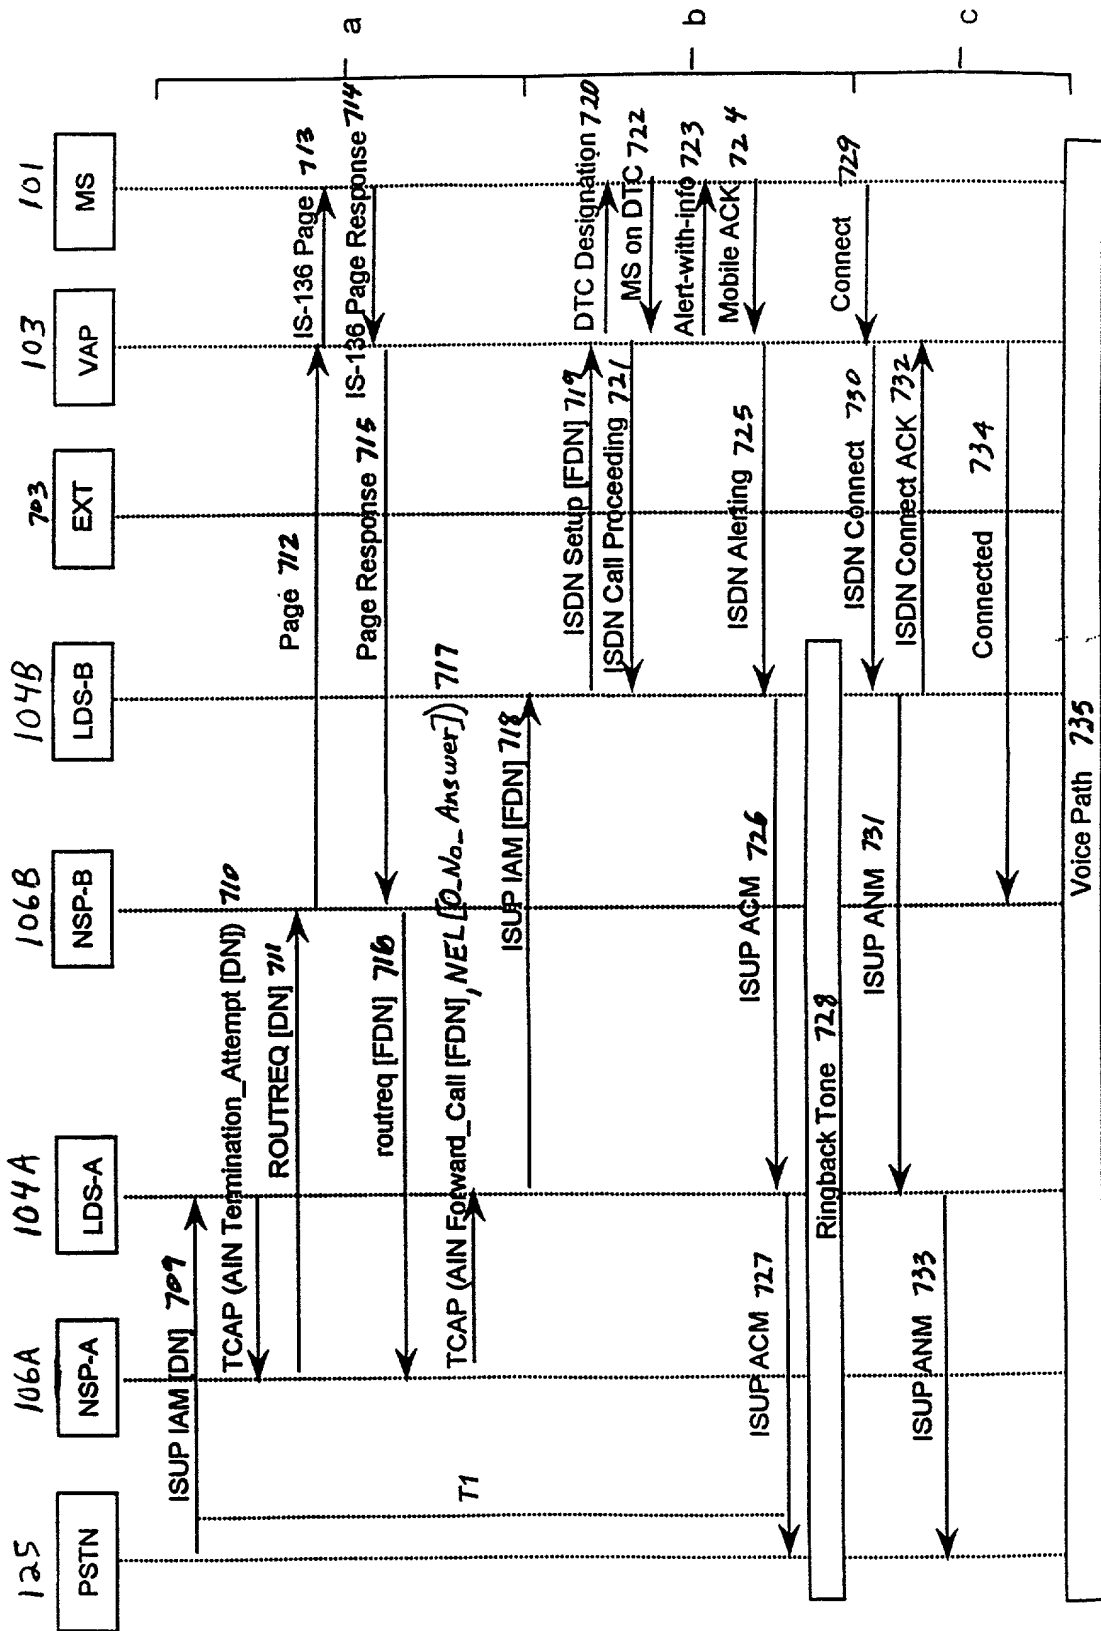


Fig. 8

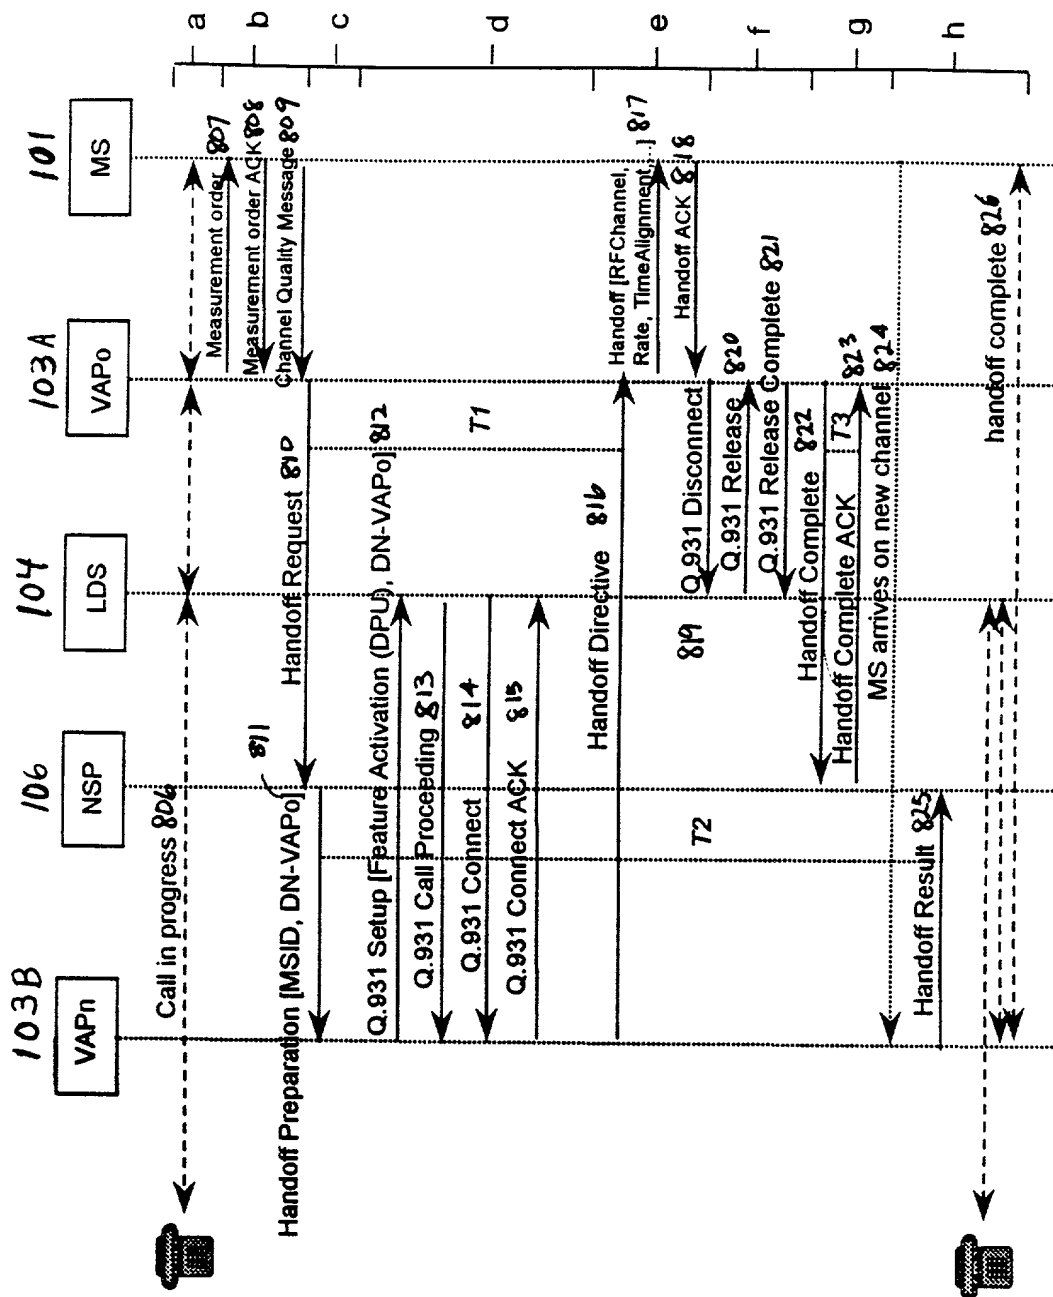
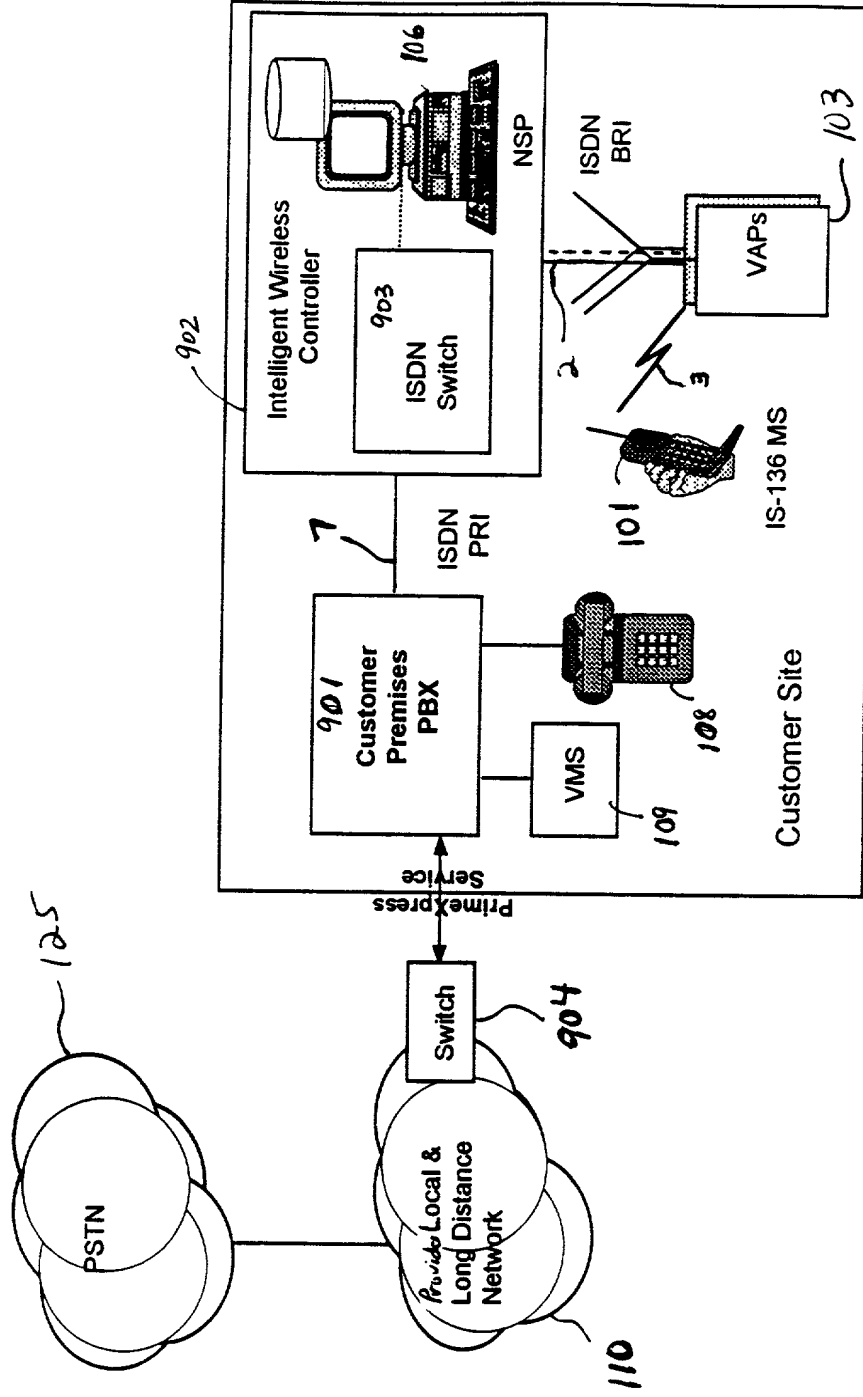


Fig. 9







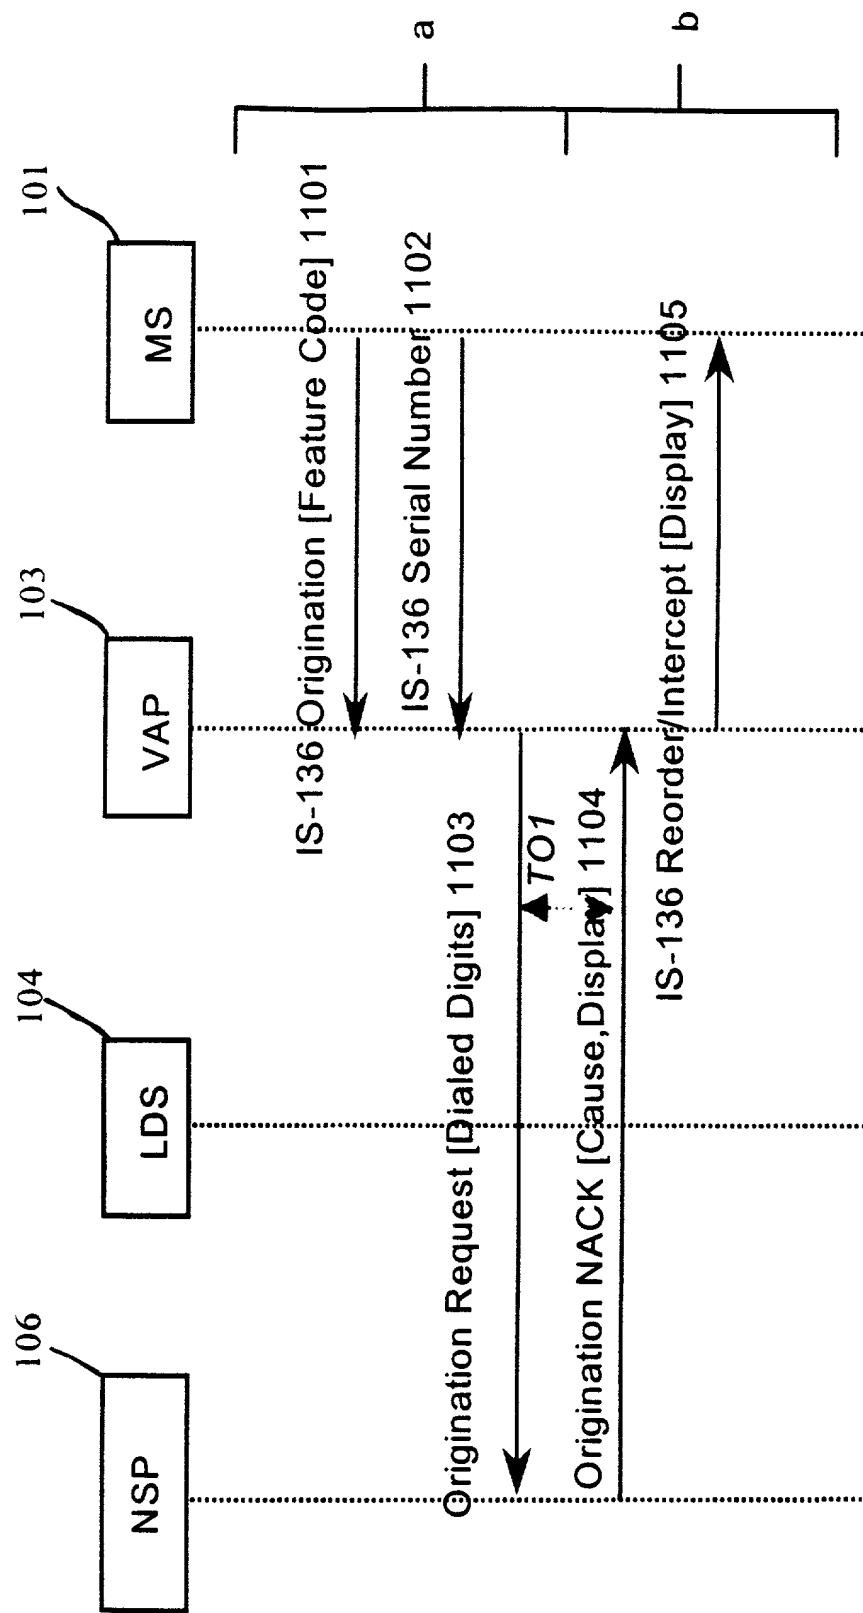


Fig. 11

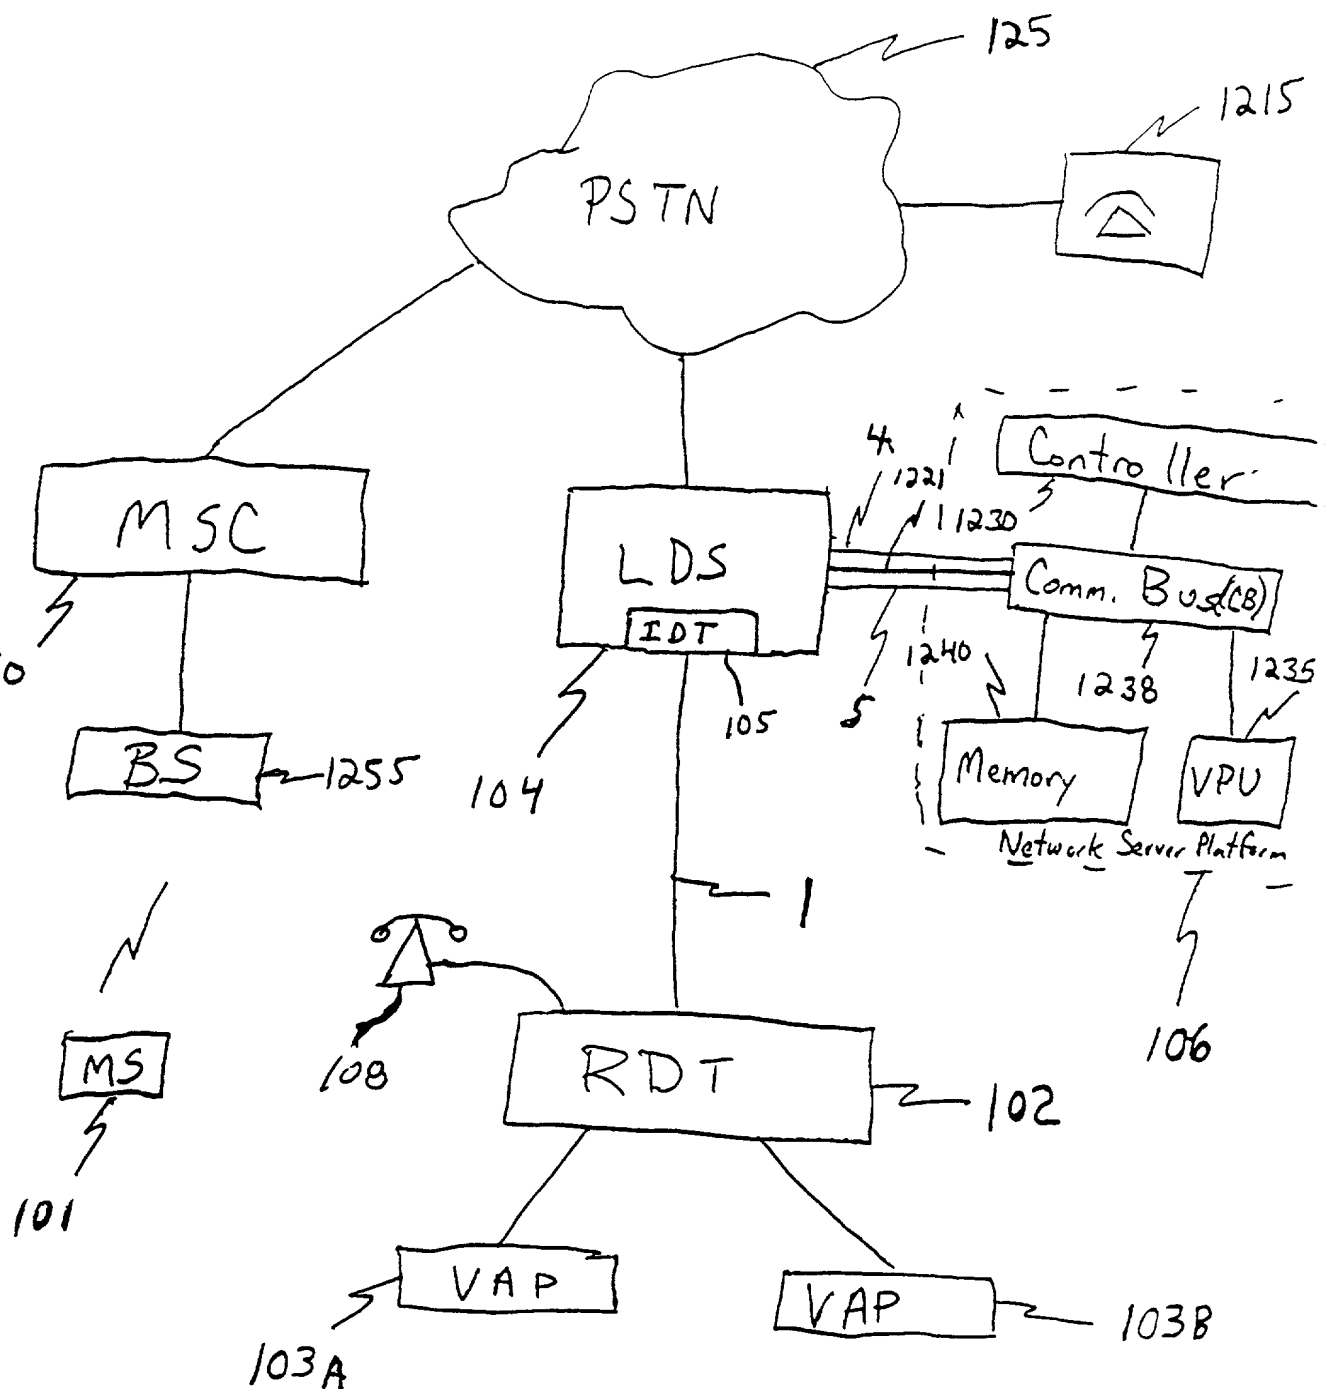


Fig. 12

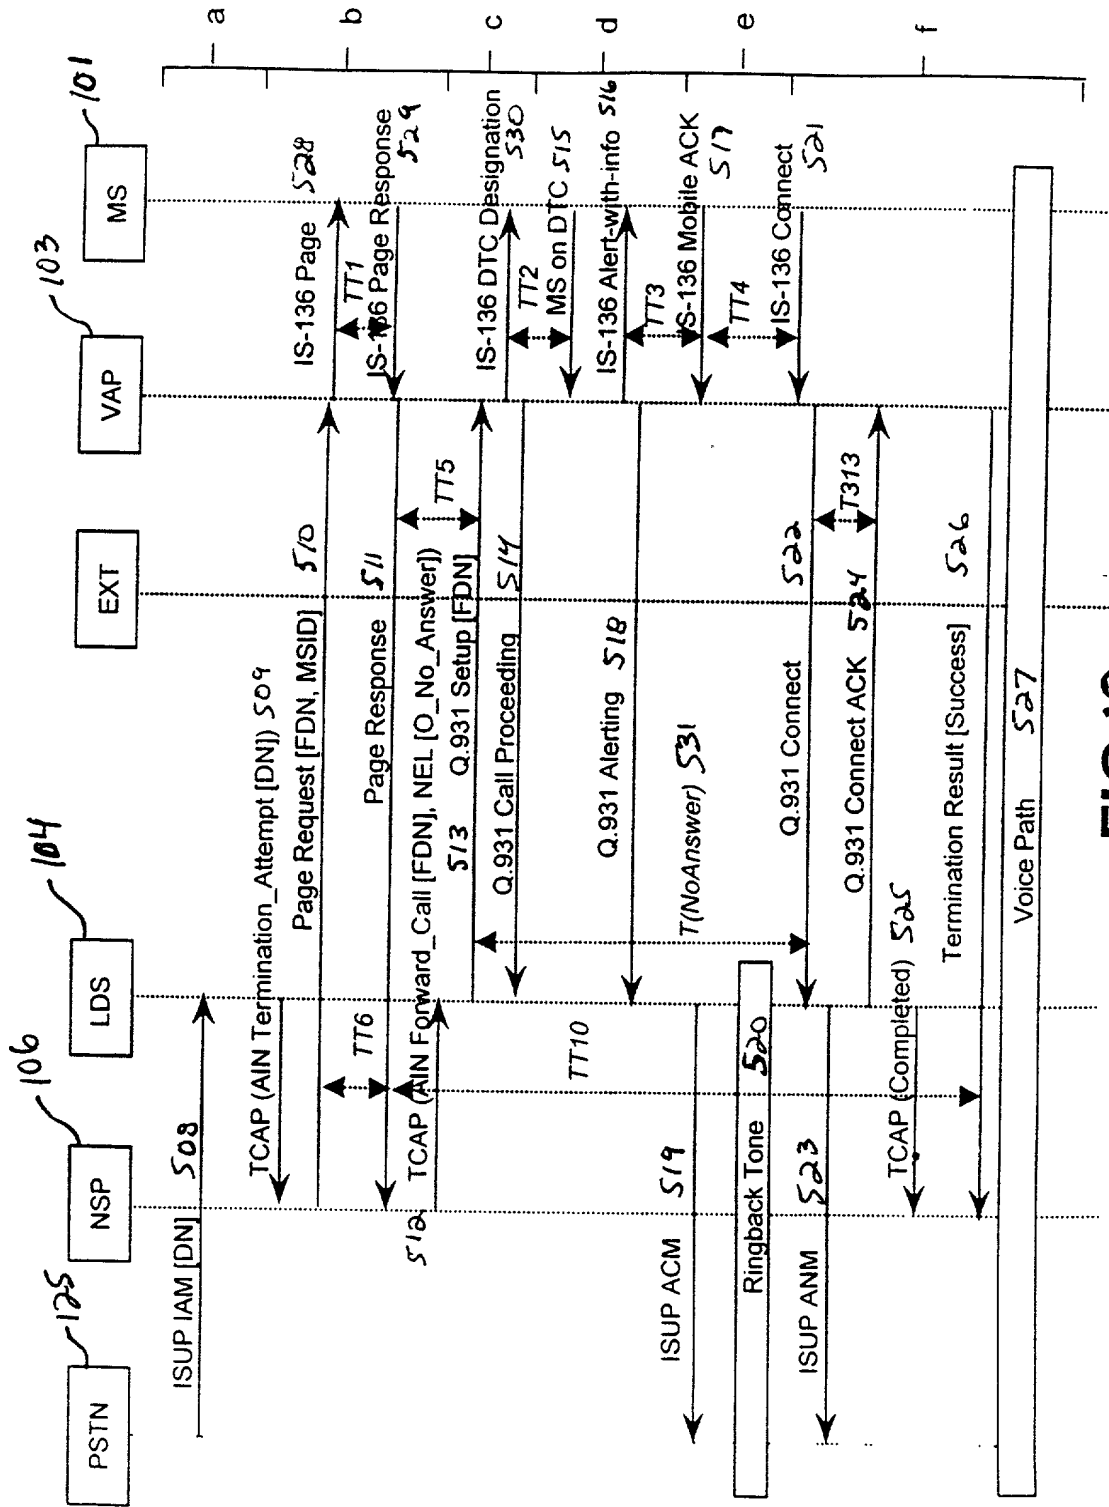
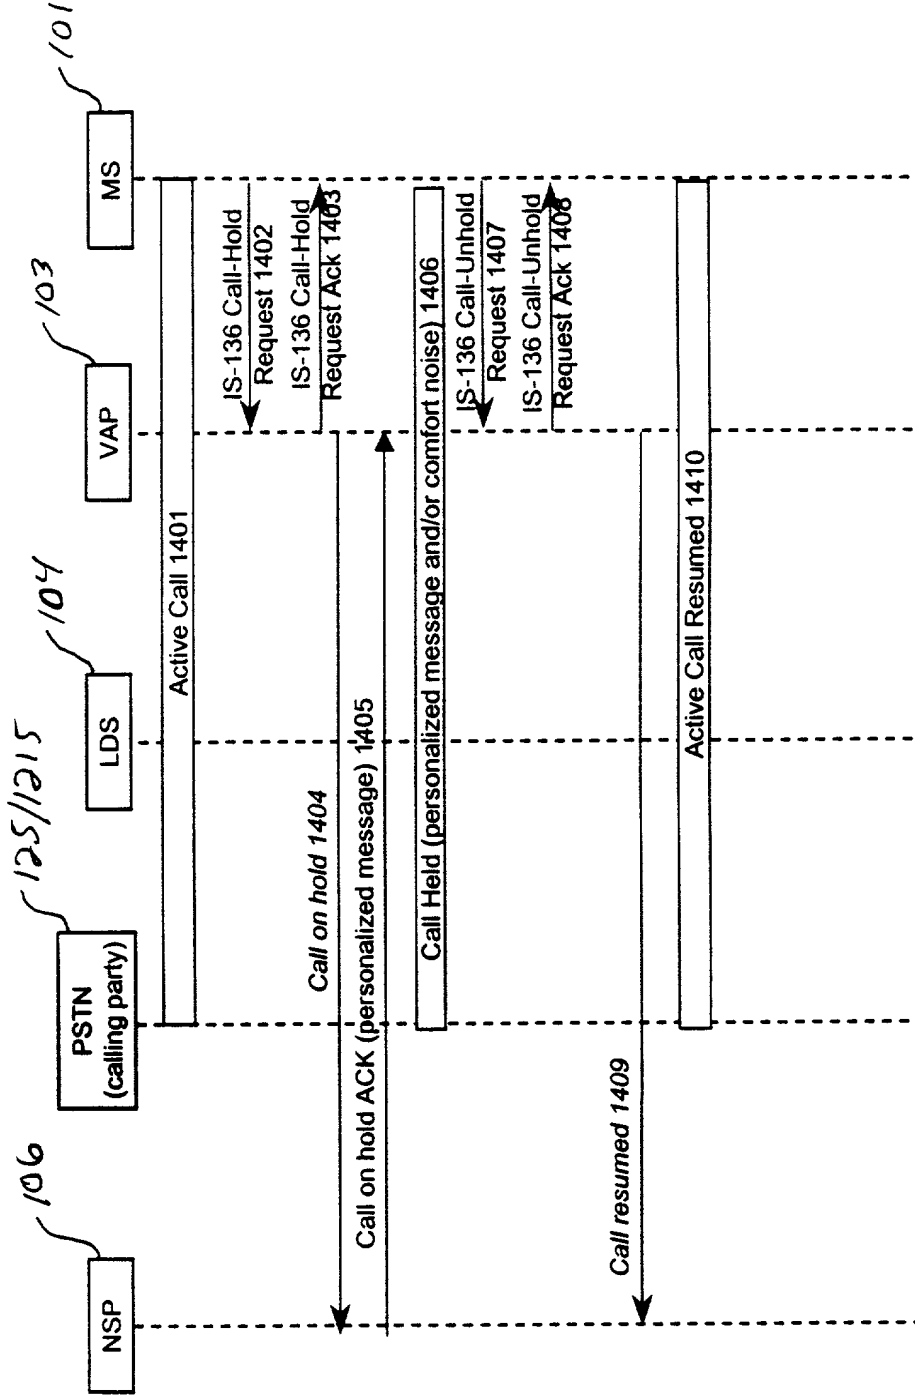


FIG.13

Fig. 14A



**Fig. 14B**

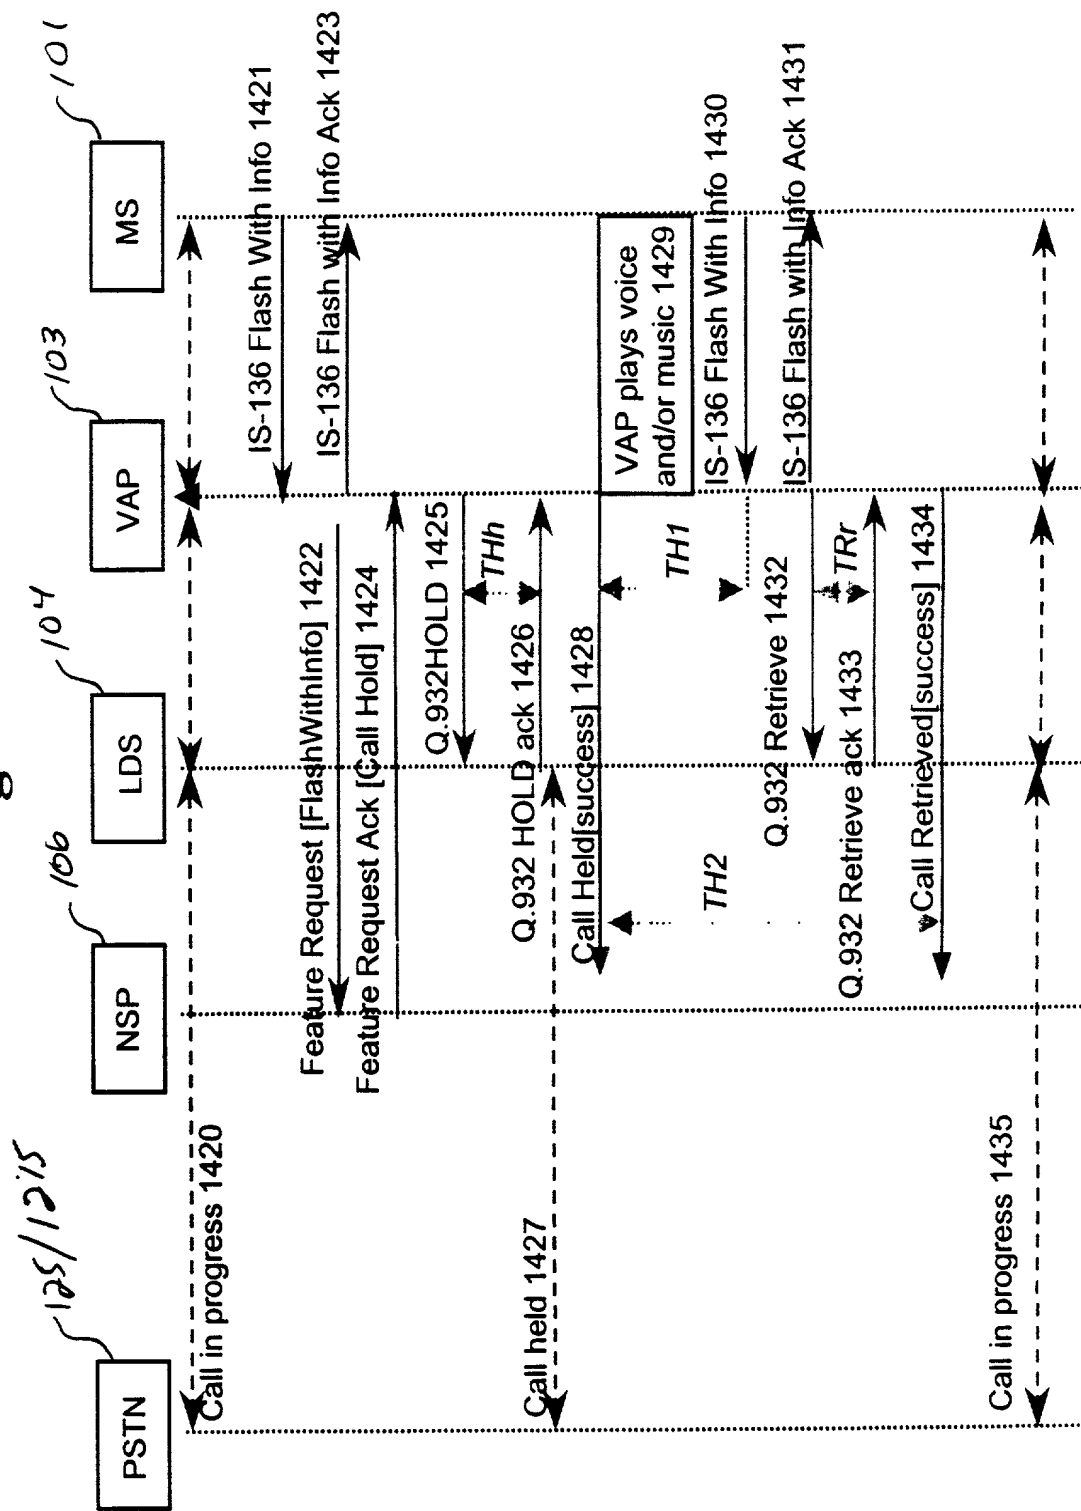


Fig. 15


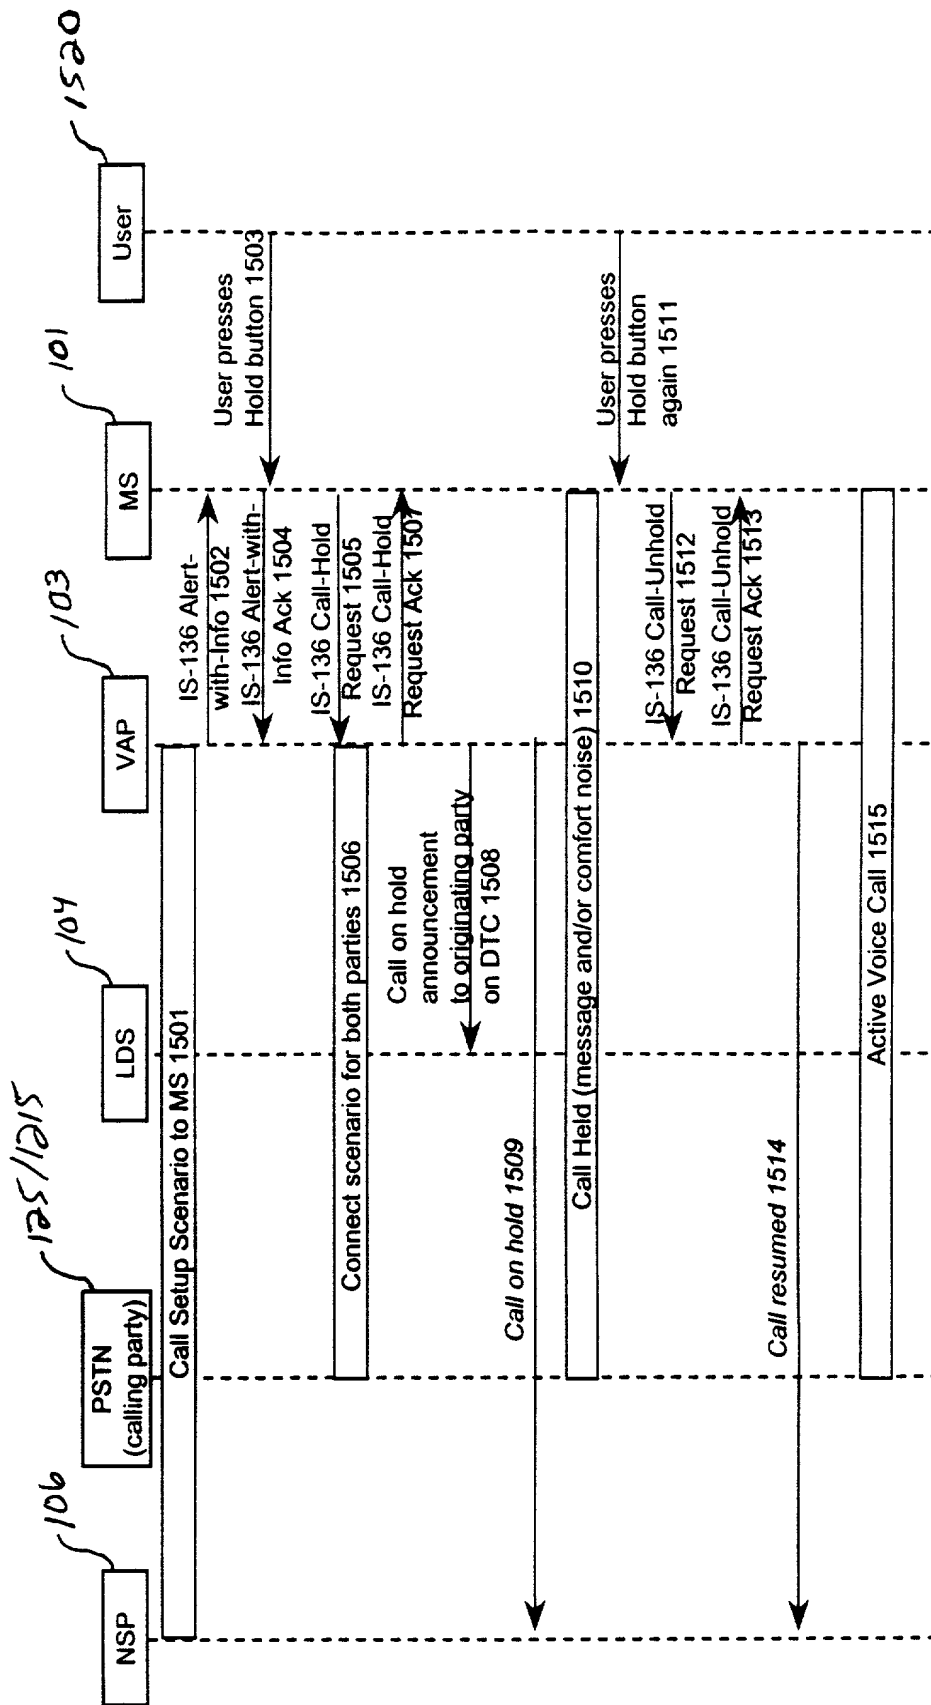


Fig. 16

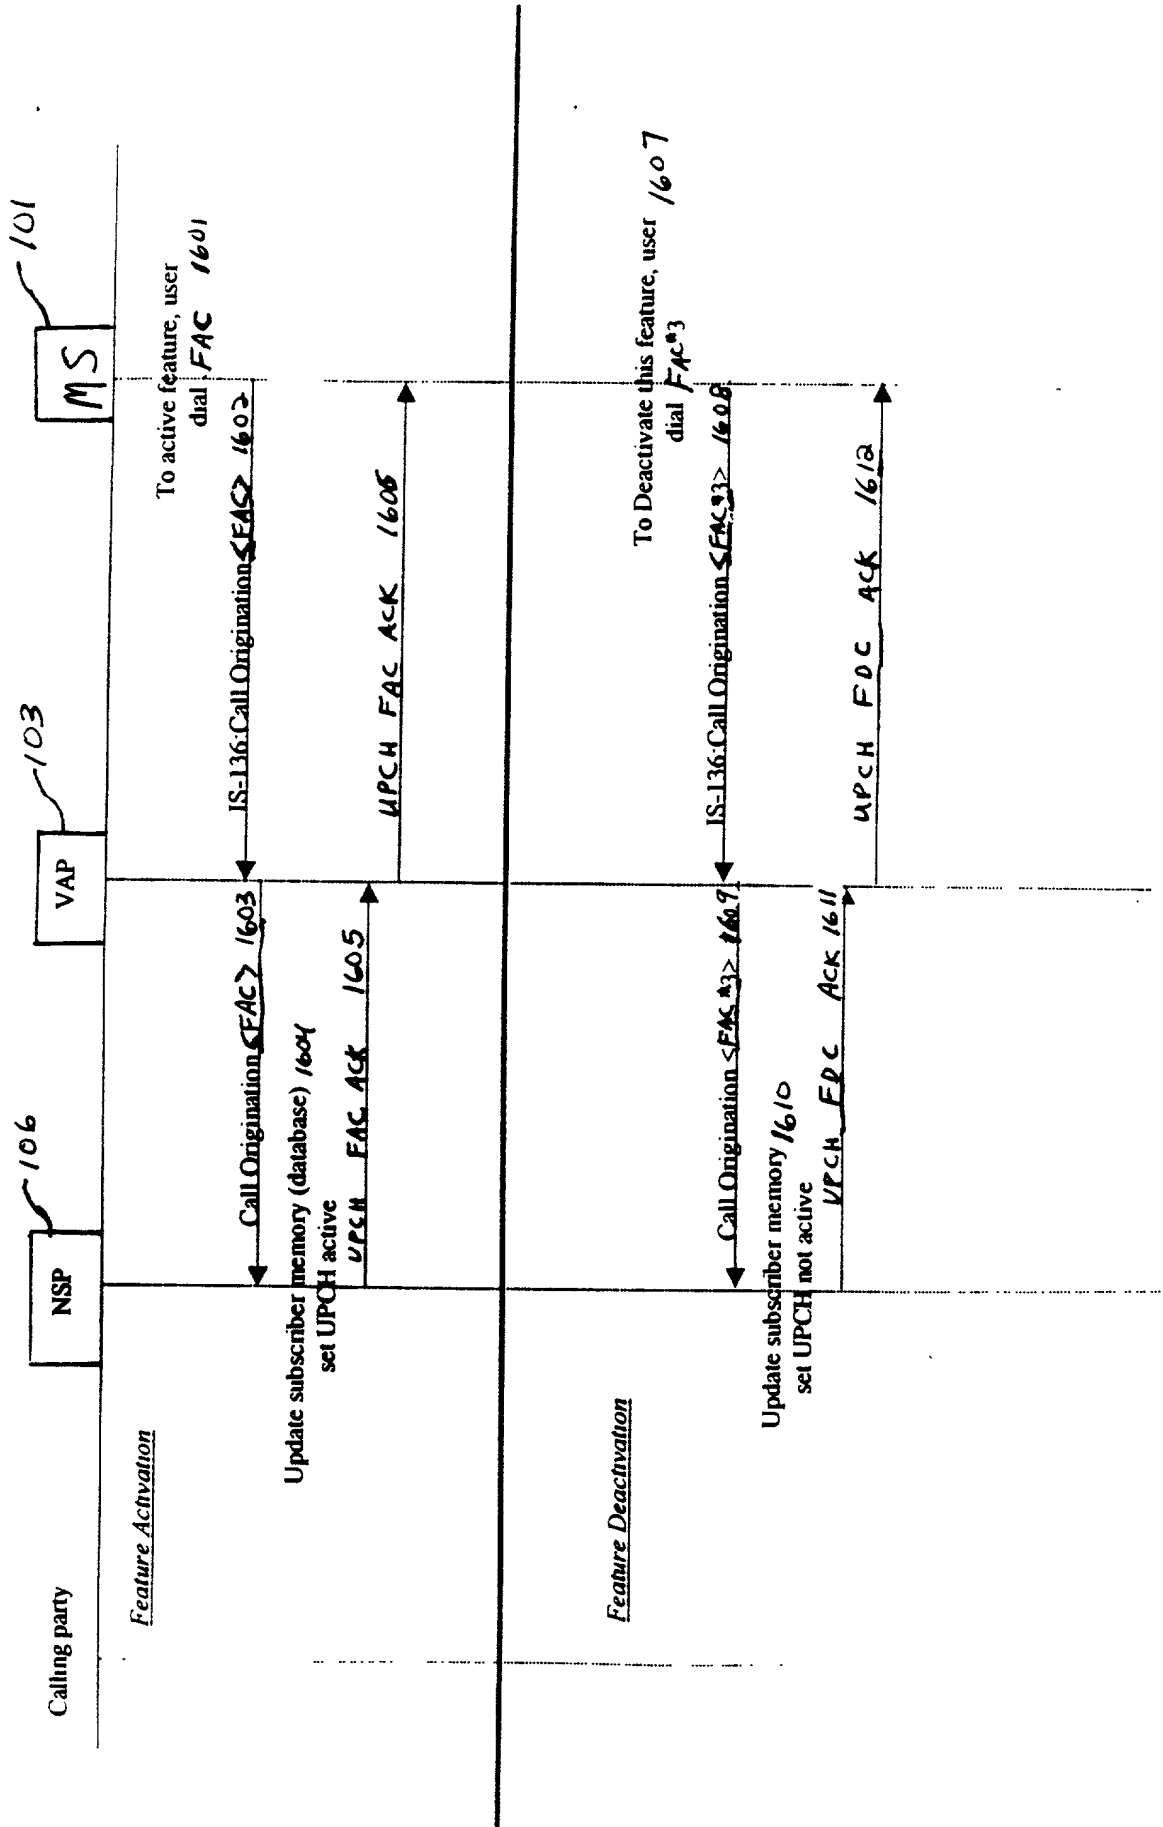

# Fig. 17



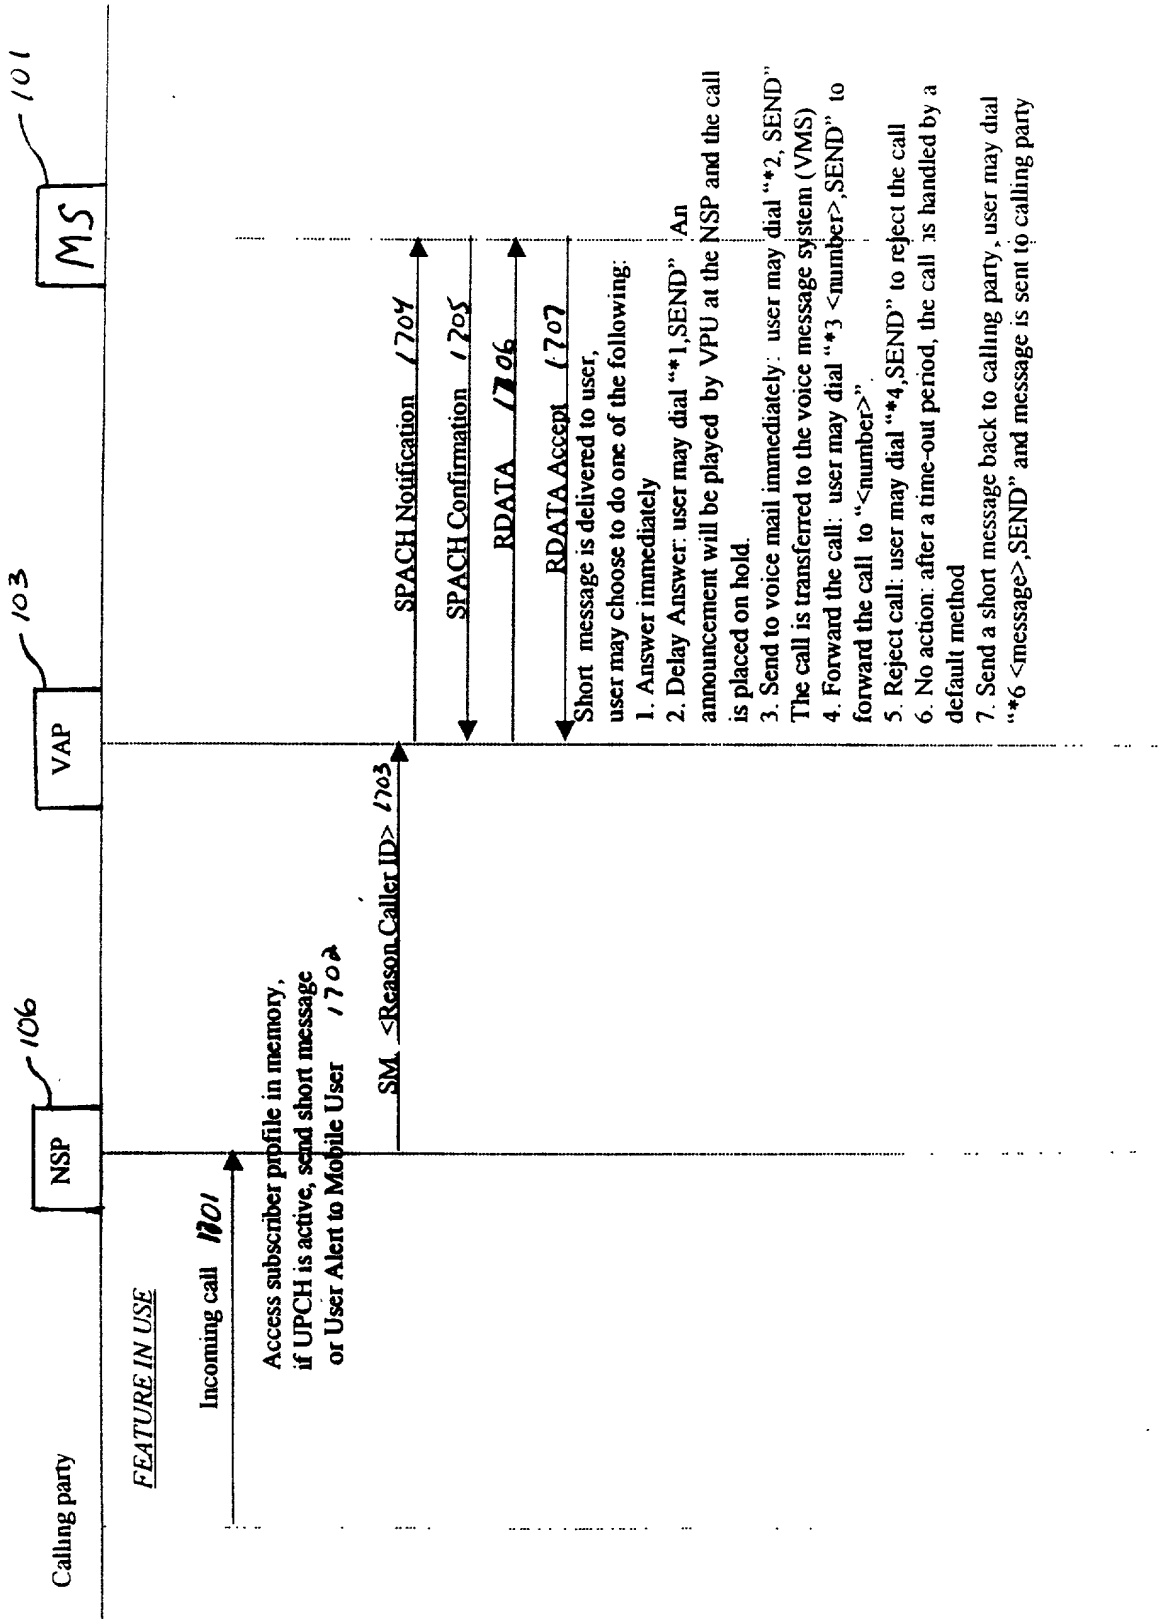




Fig. 18

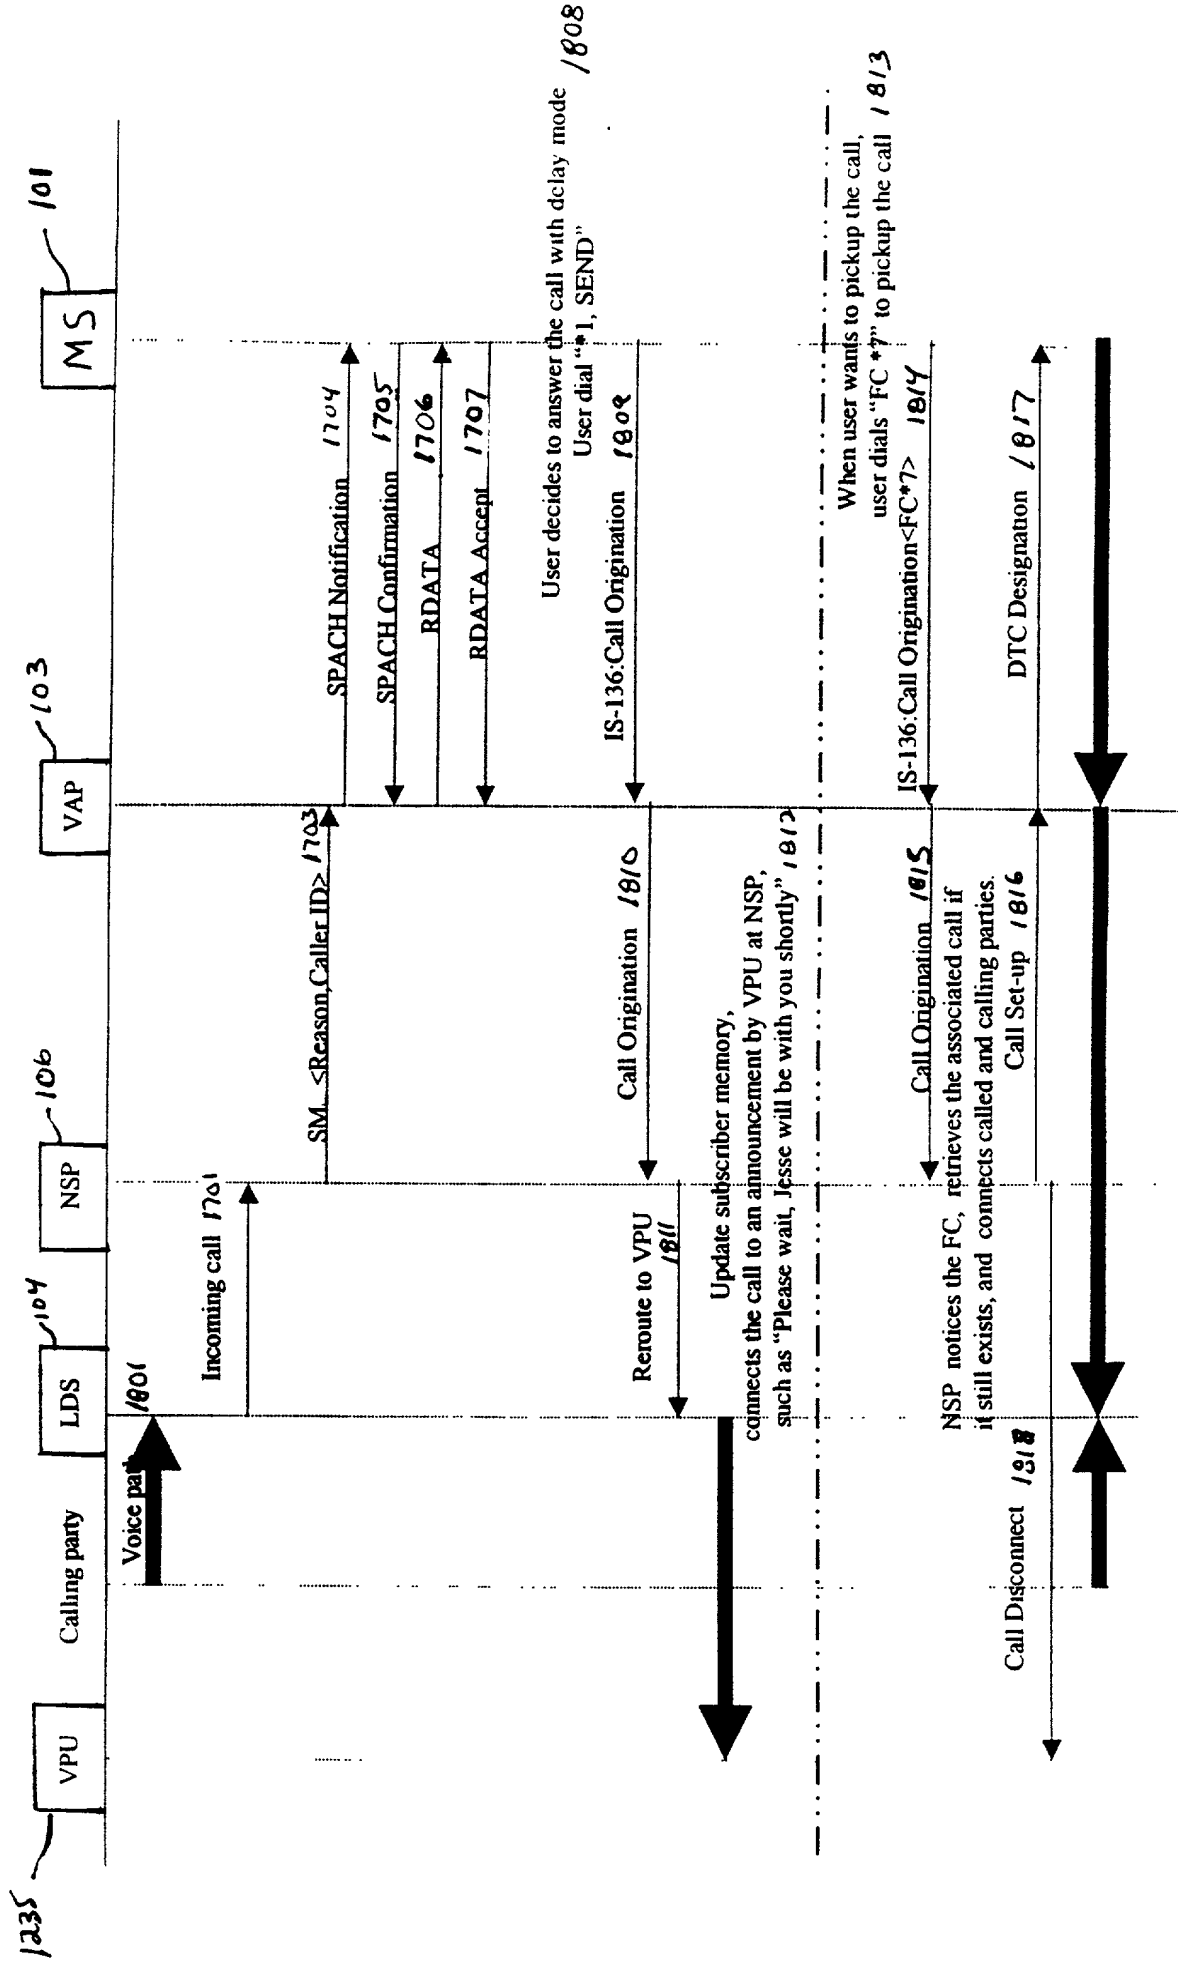

# Fig. 19

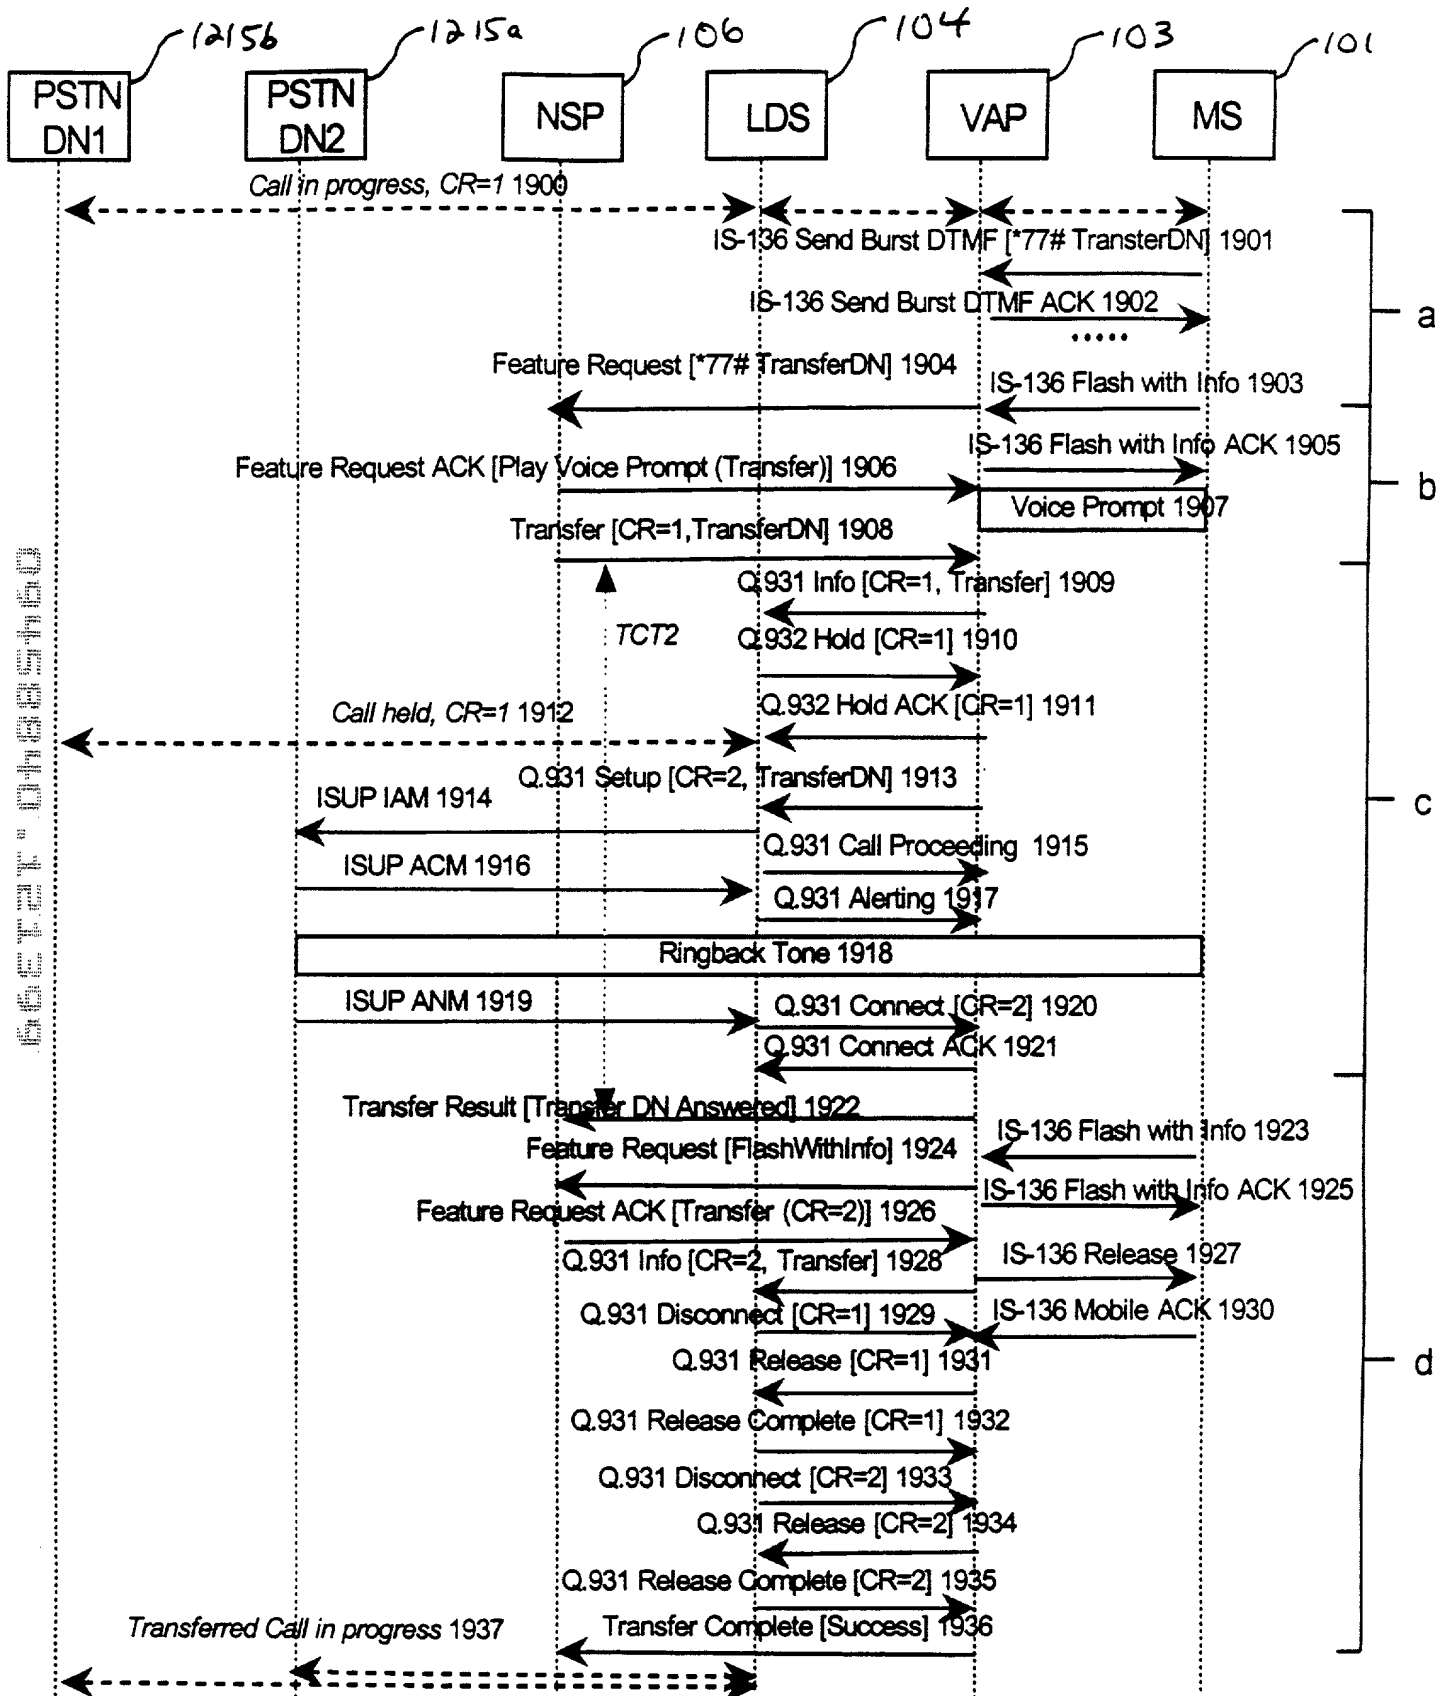

# Fig. 20

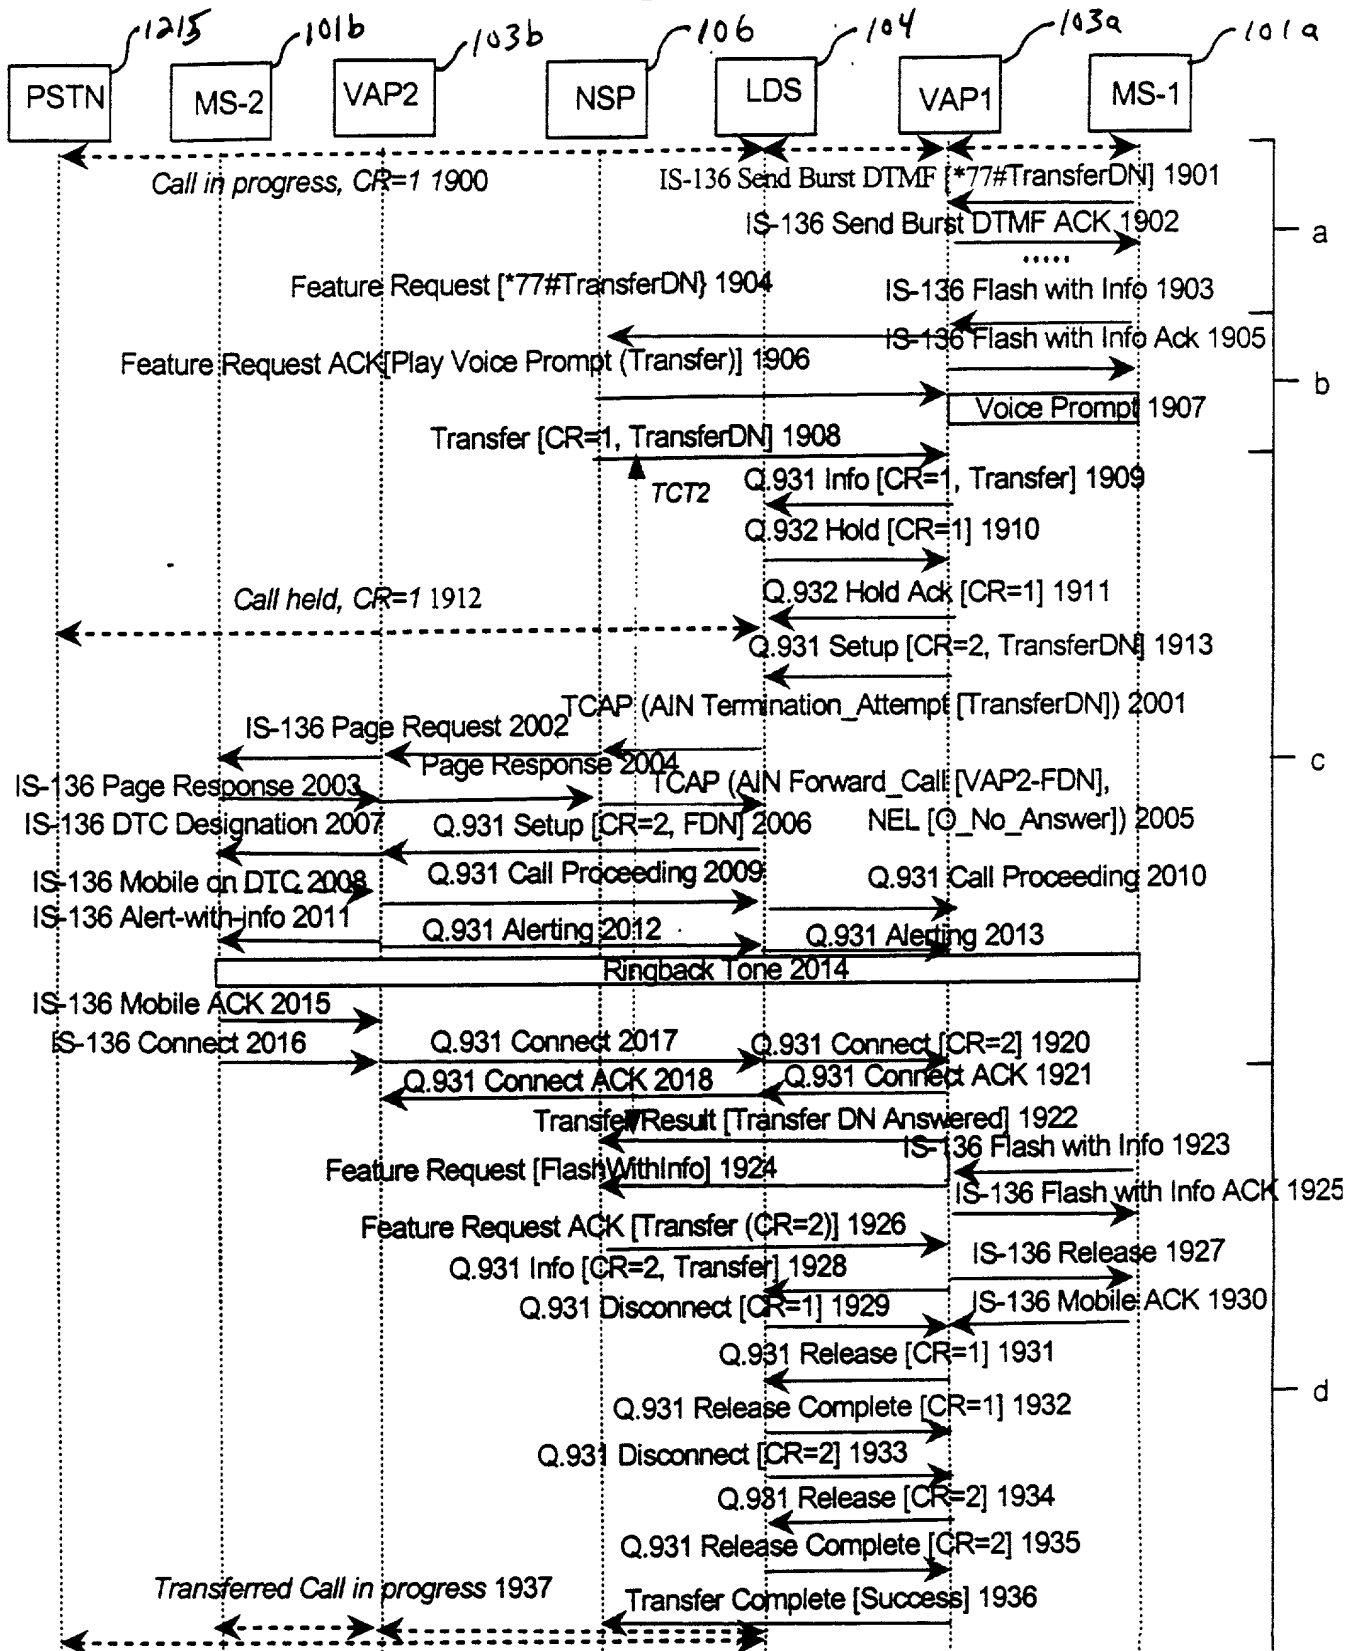


Fig. 21A

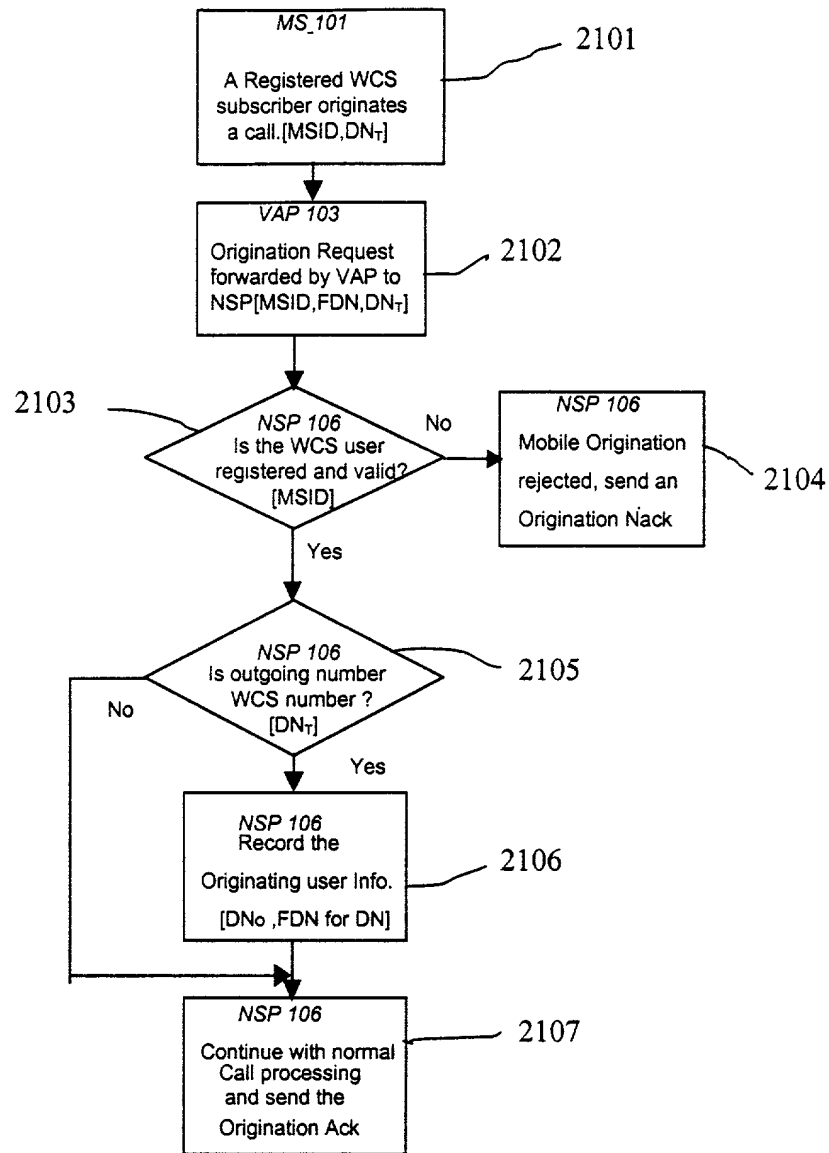


Fig. 21B

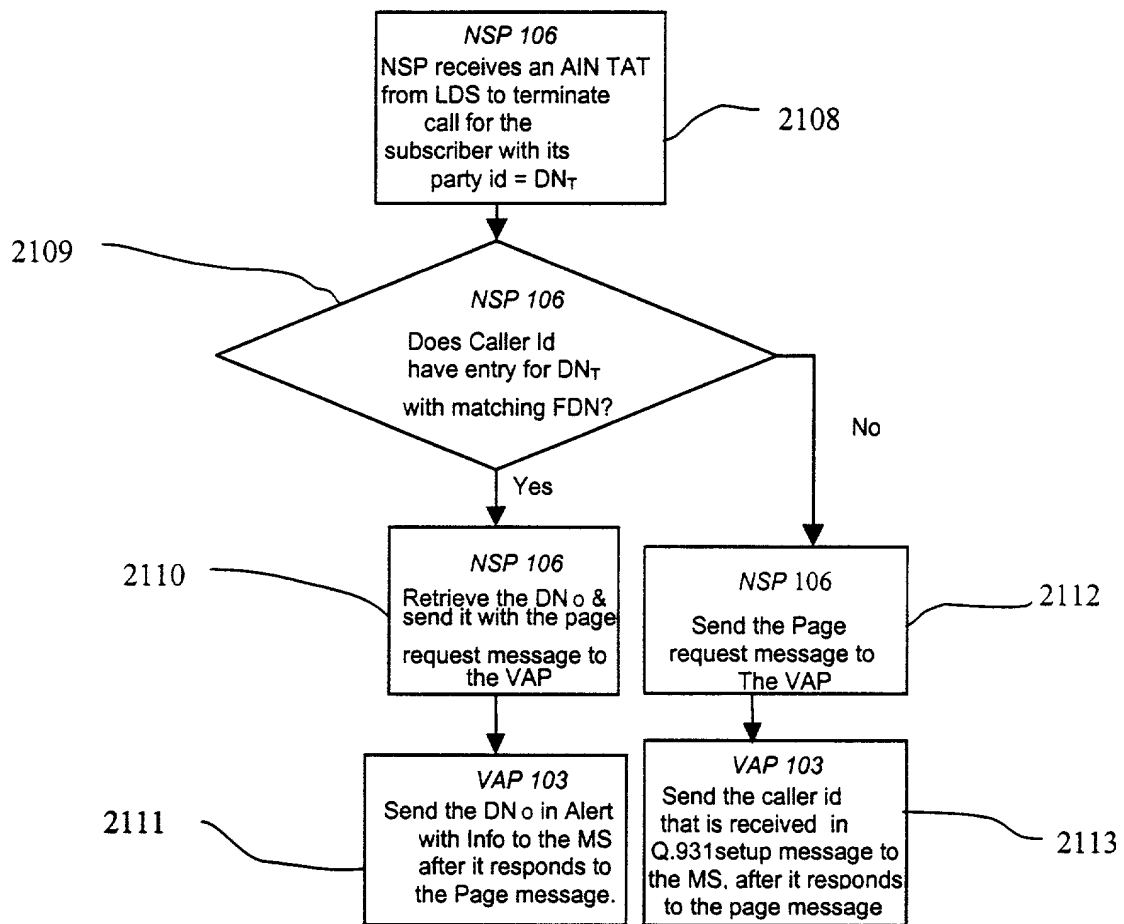


Fig. 21C

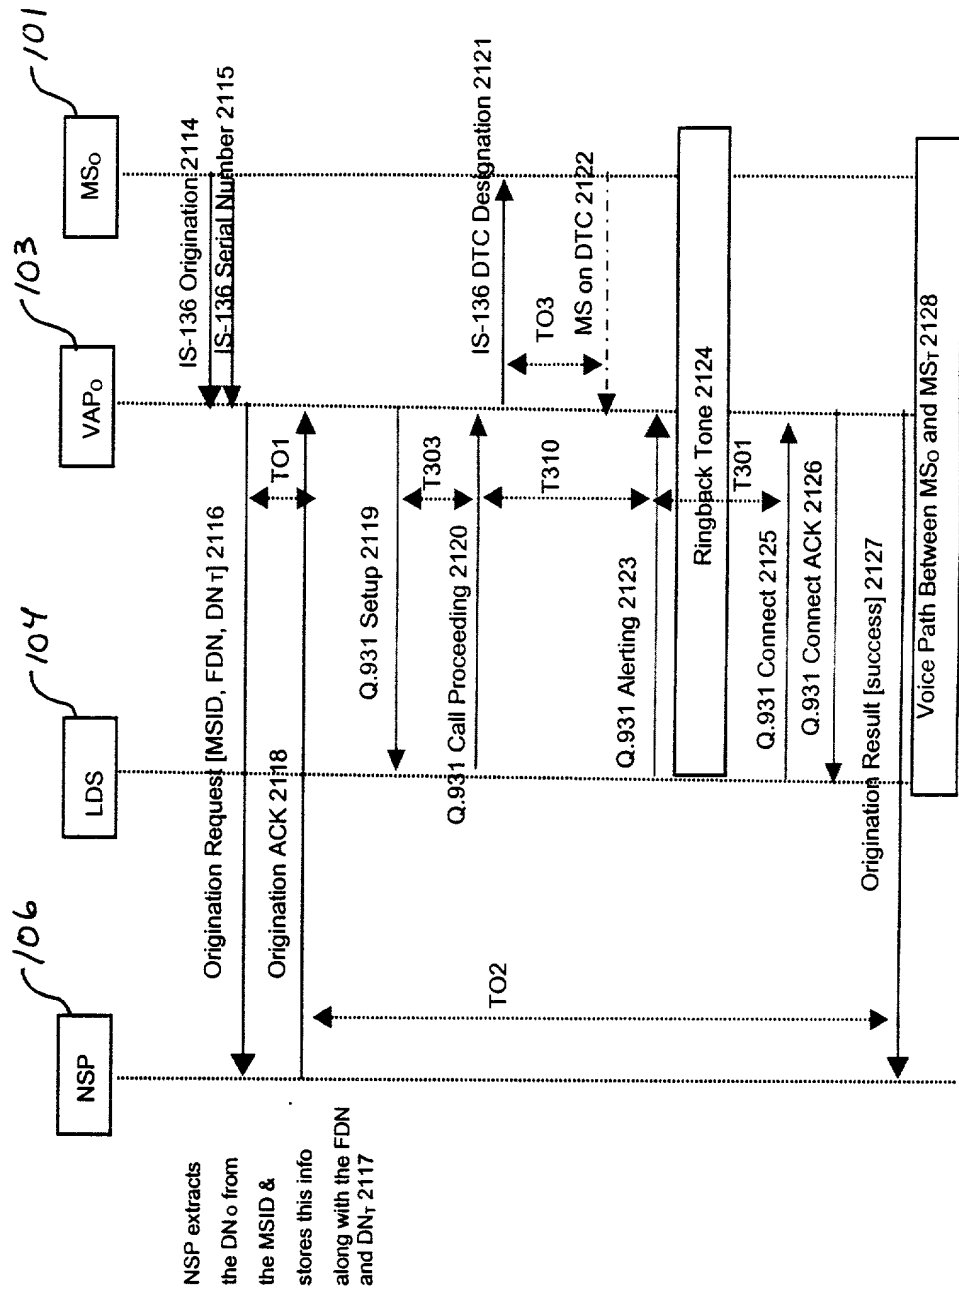


Fig. 21D

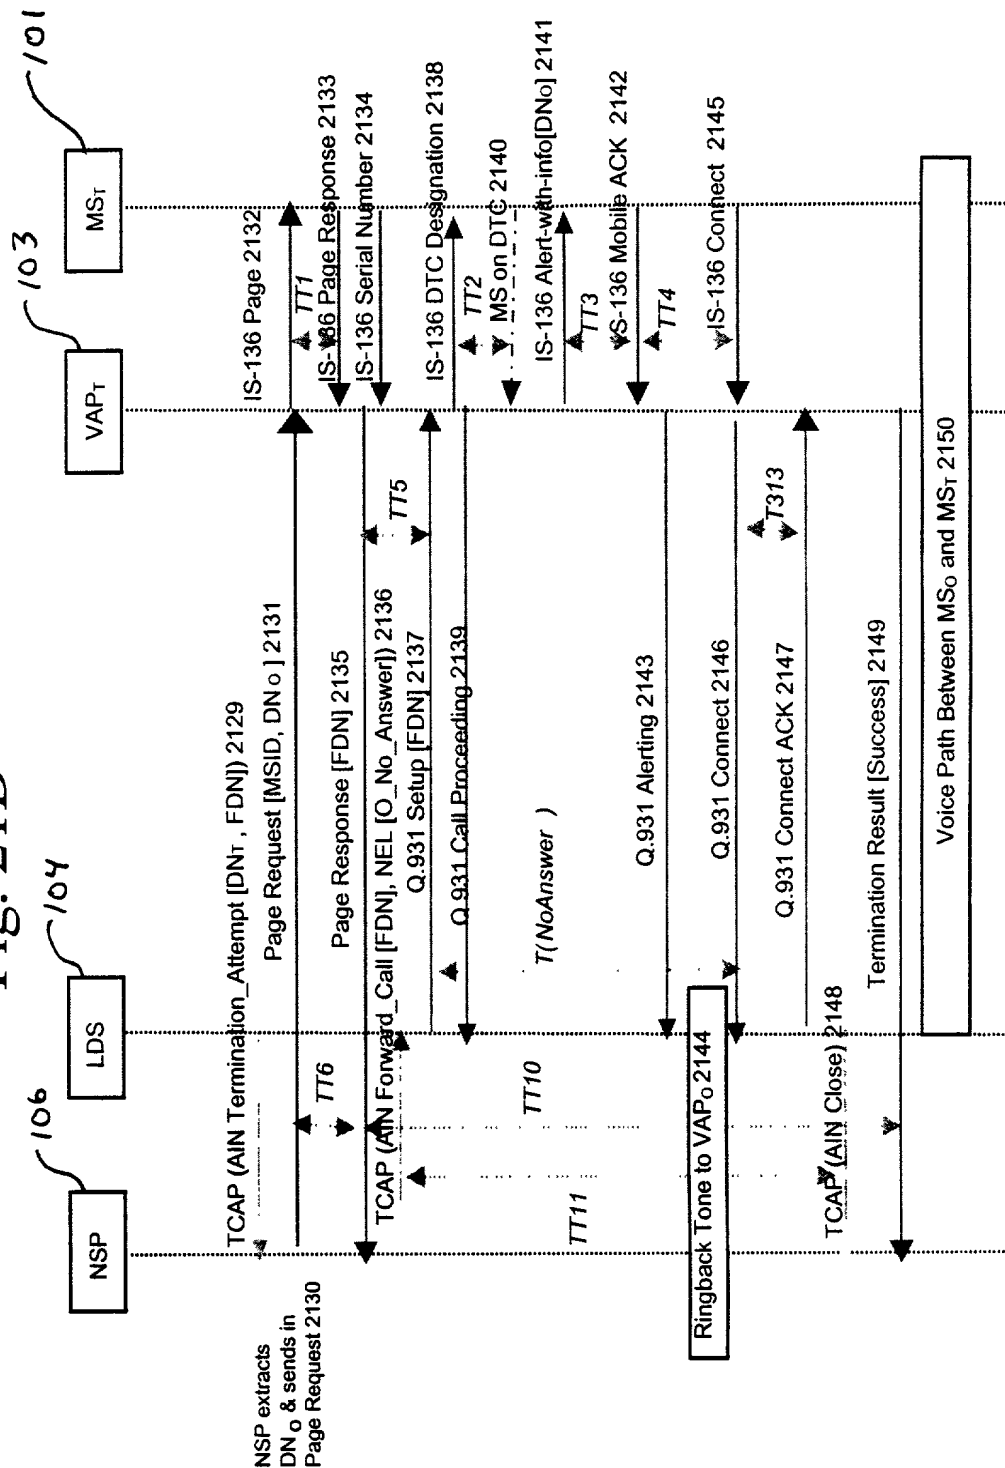
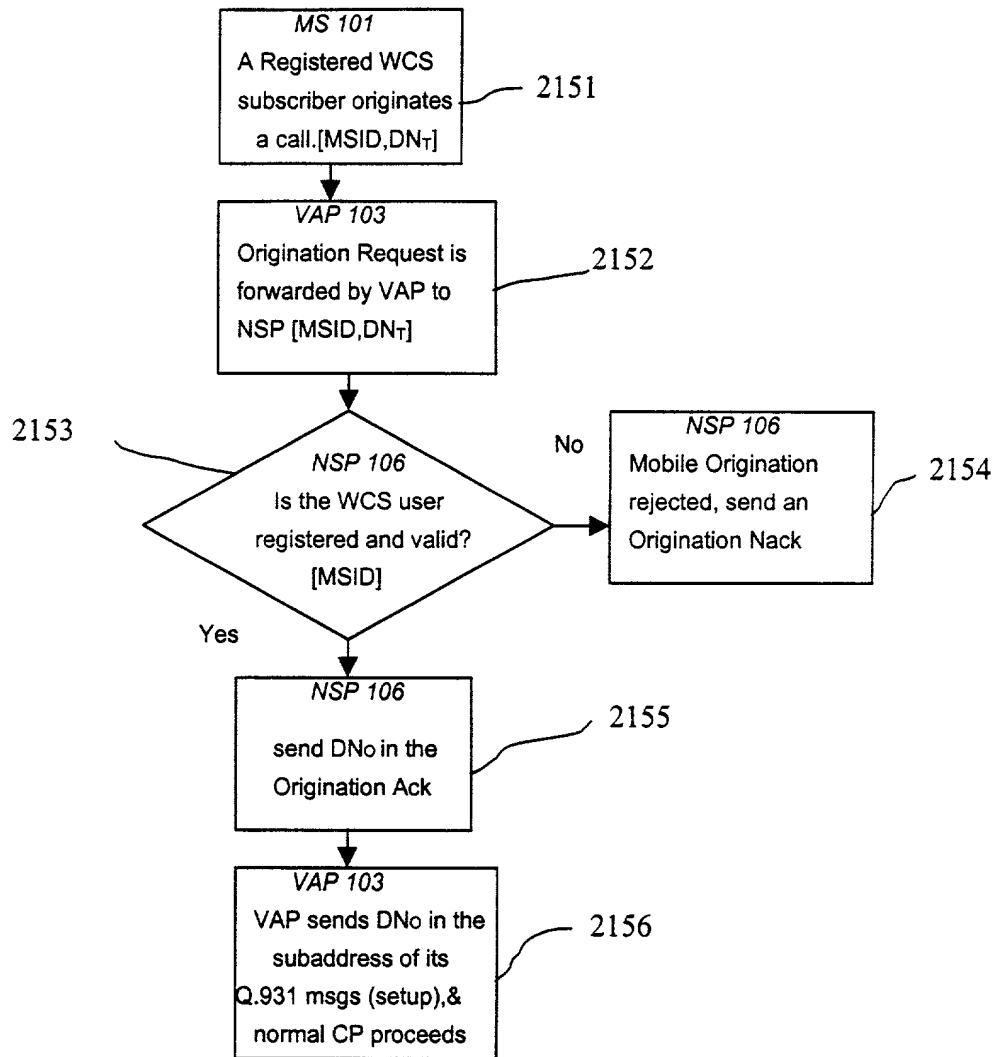


Fig. 21E





**Fig. 21F**

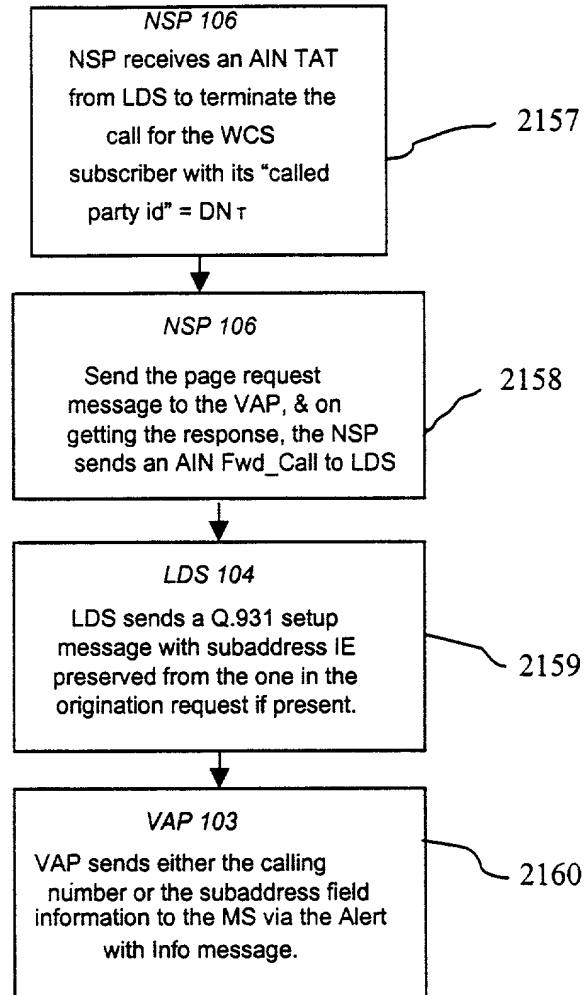


Fig. 21G

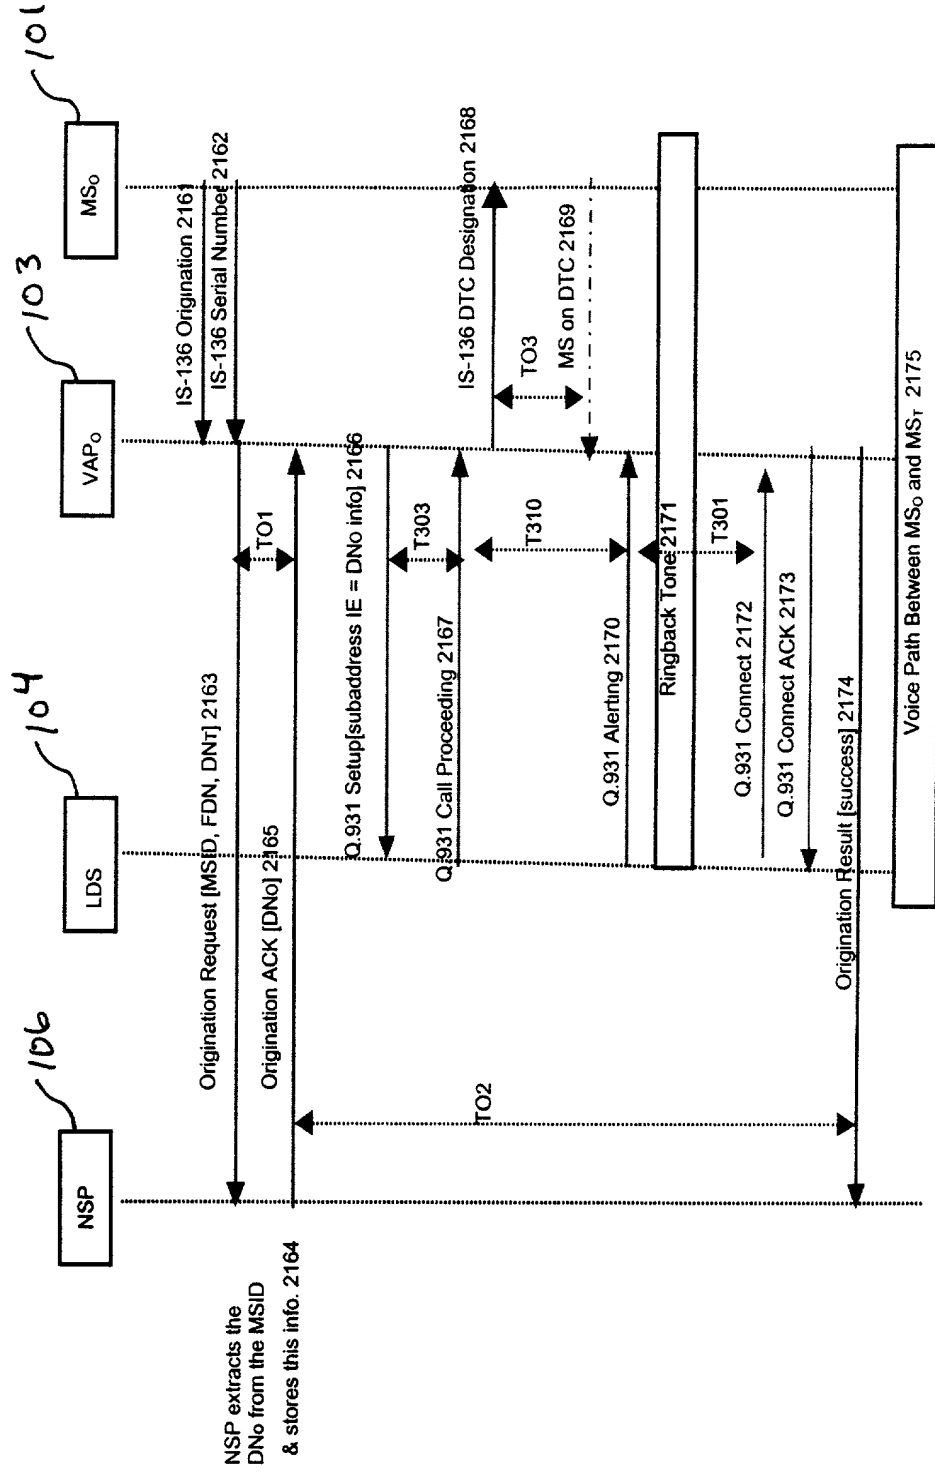


Fig. 21H

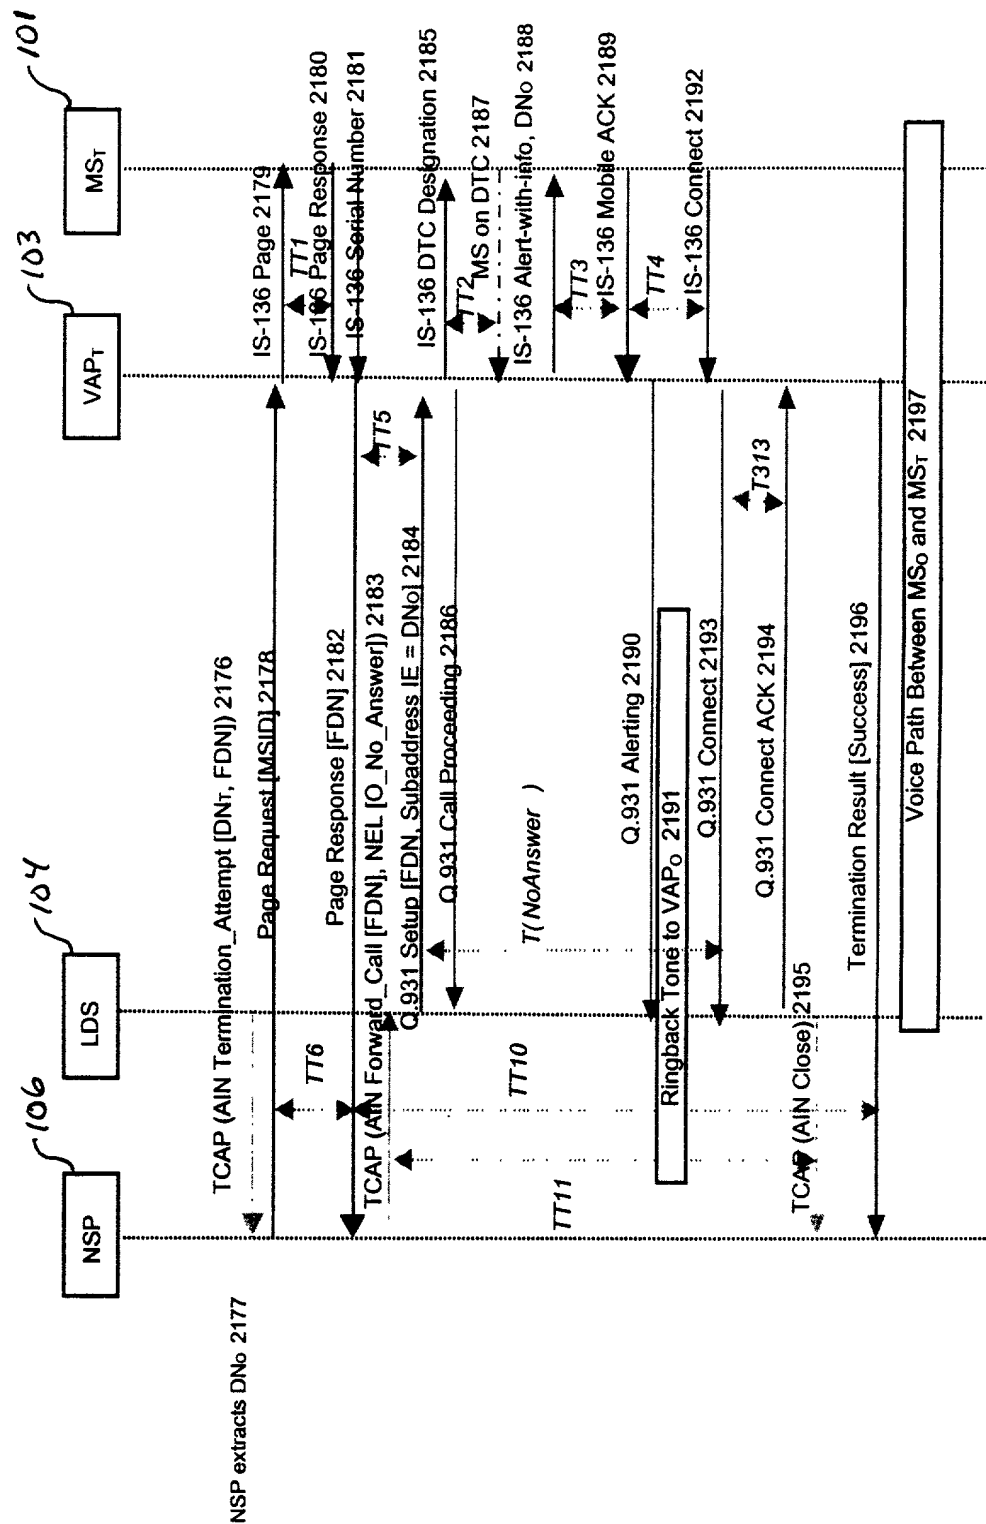


Fig. 22

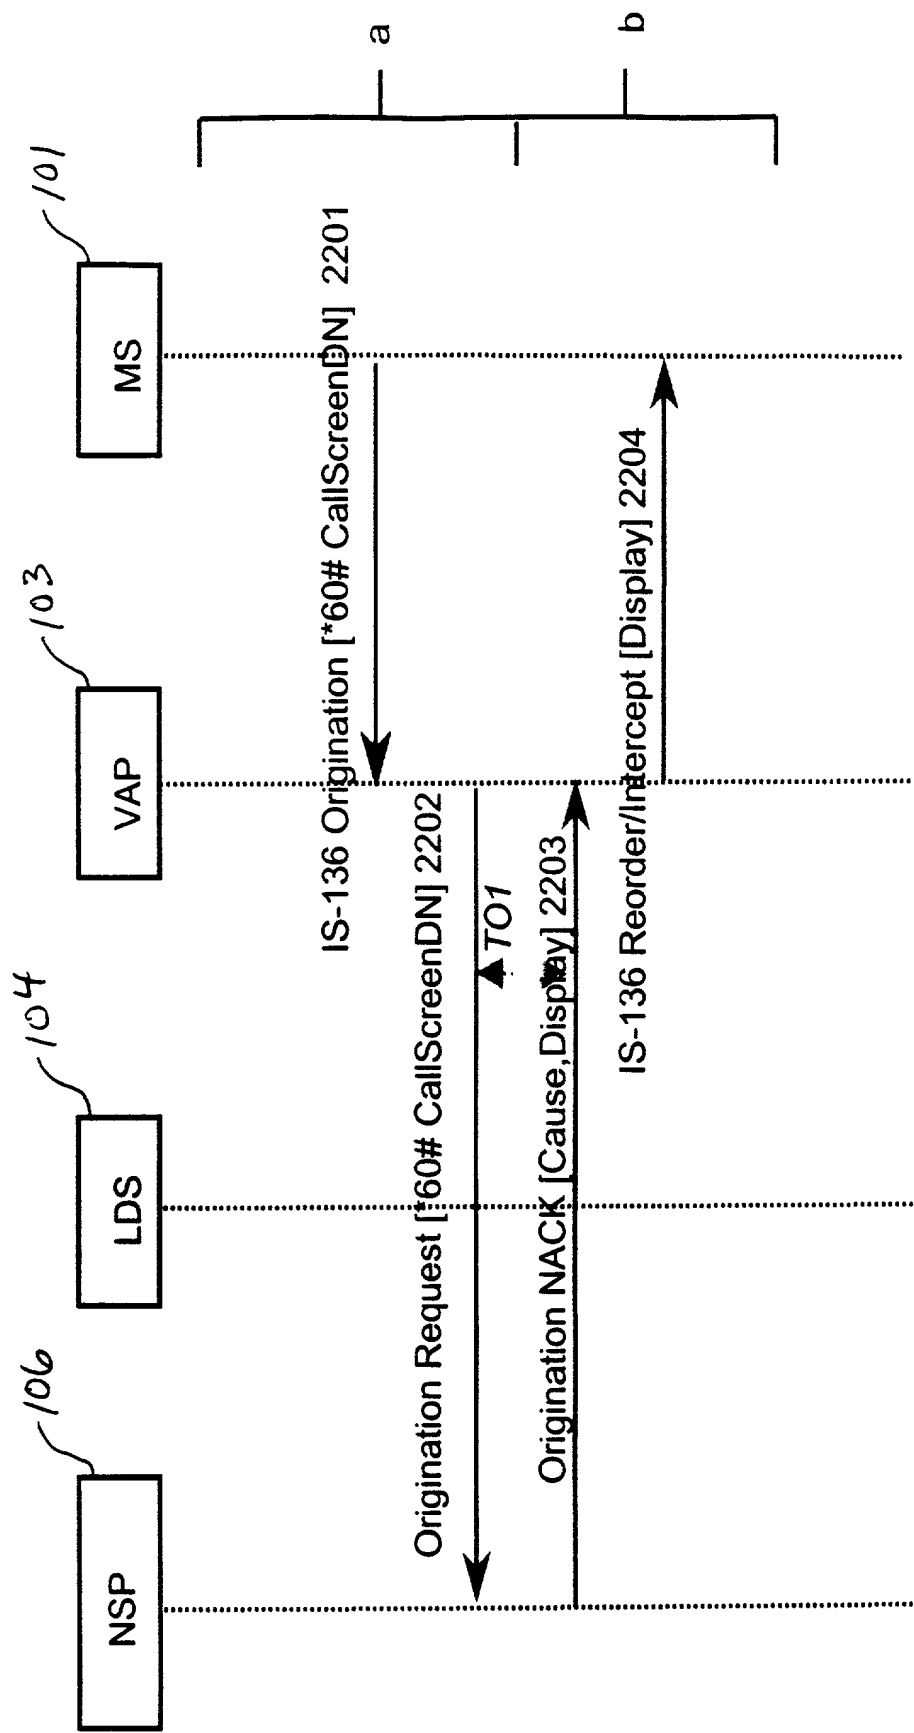
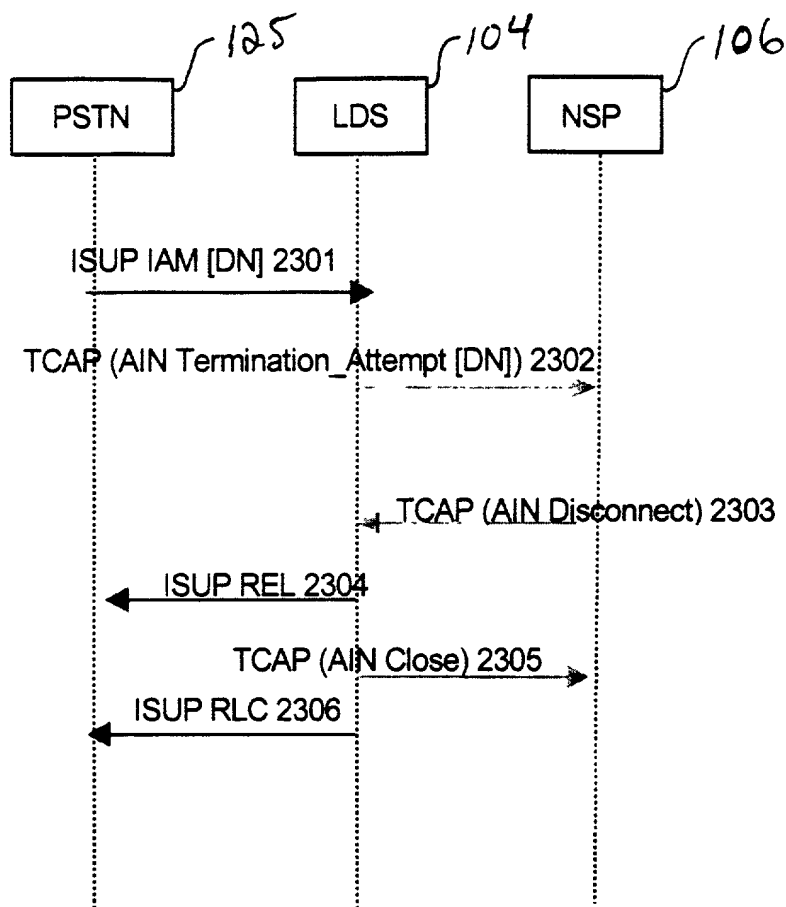
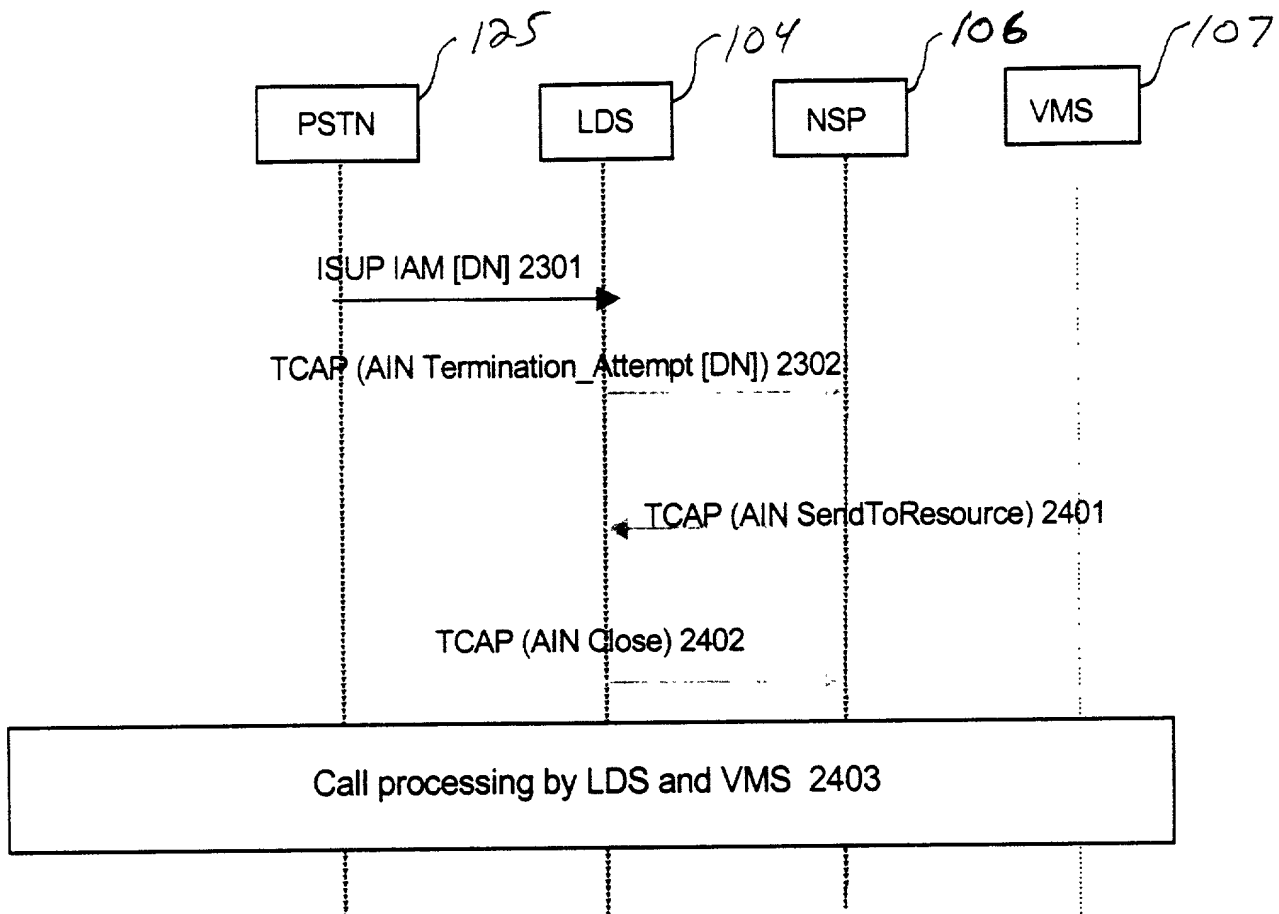


Fig. 23

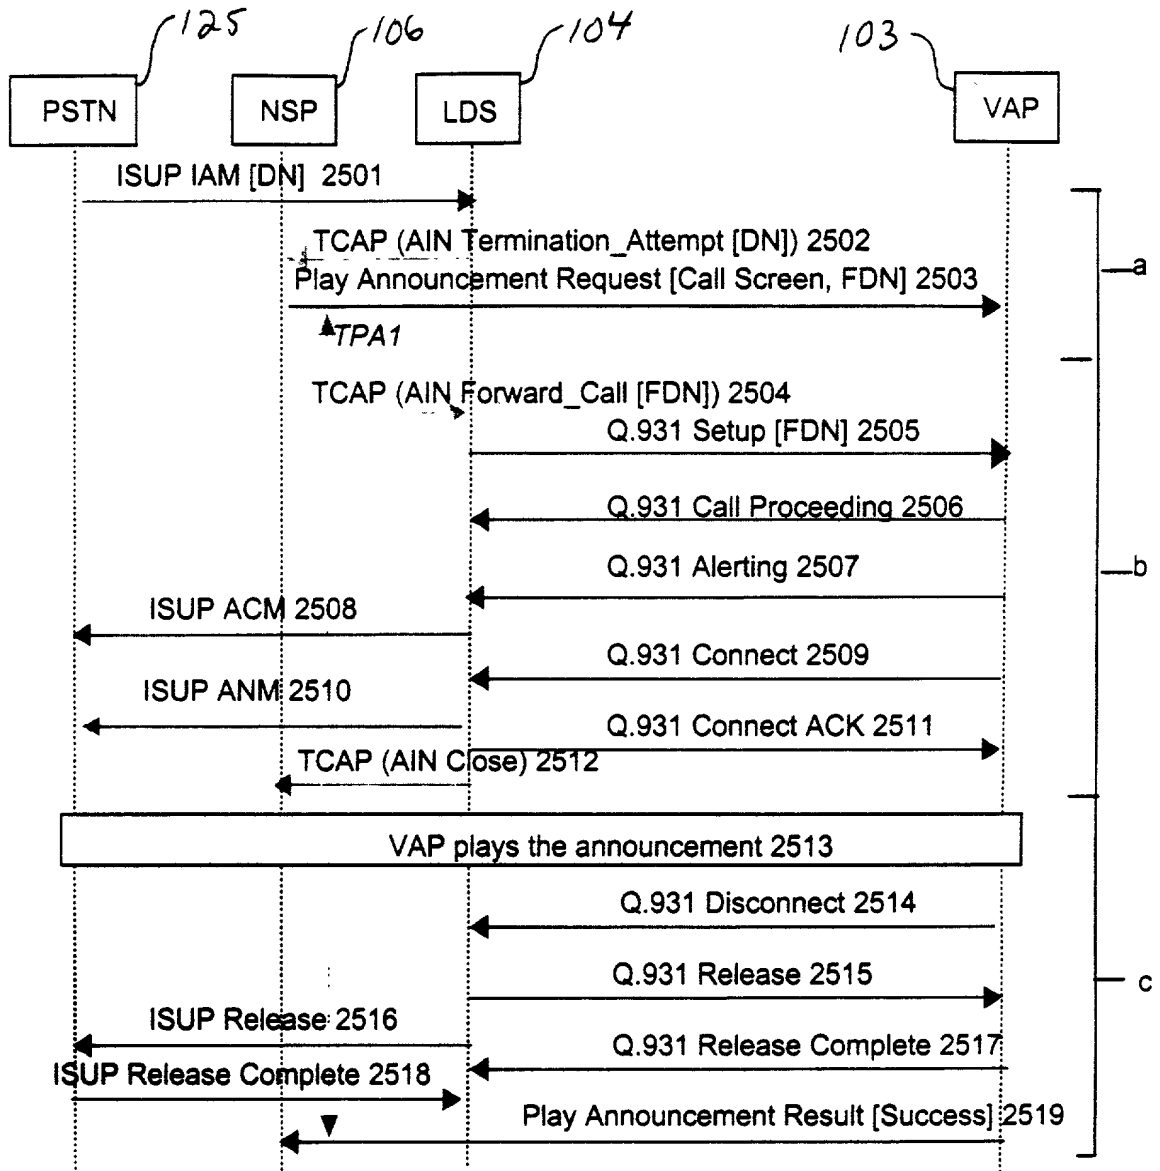


**Fig. 24**



Patent 04889460

# Fig. 25



# UNCONDITIONAL CALL FORWARDING

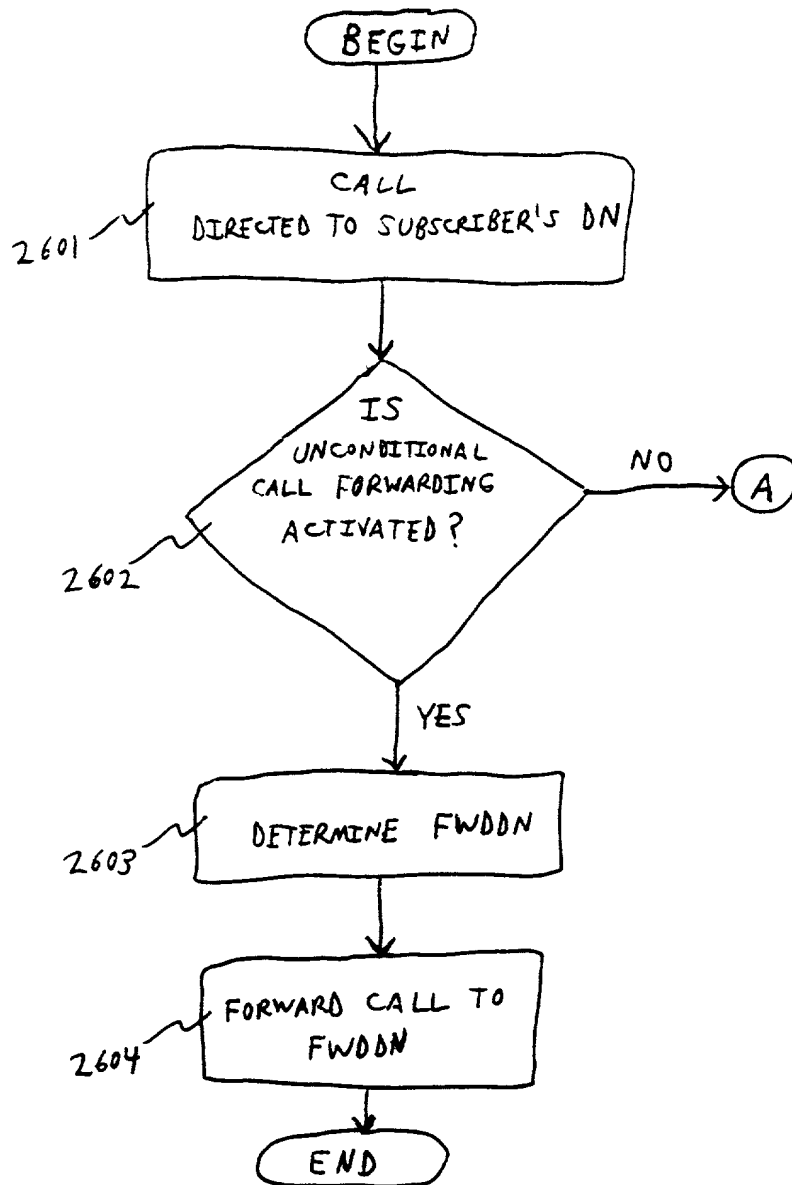


FIG. 26



# UNCONDITIONAL CALL FORWARDING

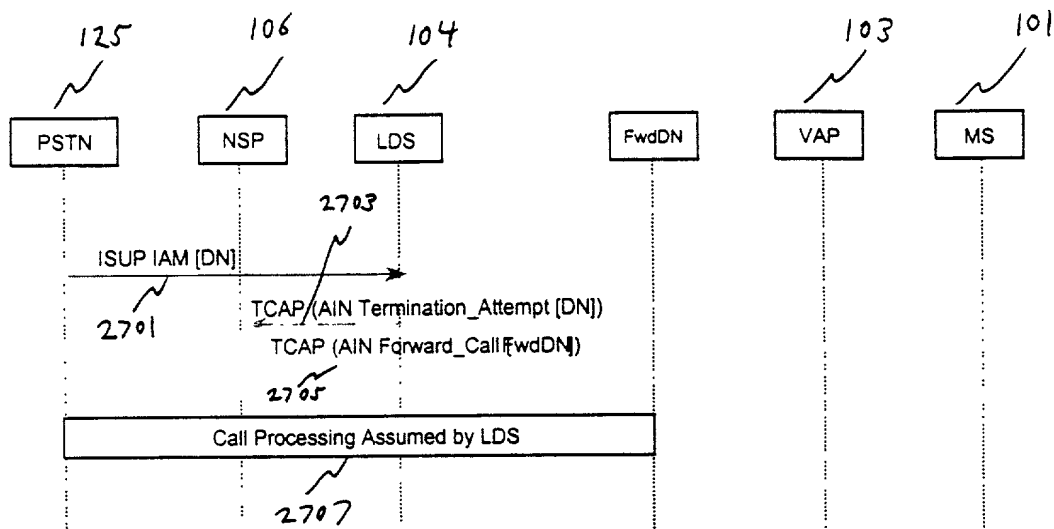


FIG. 27

# BUSY CALL FORWARDING

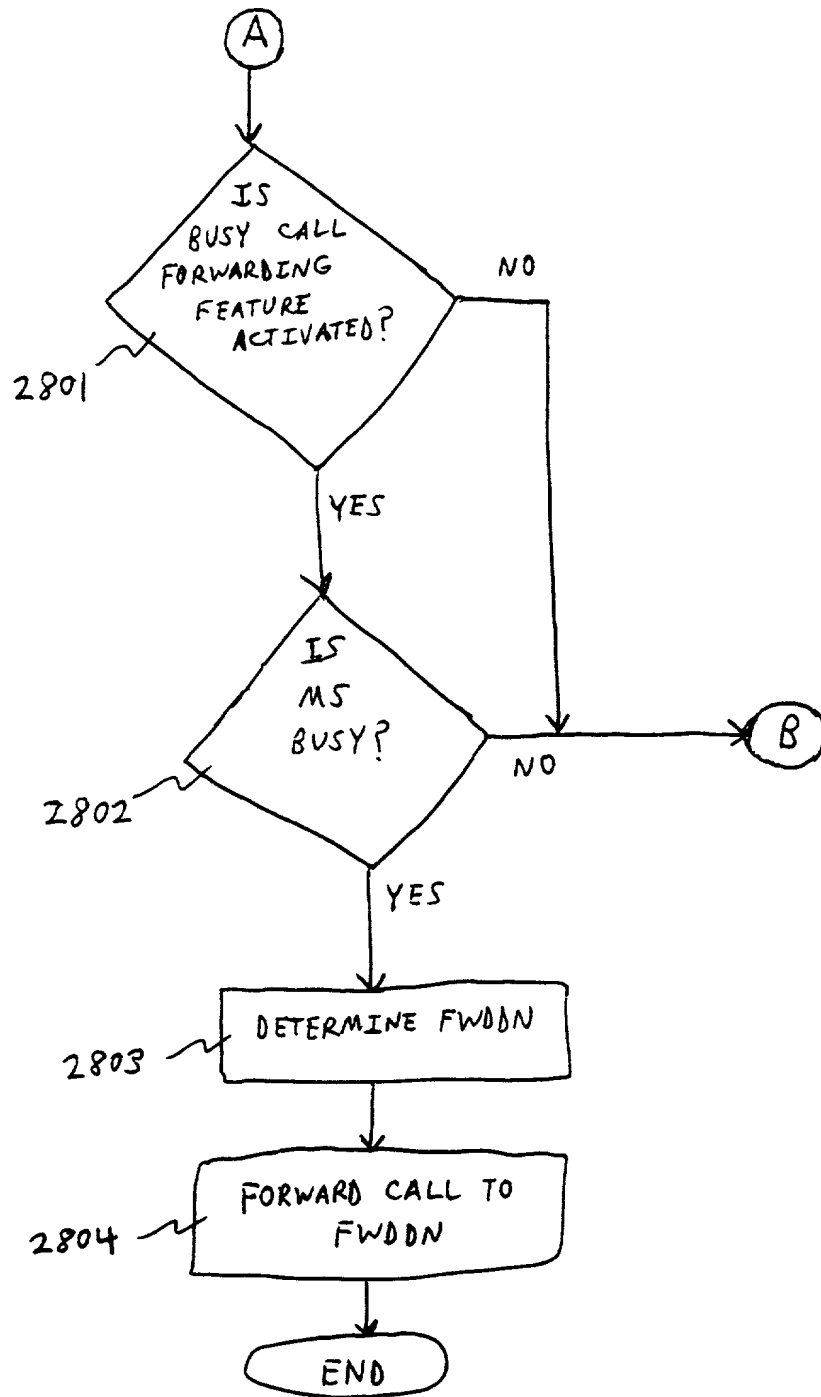


FIG. 28

# BUSY CALL FORWARDING

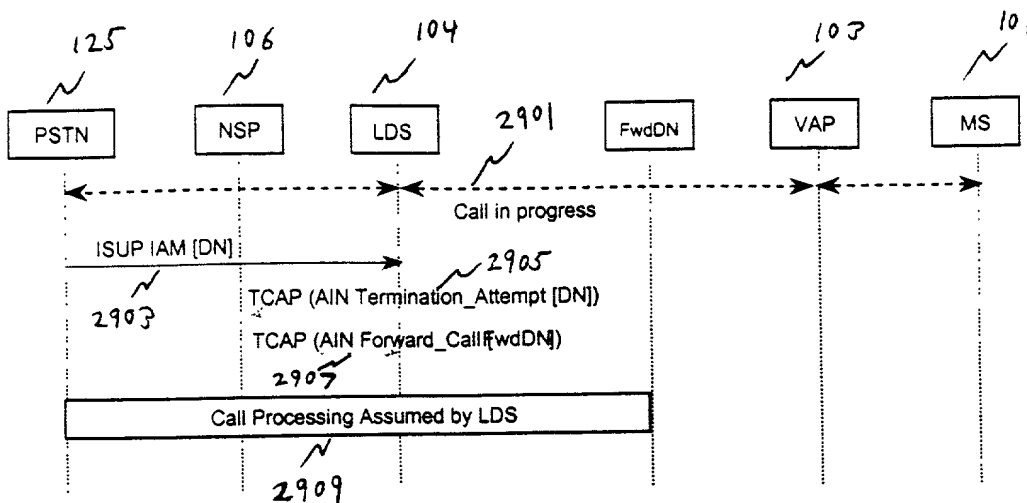


FIG. 29

TIME-OF-DAY CALL FORWARDING

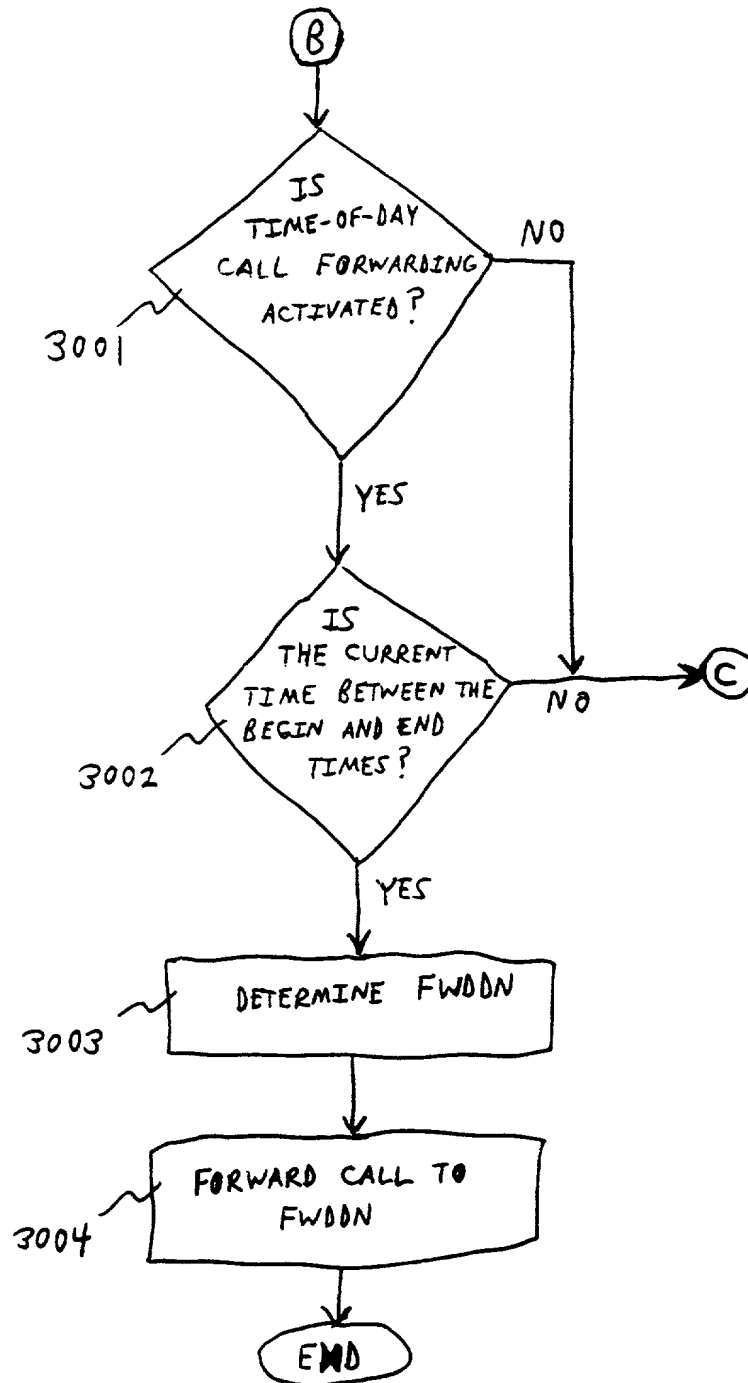


FIG. 30

# TIME-OF-DAY CALL FORWARDING

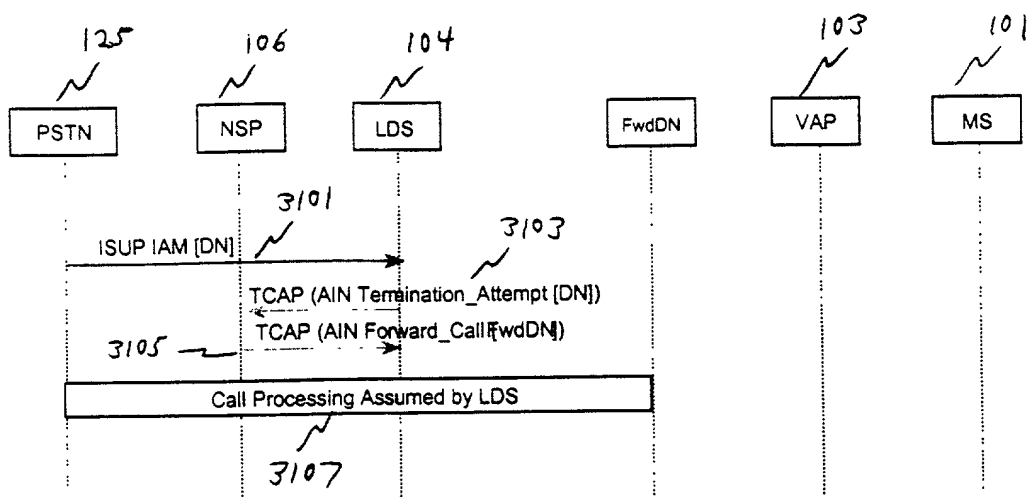


FIG. 31

# PROGRAMMABLE RING CALL FORWARDING

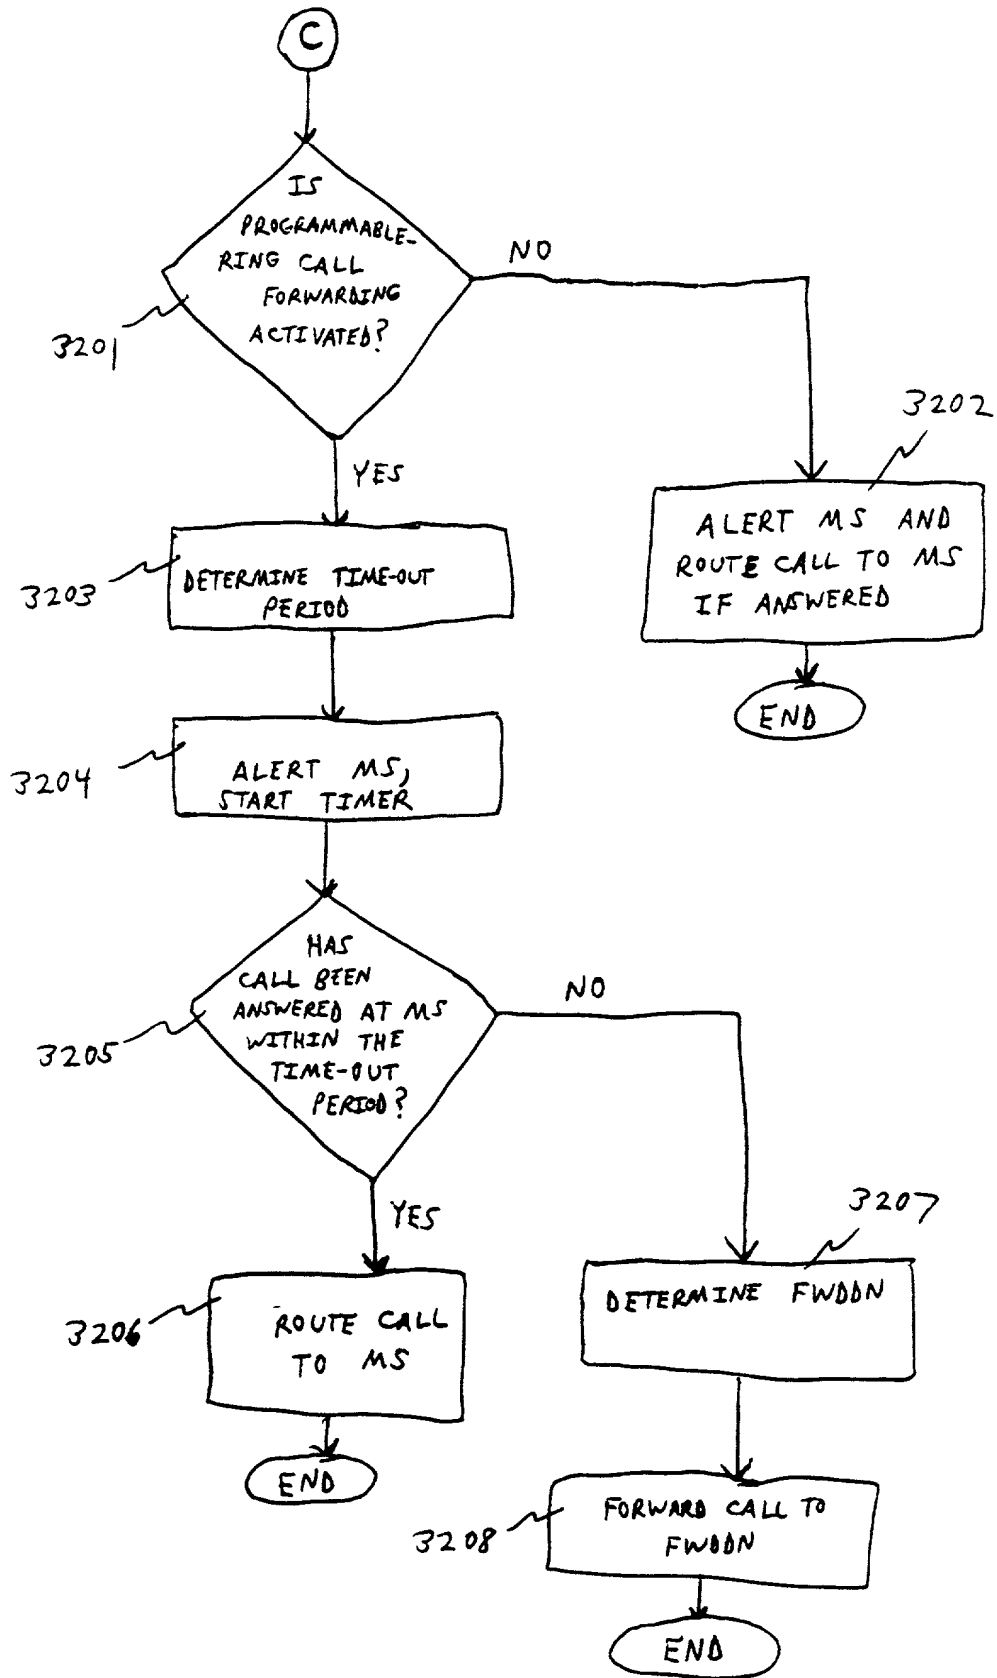


FIG. 32

09458840 121399

# PROGRAMMABLE RING CALL FORWARDING

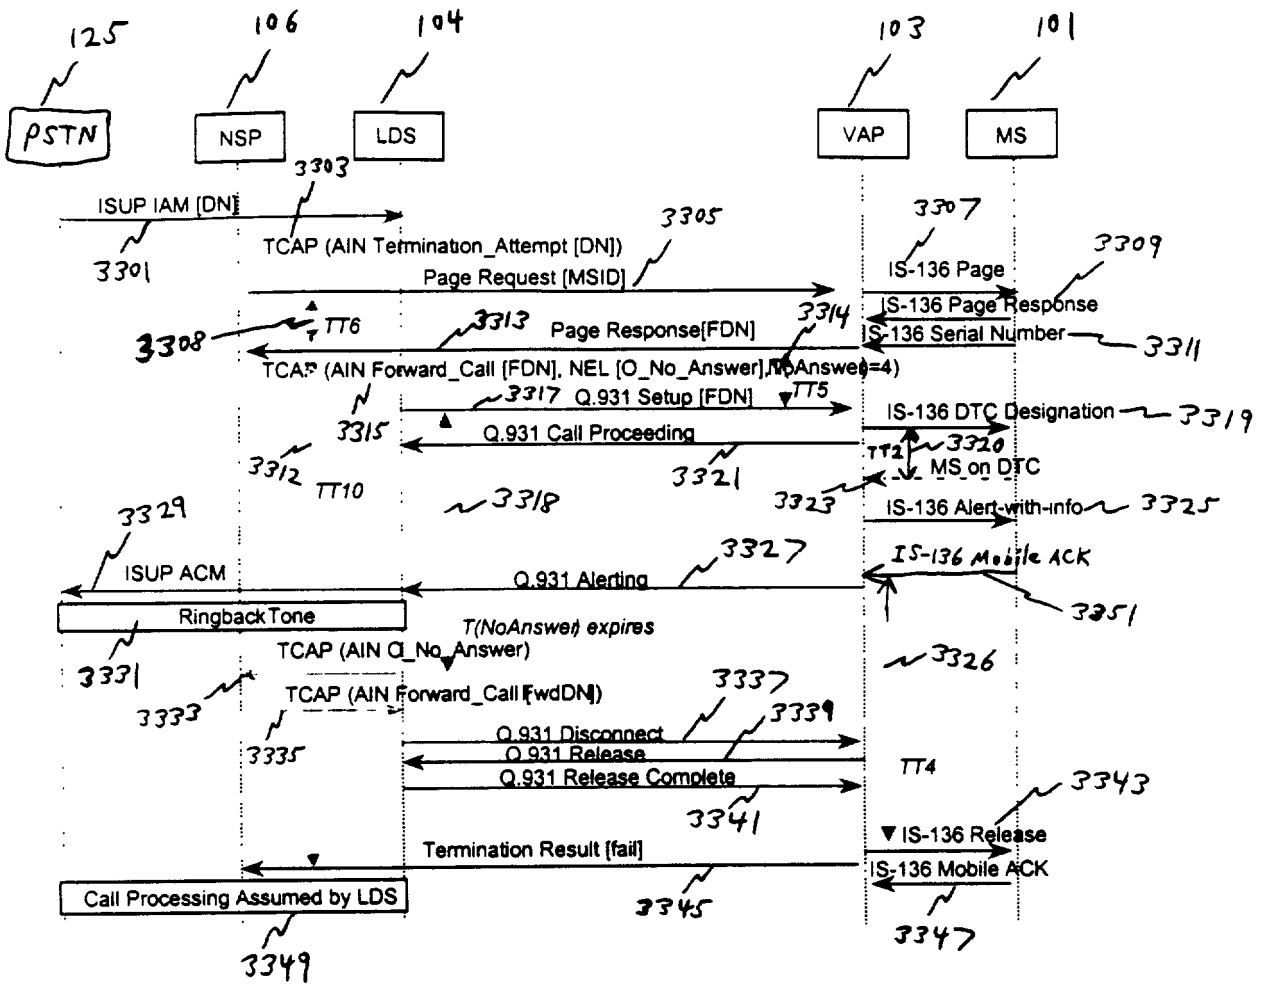


FIG. 33

3400

AT&T

Mobile Station 123-123-4567

Numbers to be forwarded to:

	unconditional	# of rings	when busy	time period
123-456-7890	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	weekends
234-567-8901	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Mondays, 8:00am-6:00pm
345-678-9012	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	October 26, 1999
3401	✓	3403	✓	3405
	3402		3404	

Fig. 34



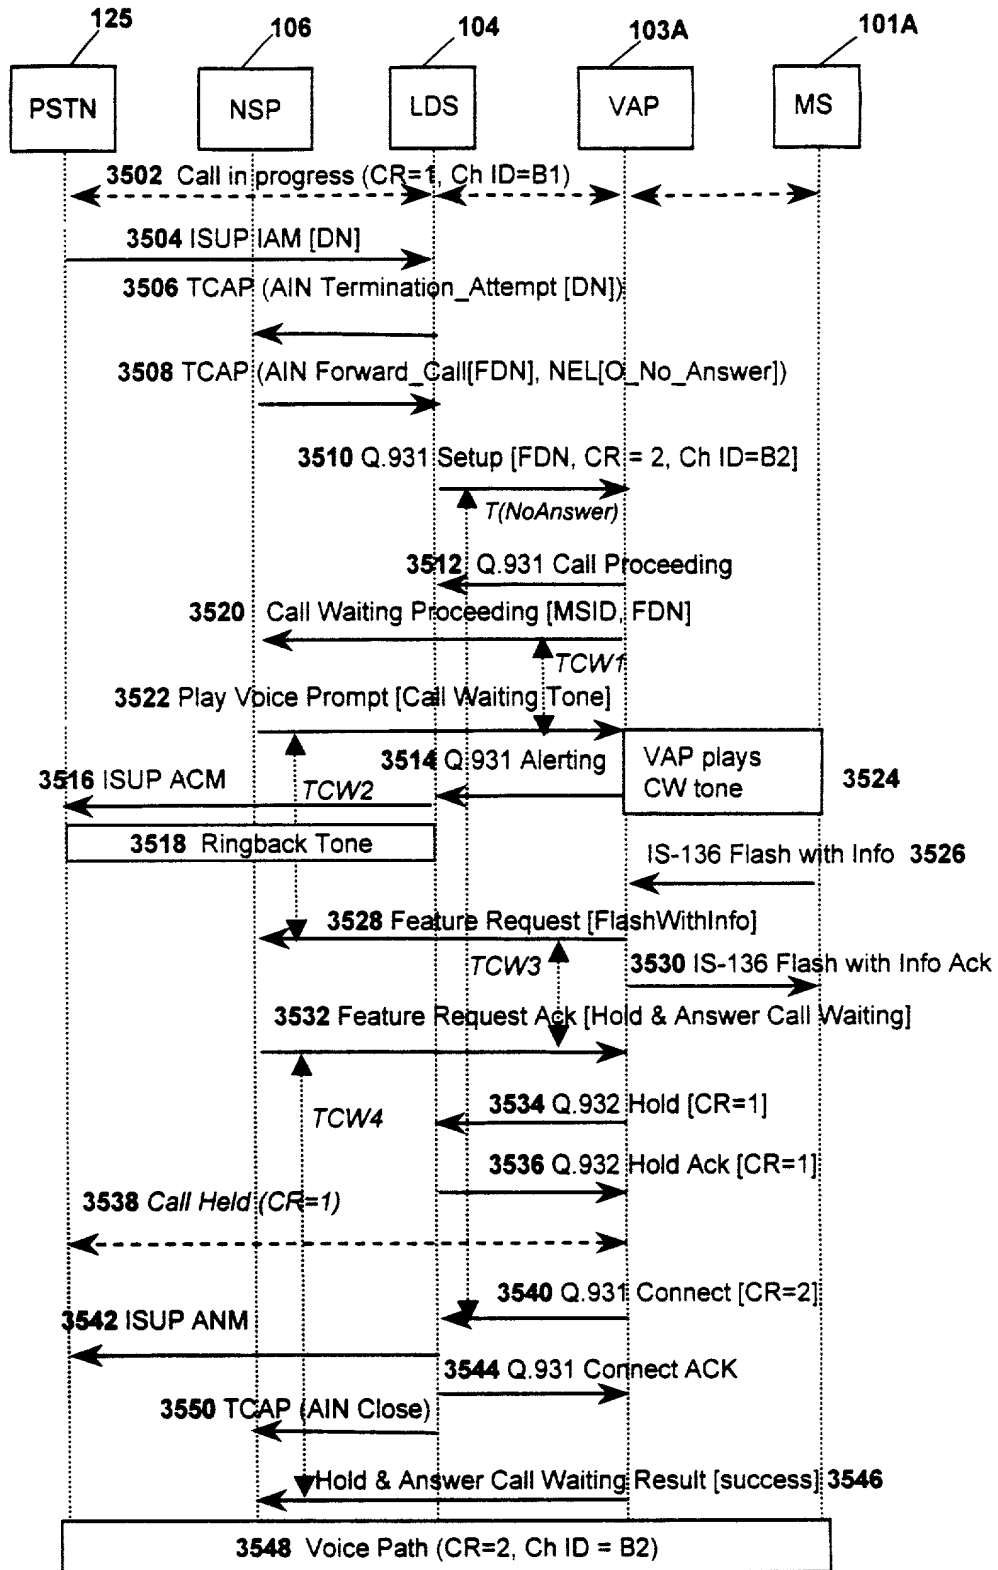


FIG. 35

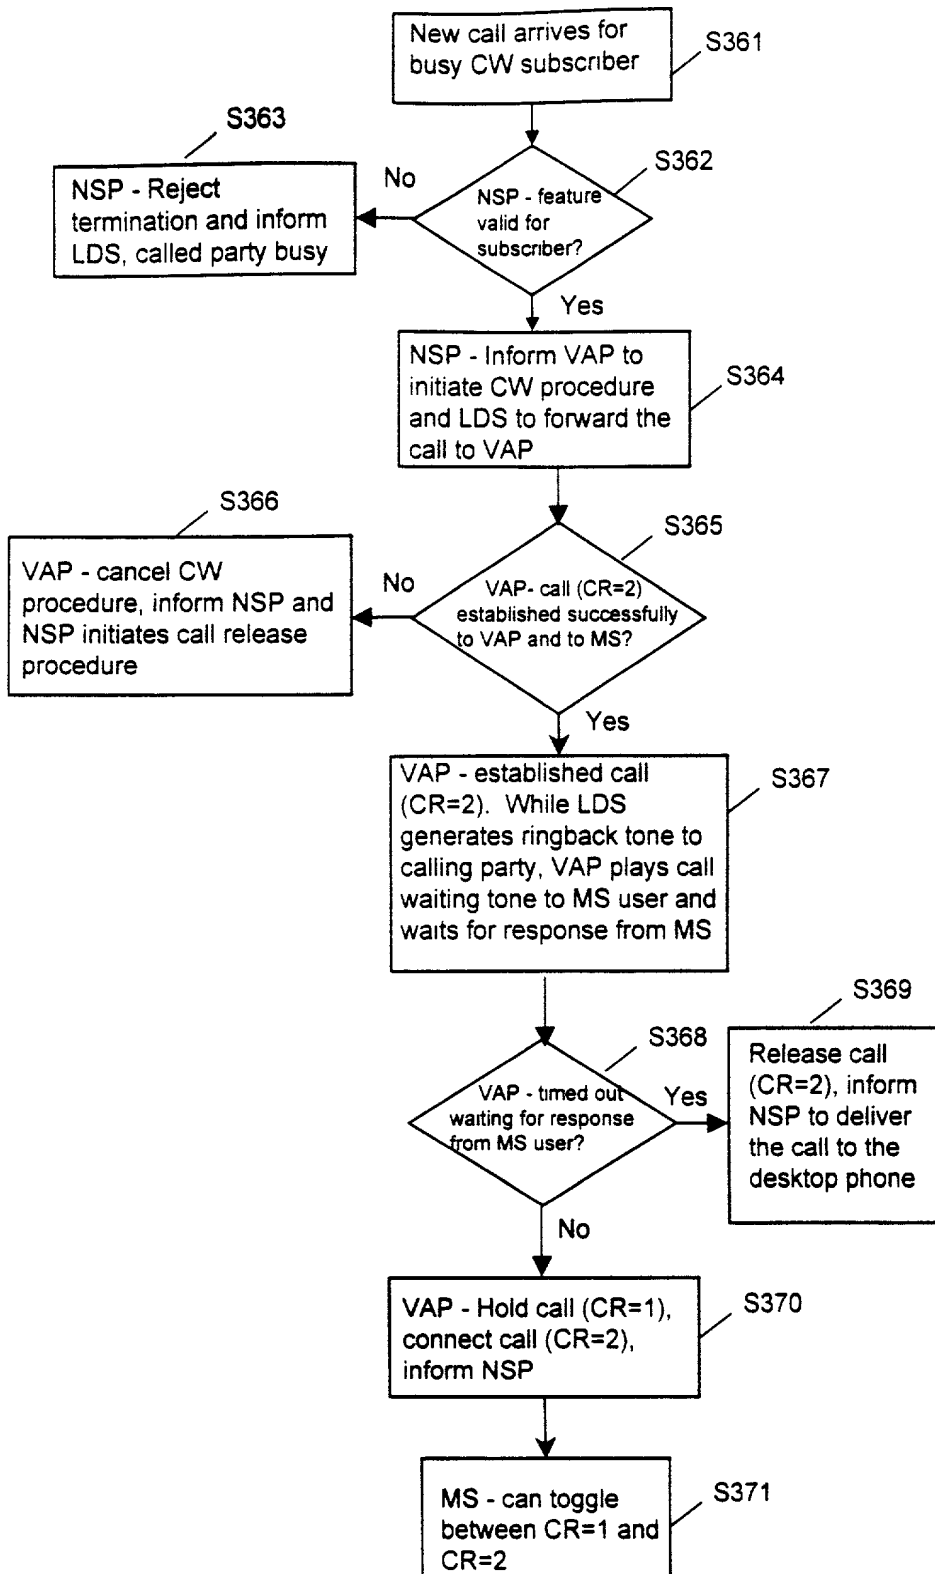


FIG. 36

FIG. 37

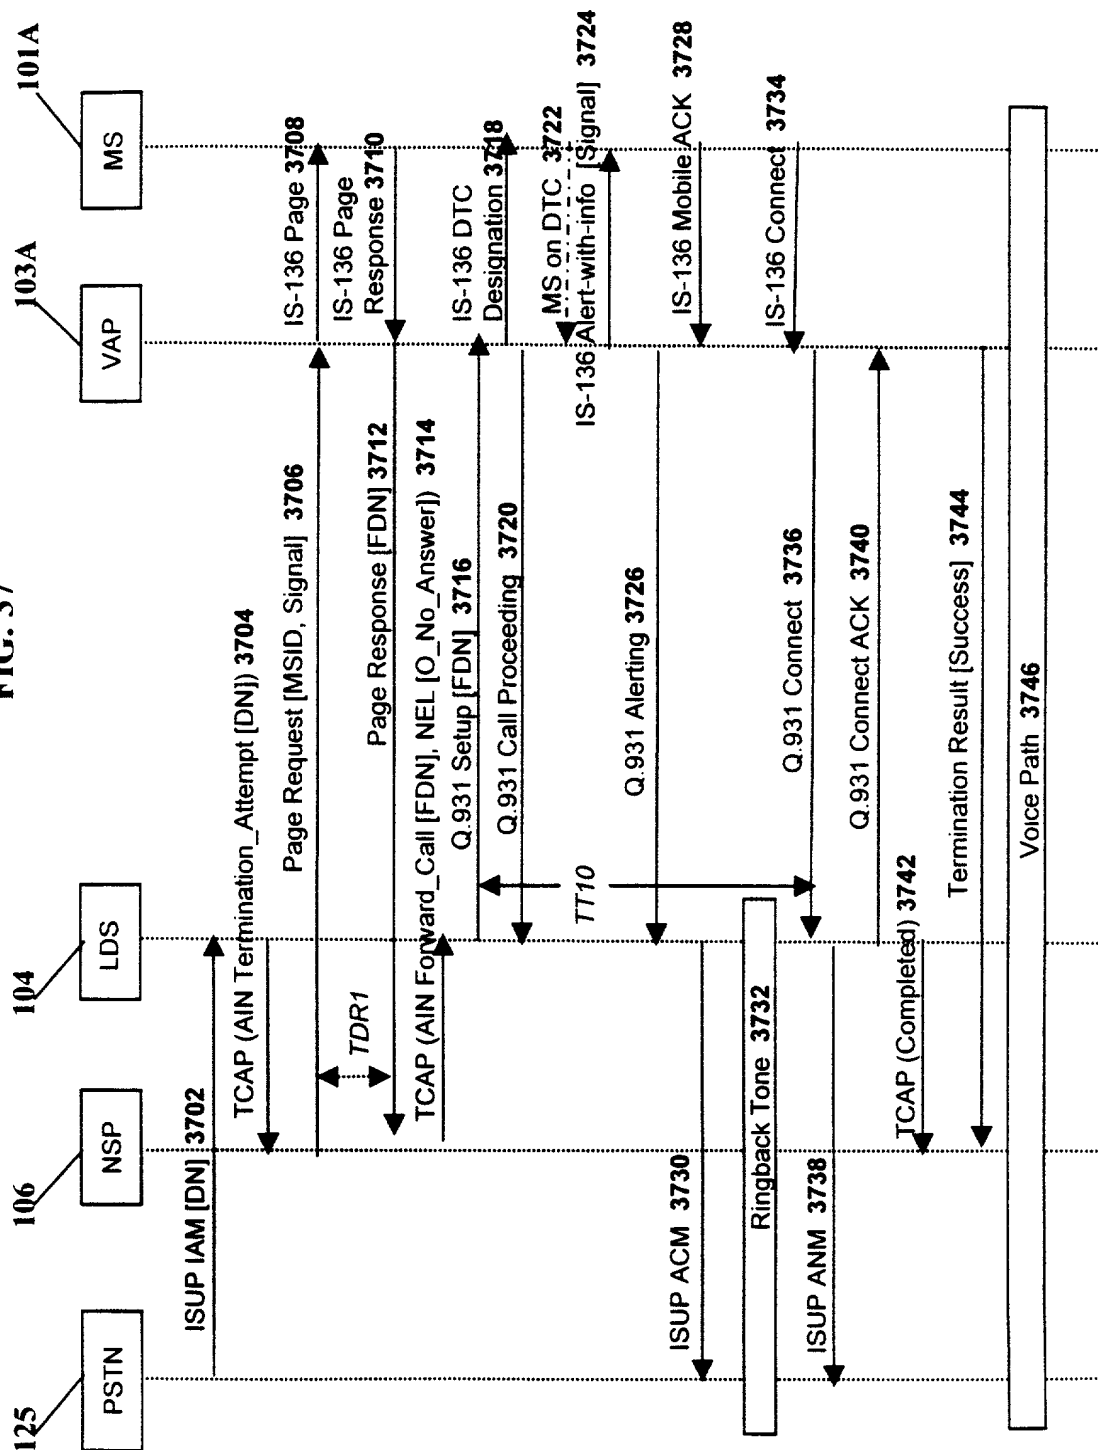
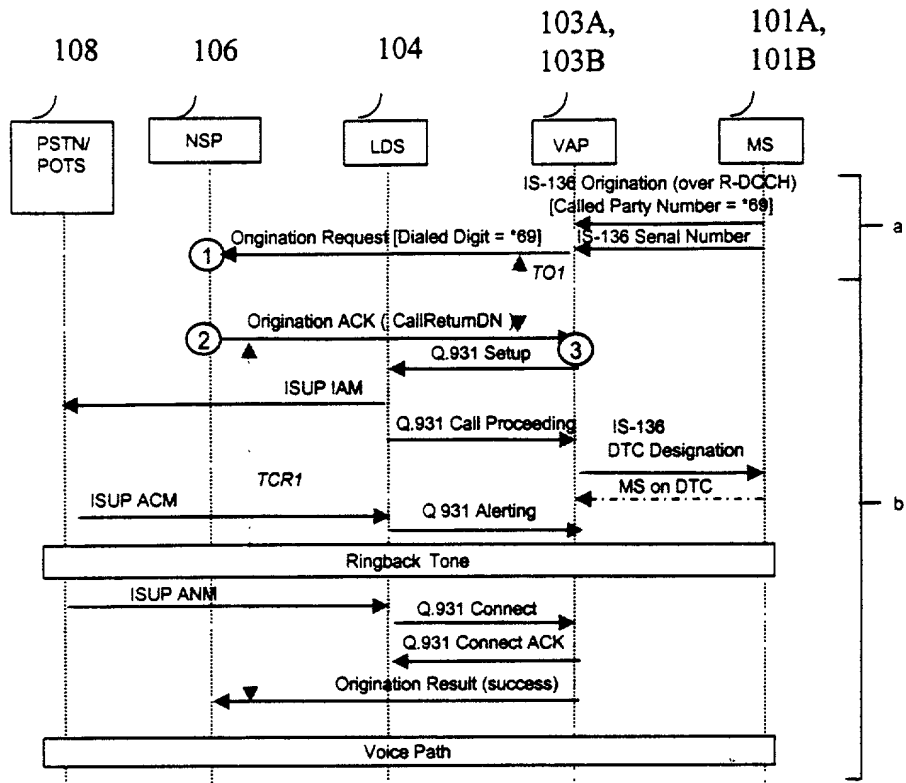


FIGURE 38



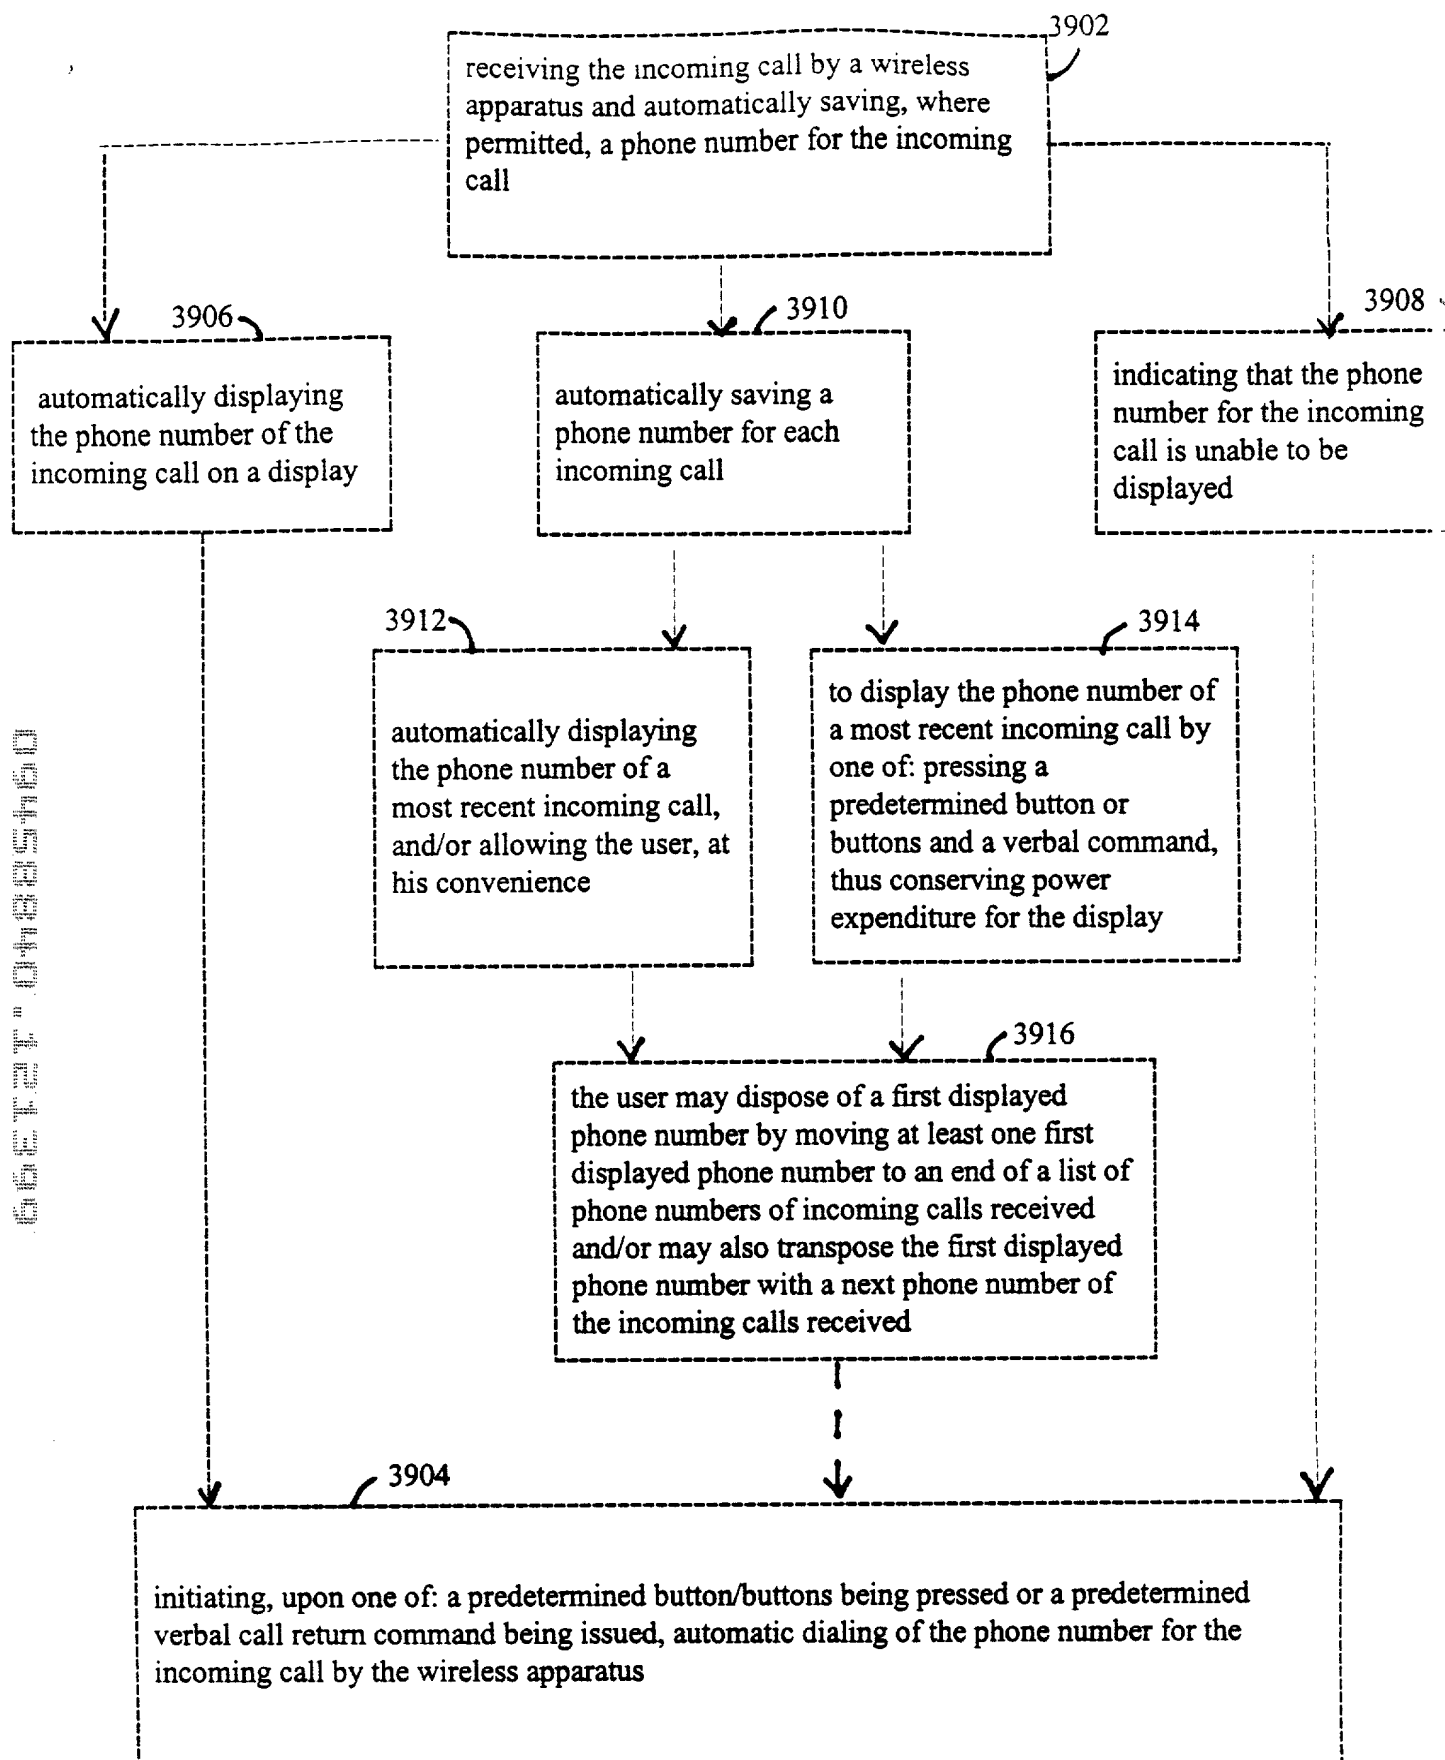


Figure 39

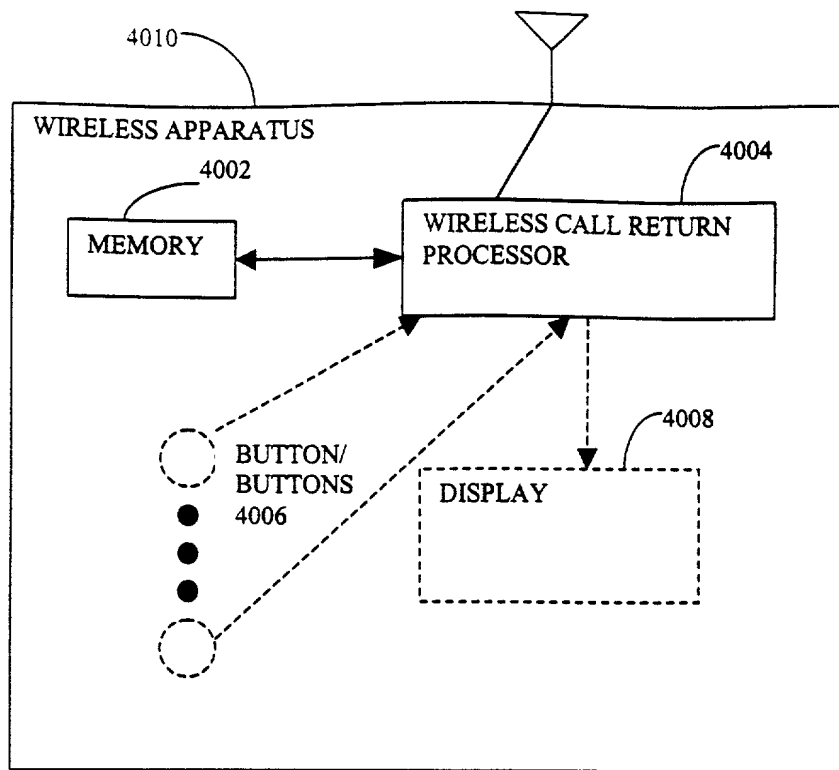


Figure 40

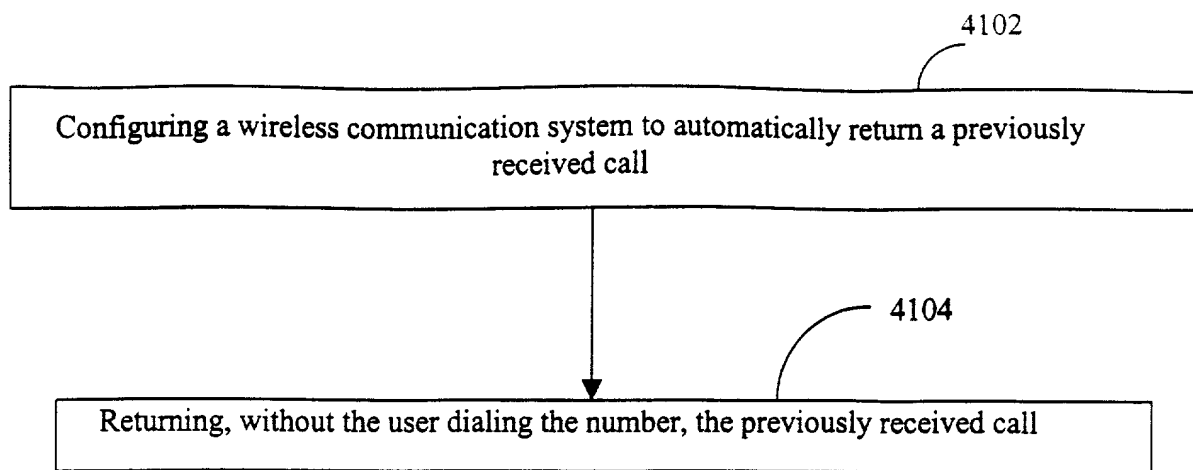


Figure 41

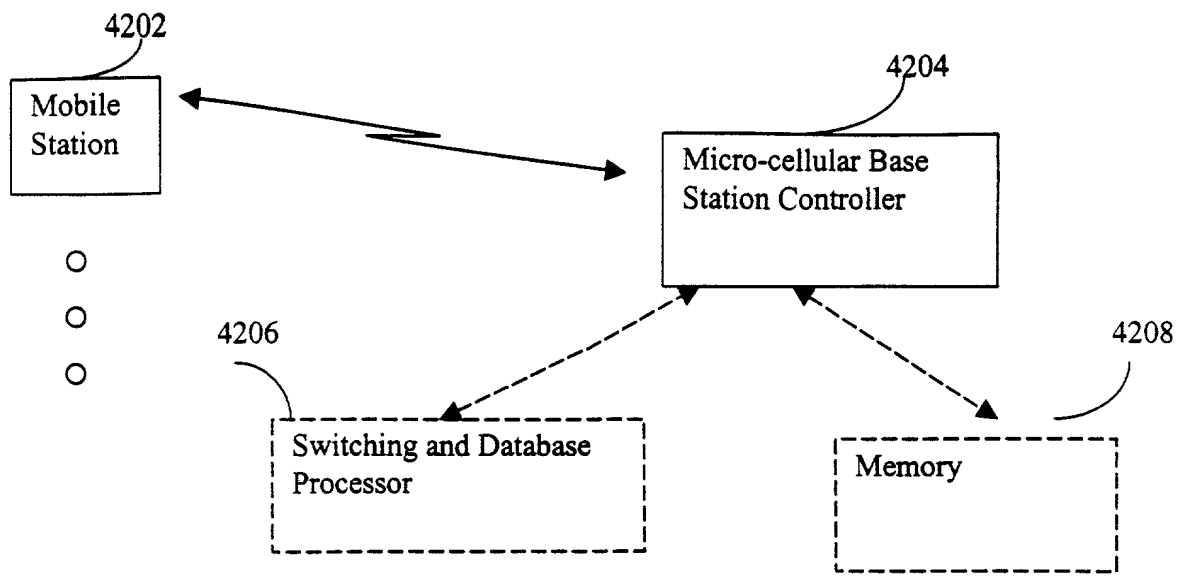


Figure 42



# Automatic Callback - Signaling Flow

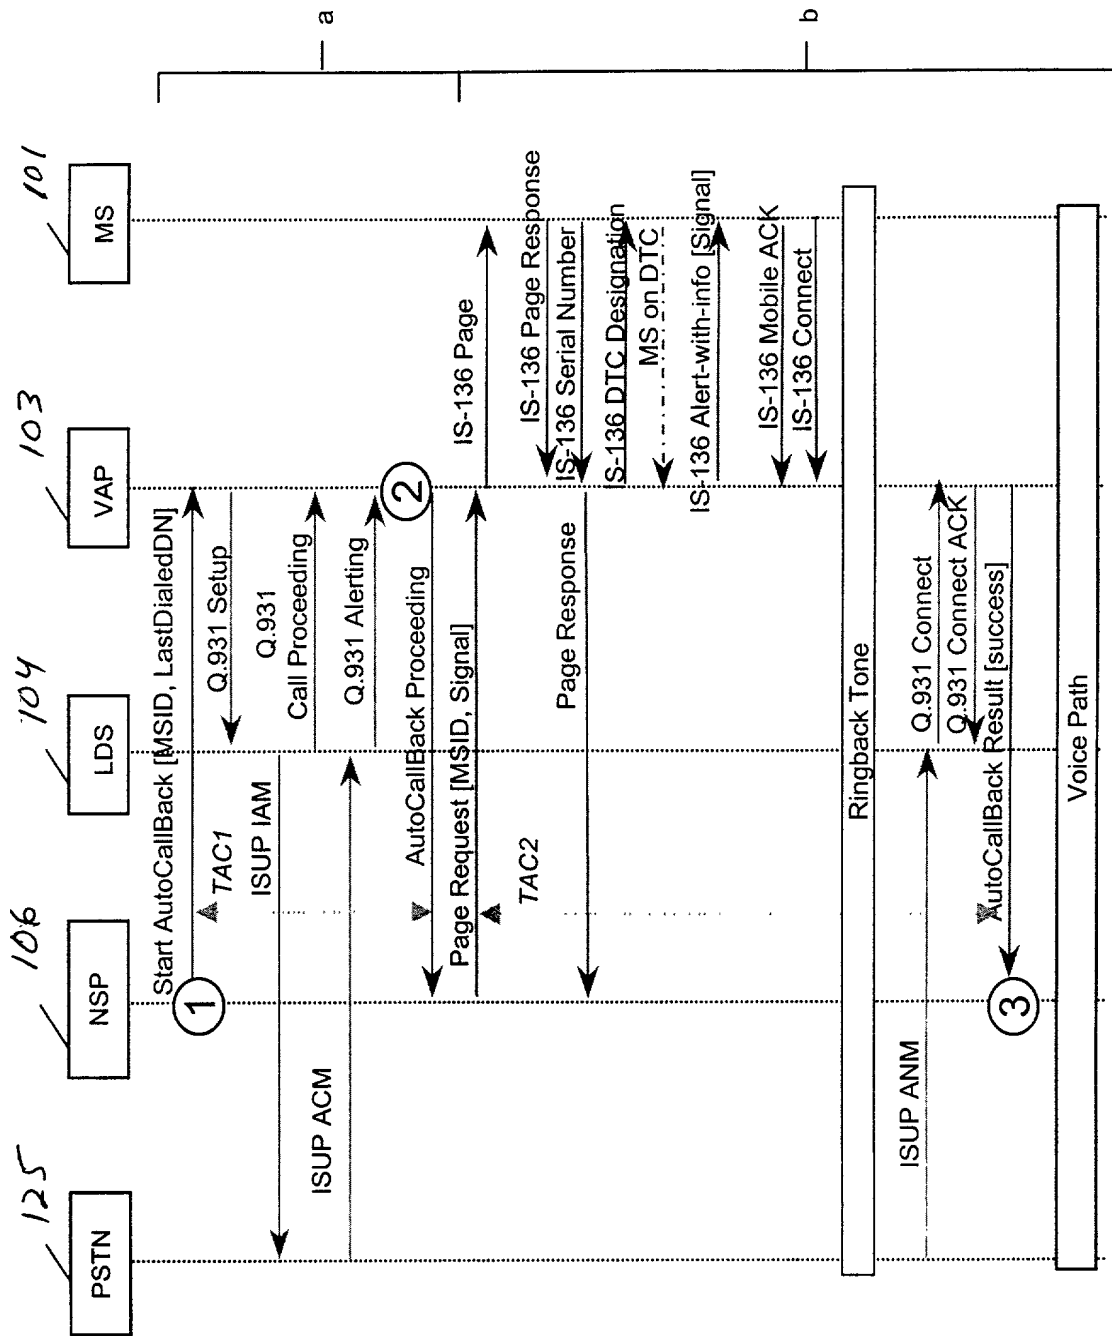


Figure 43

# Automatic Callback - MS Handoff to VAPn - Signaling Flow

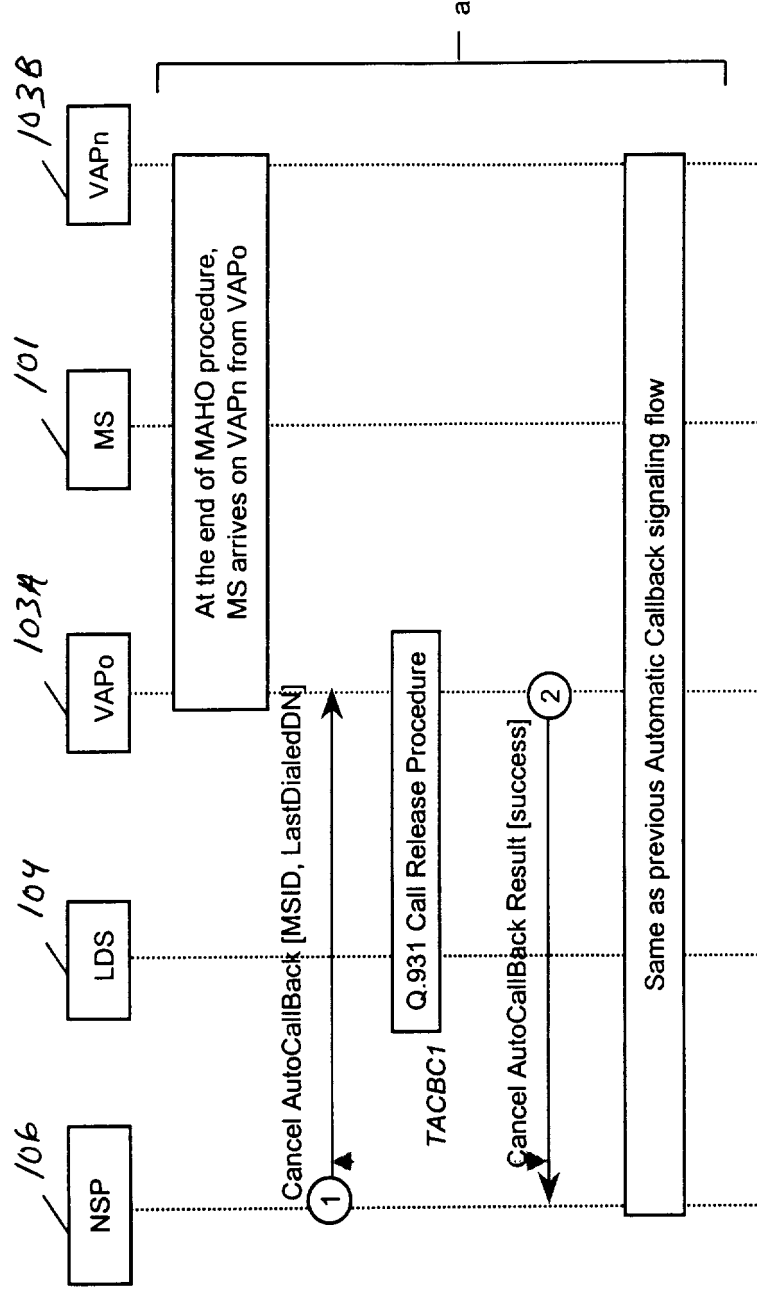


Figure 44

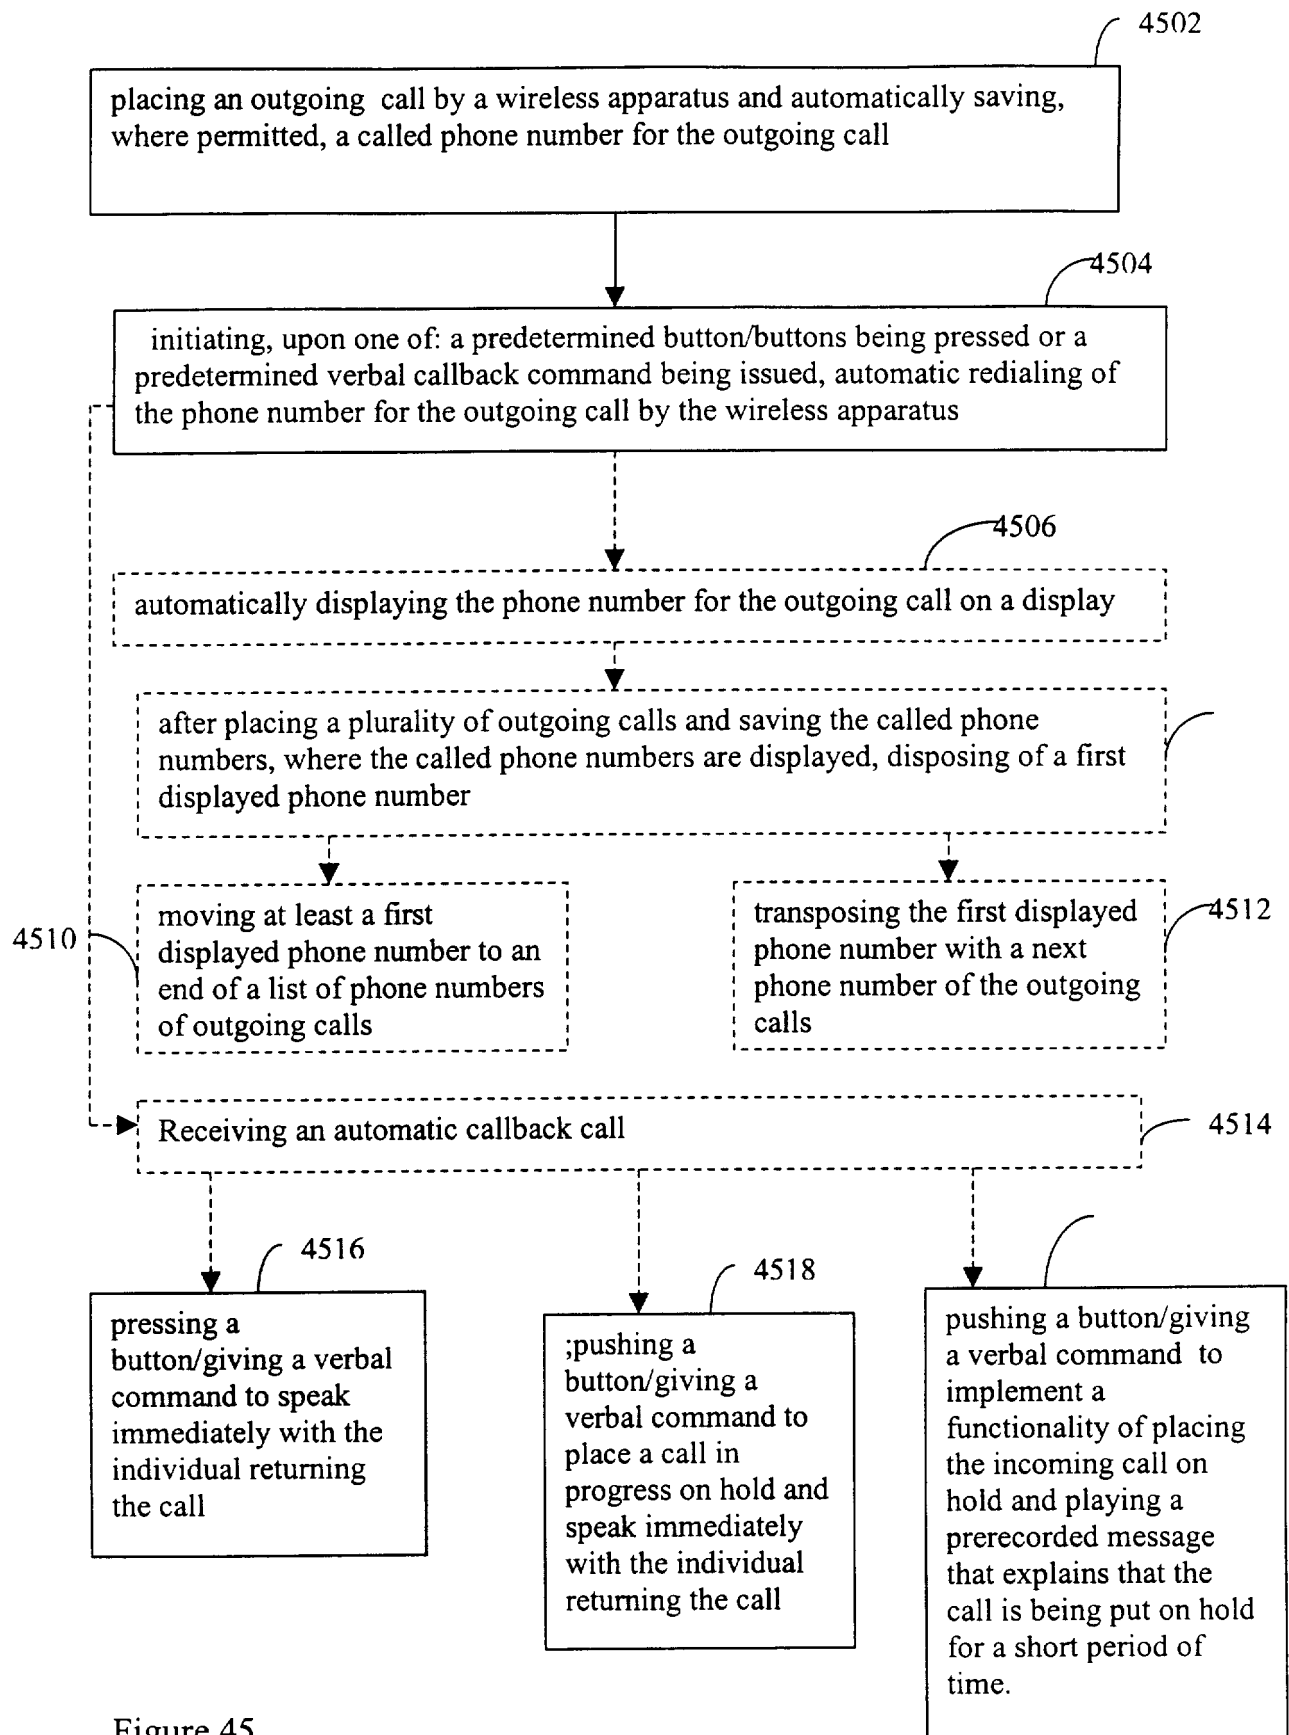


Figure 45

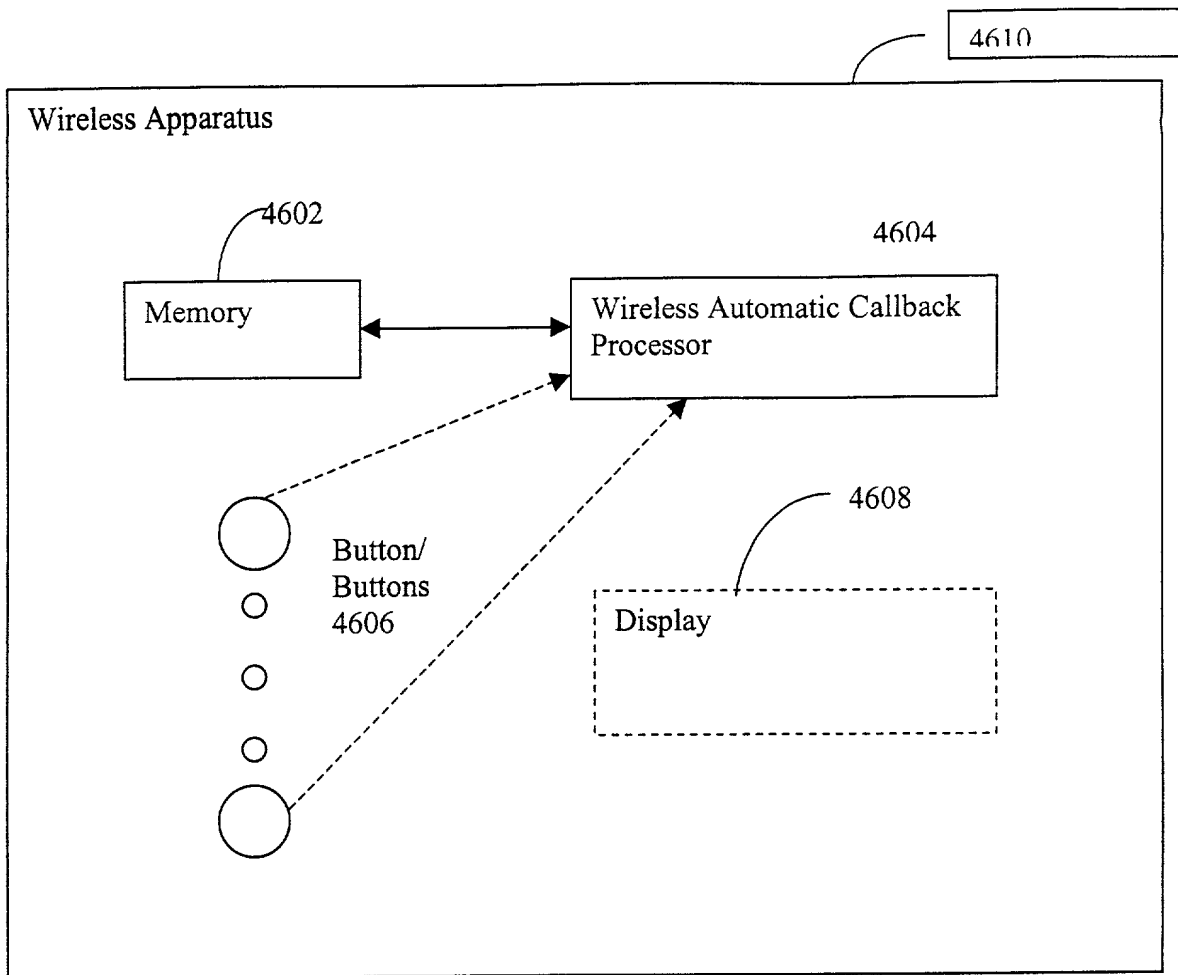


Figure 46

Flow chart for auto call back

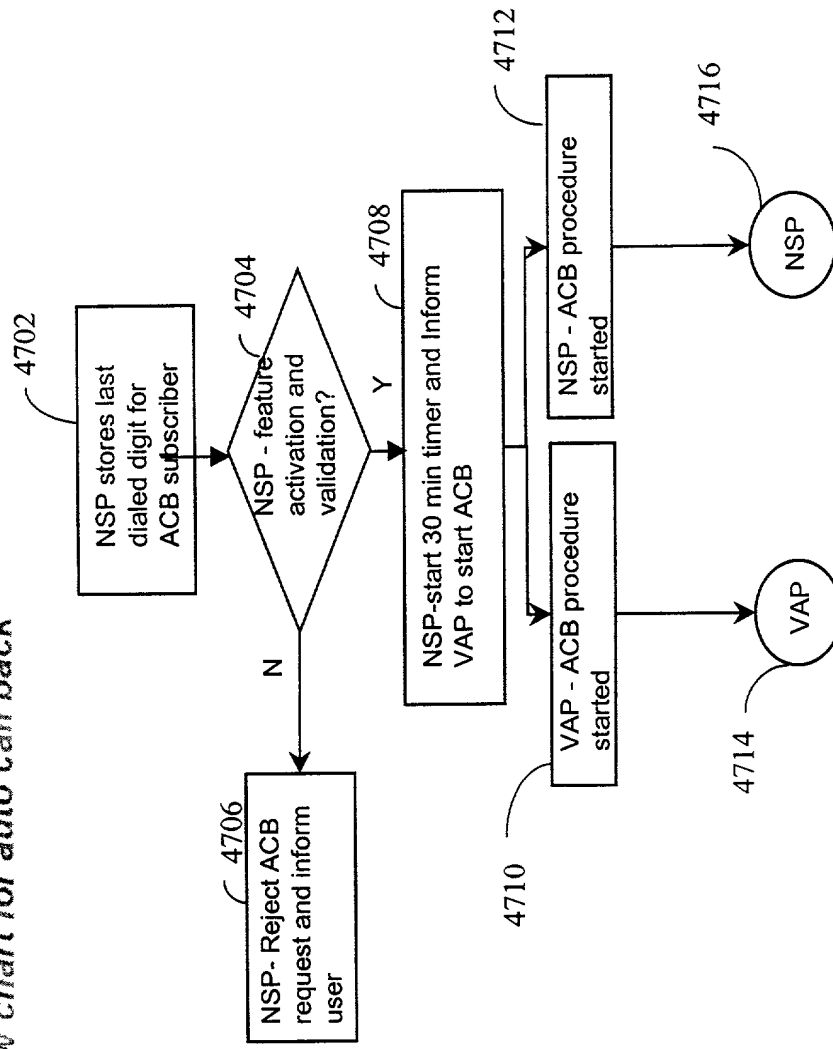


Figure 47A

# Flow chart for auto call back - NSP procedure

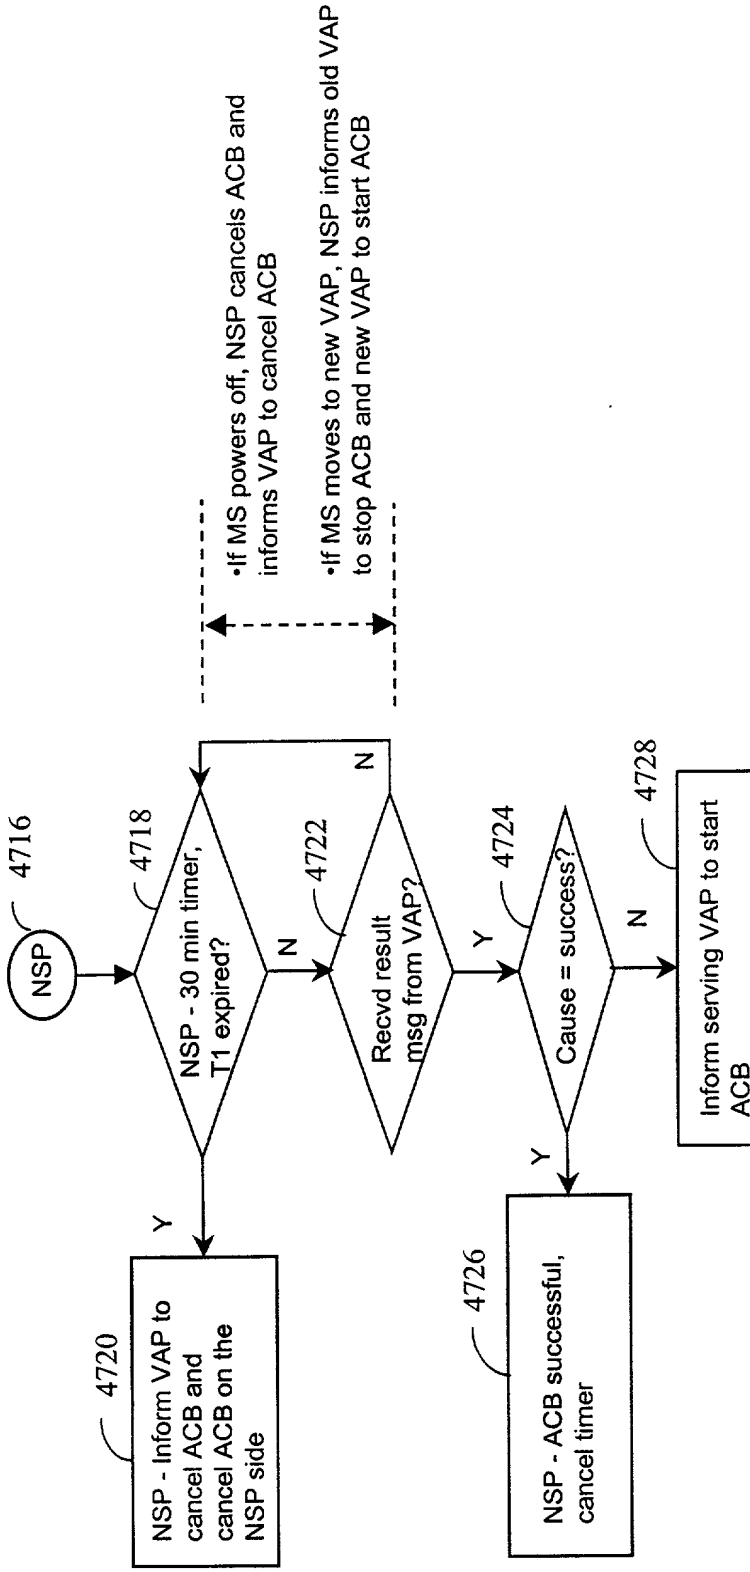


Figure 47B

# Flow chart for auto call back - VAP procedure

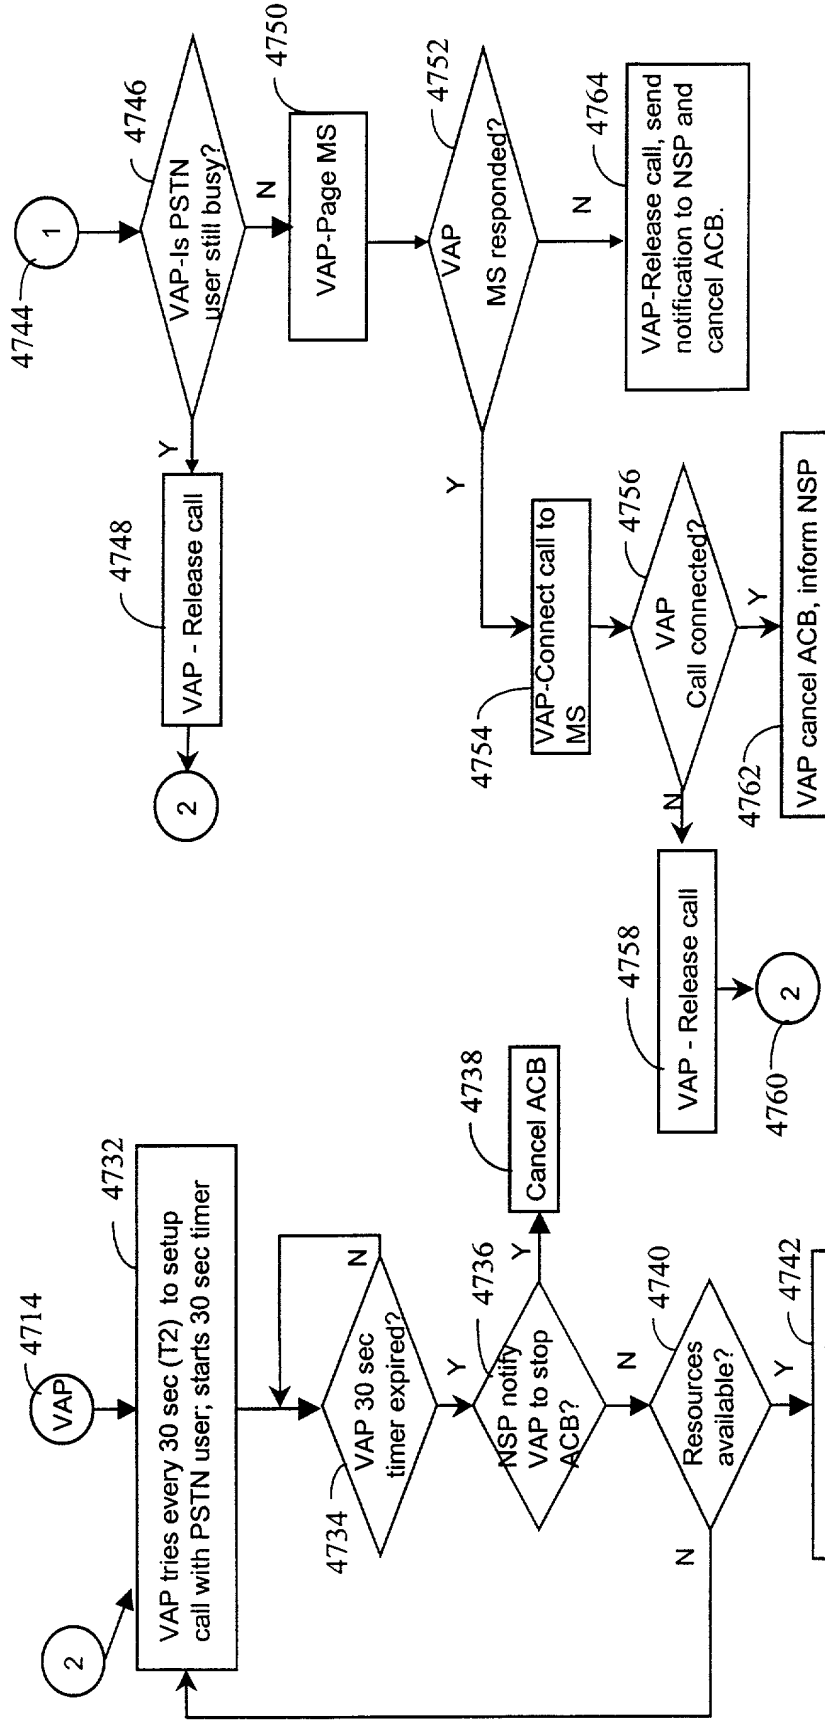


Figure 47C

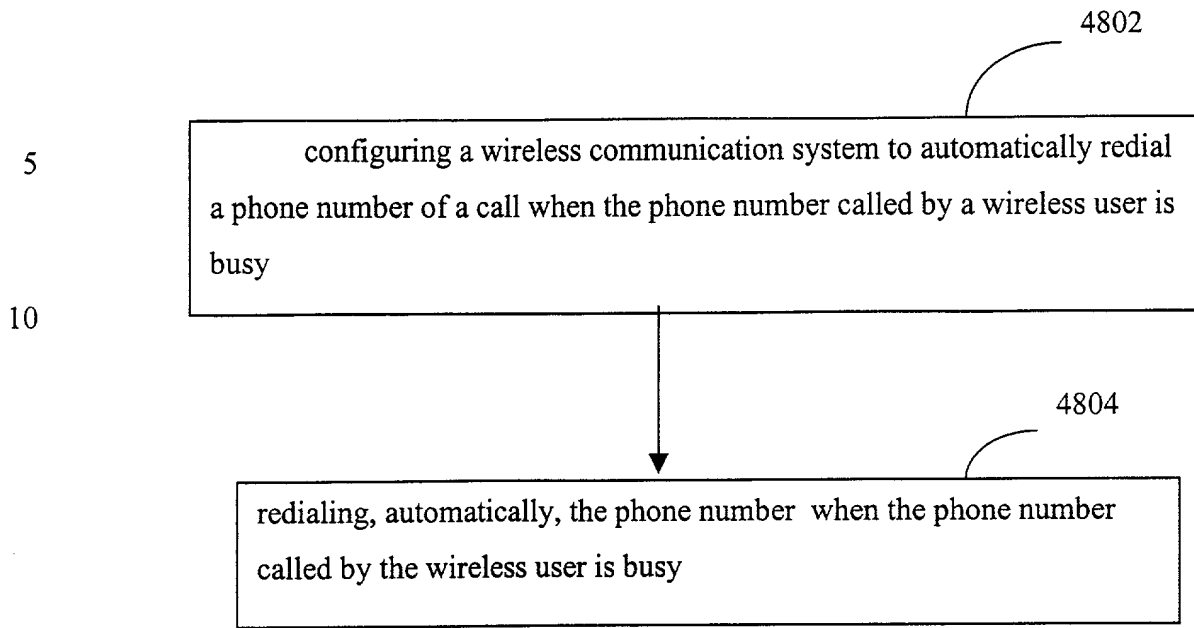


Figure 48



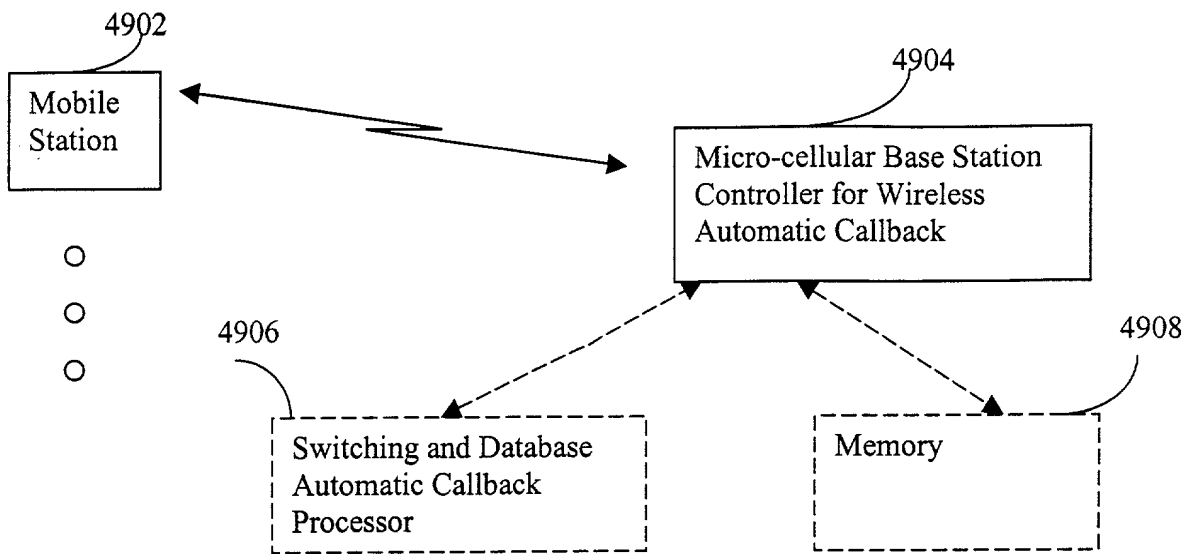


Figure 49

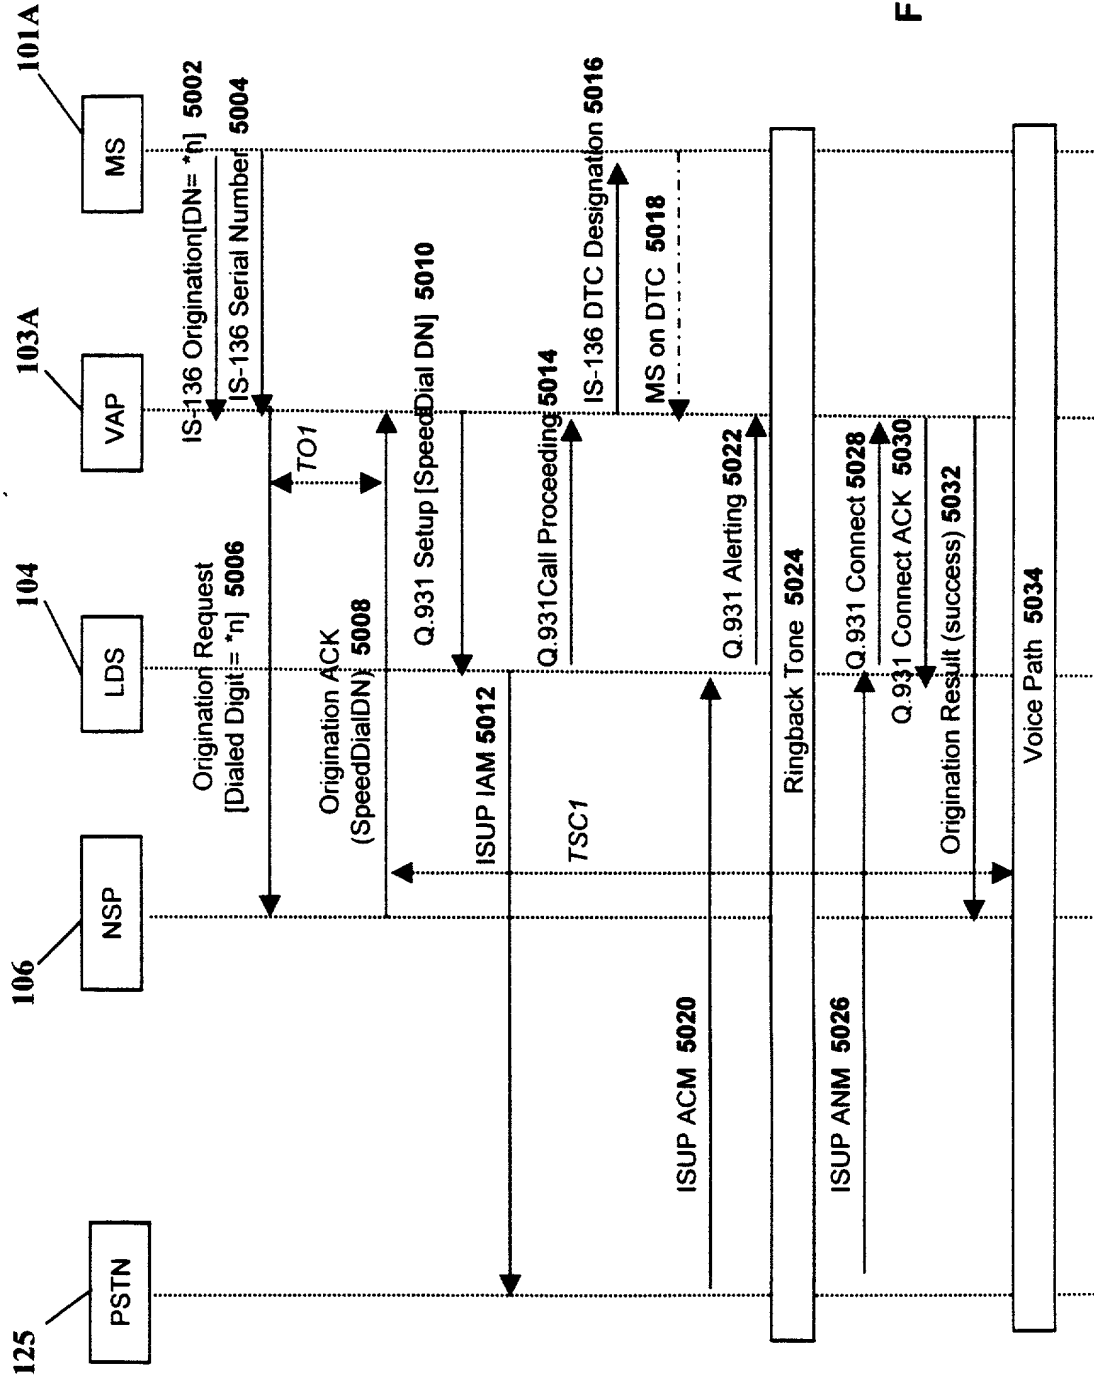


FIG. 50

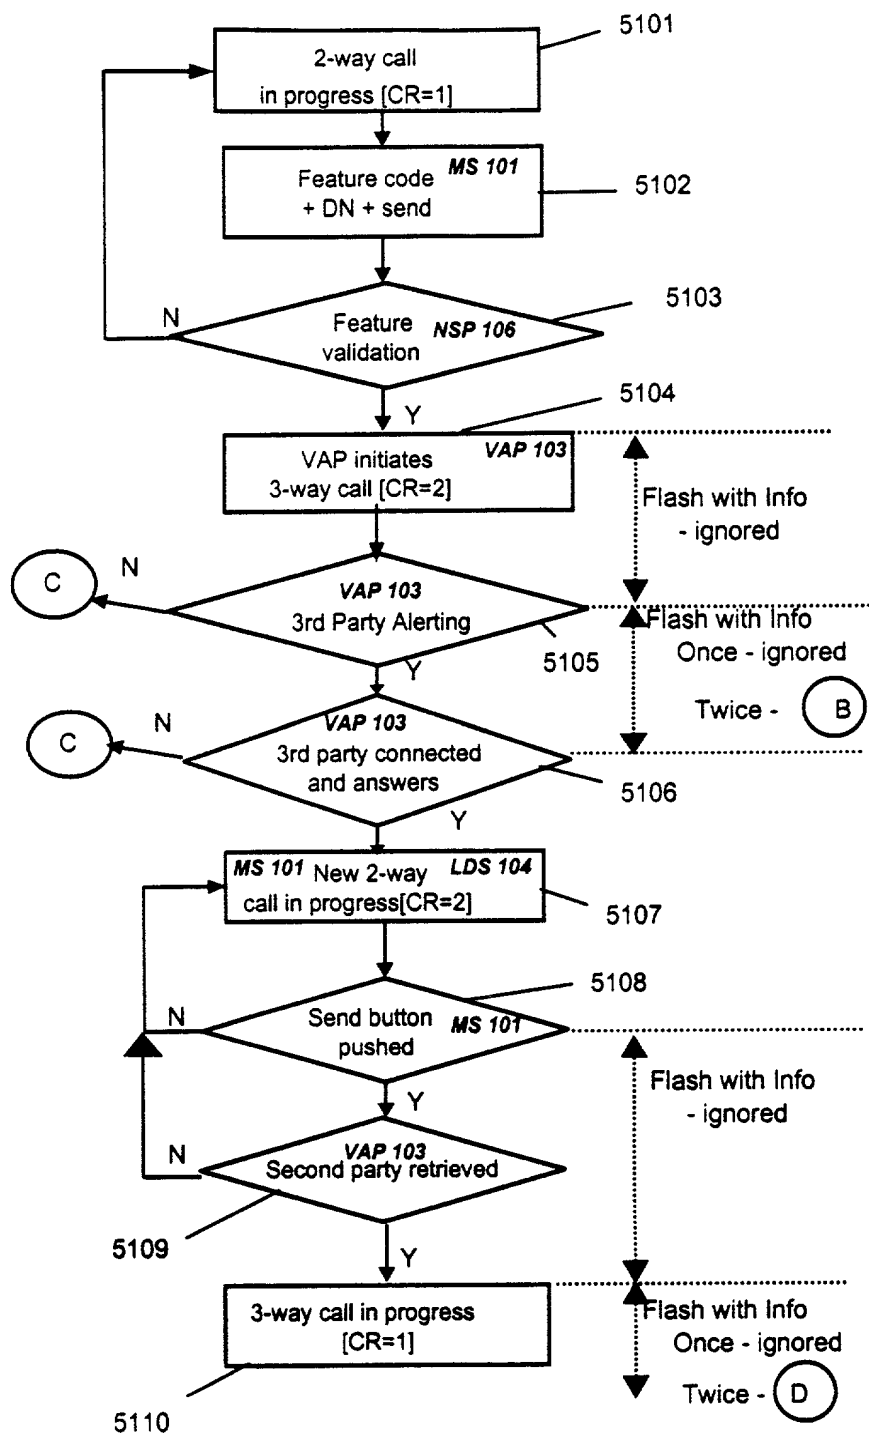


Fig. 51

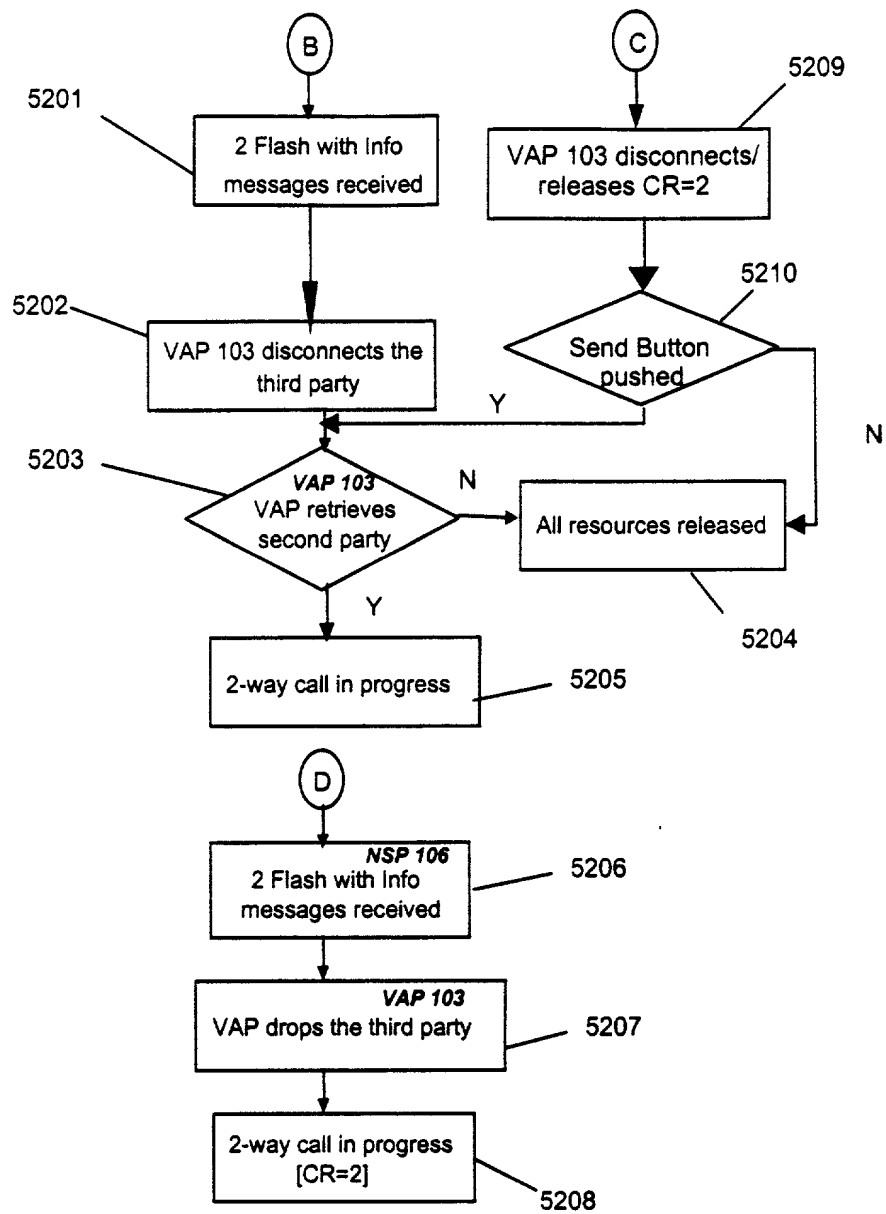
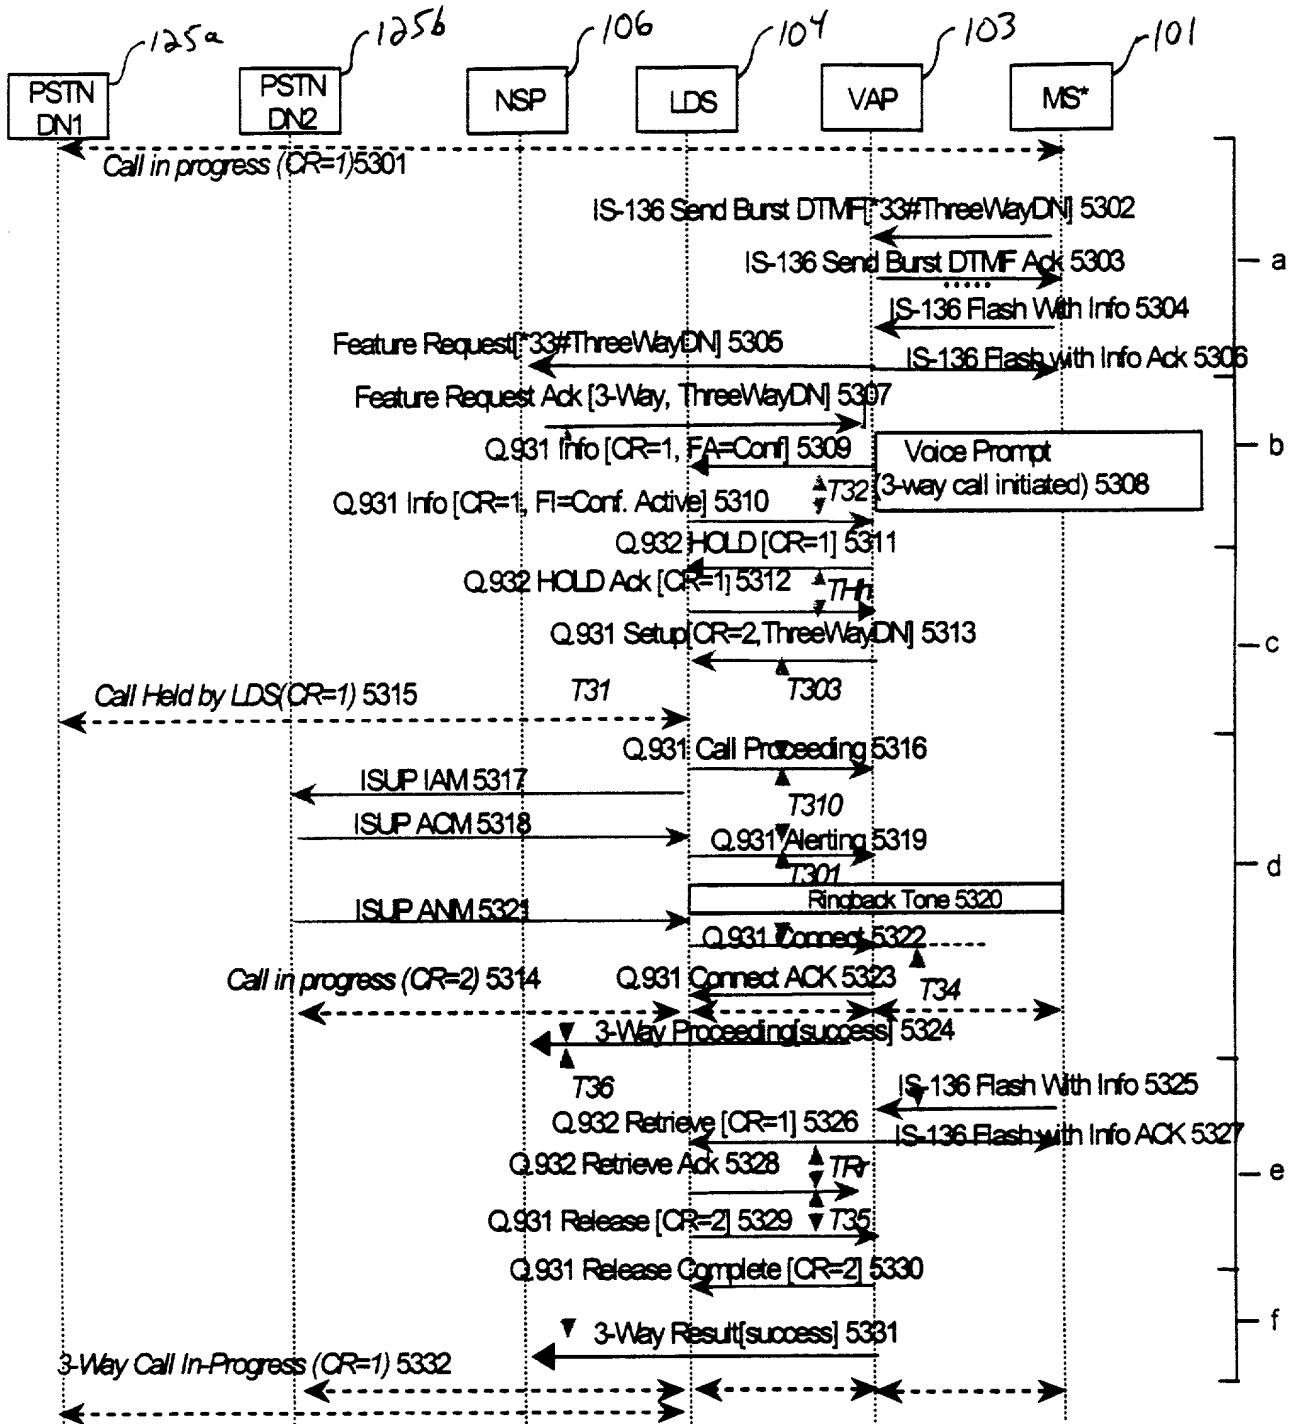
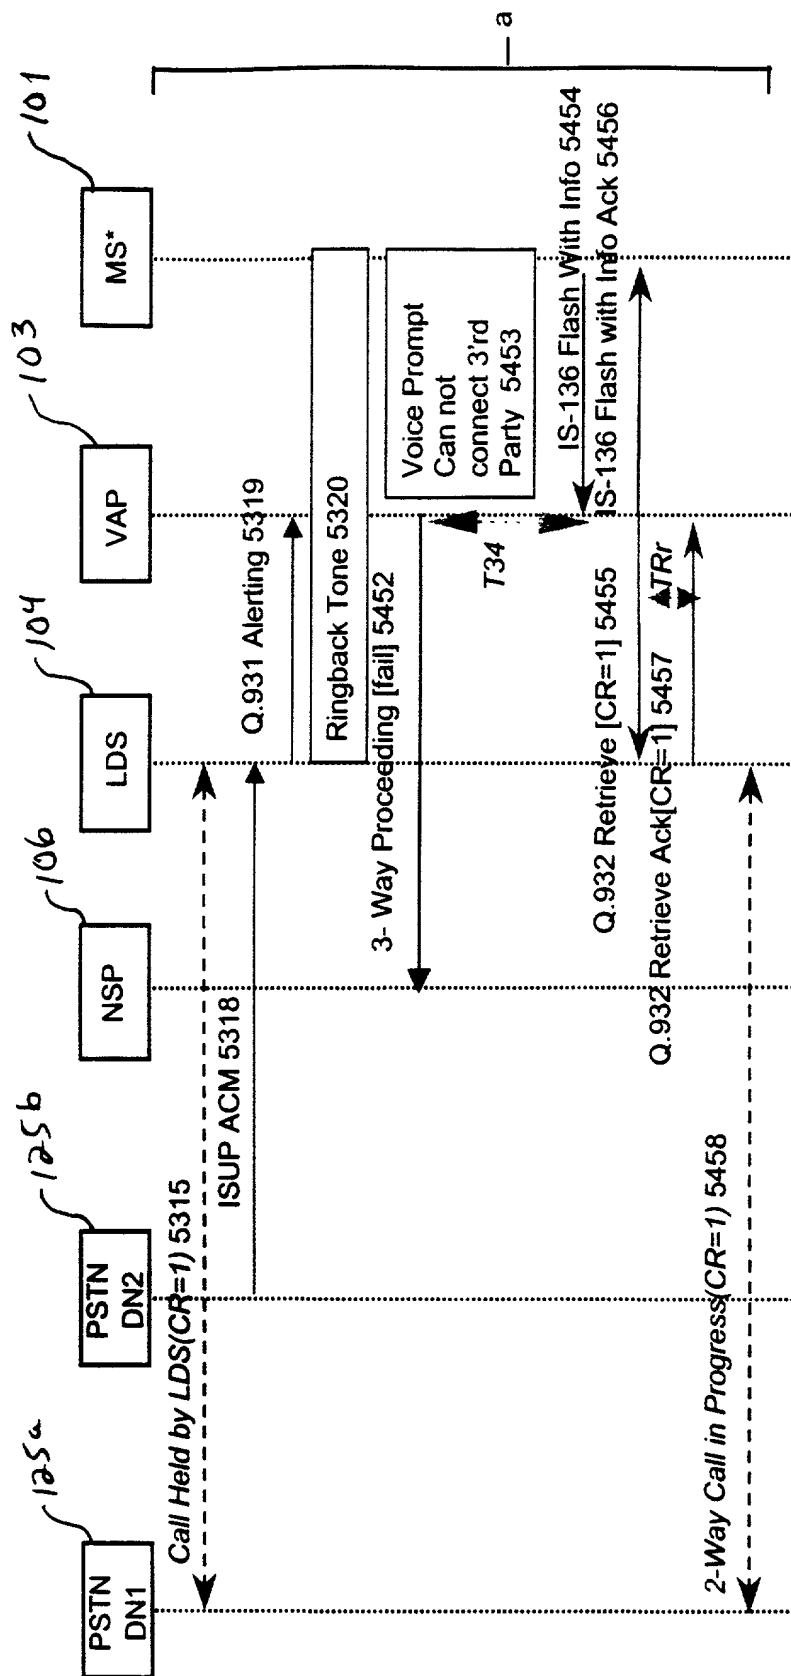


Fig. 52

Fig. 53



**Fig. 54**




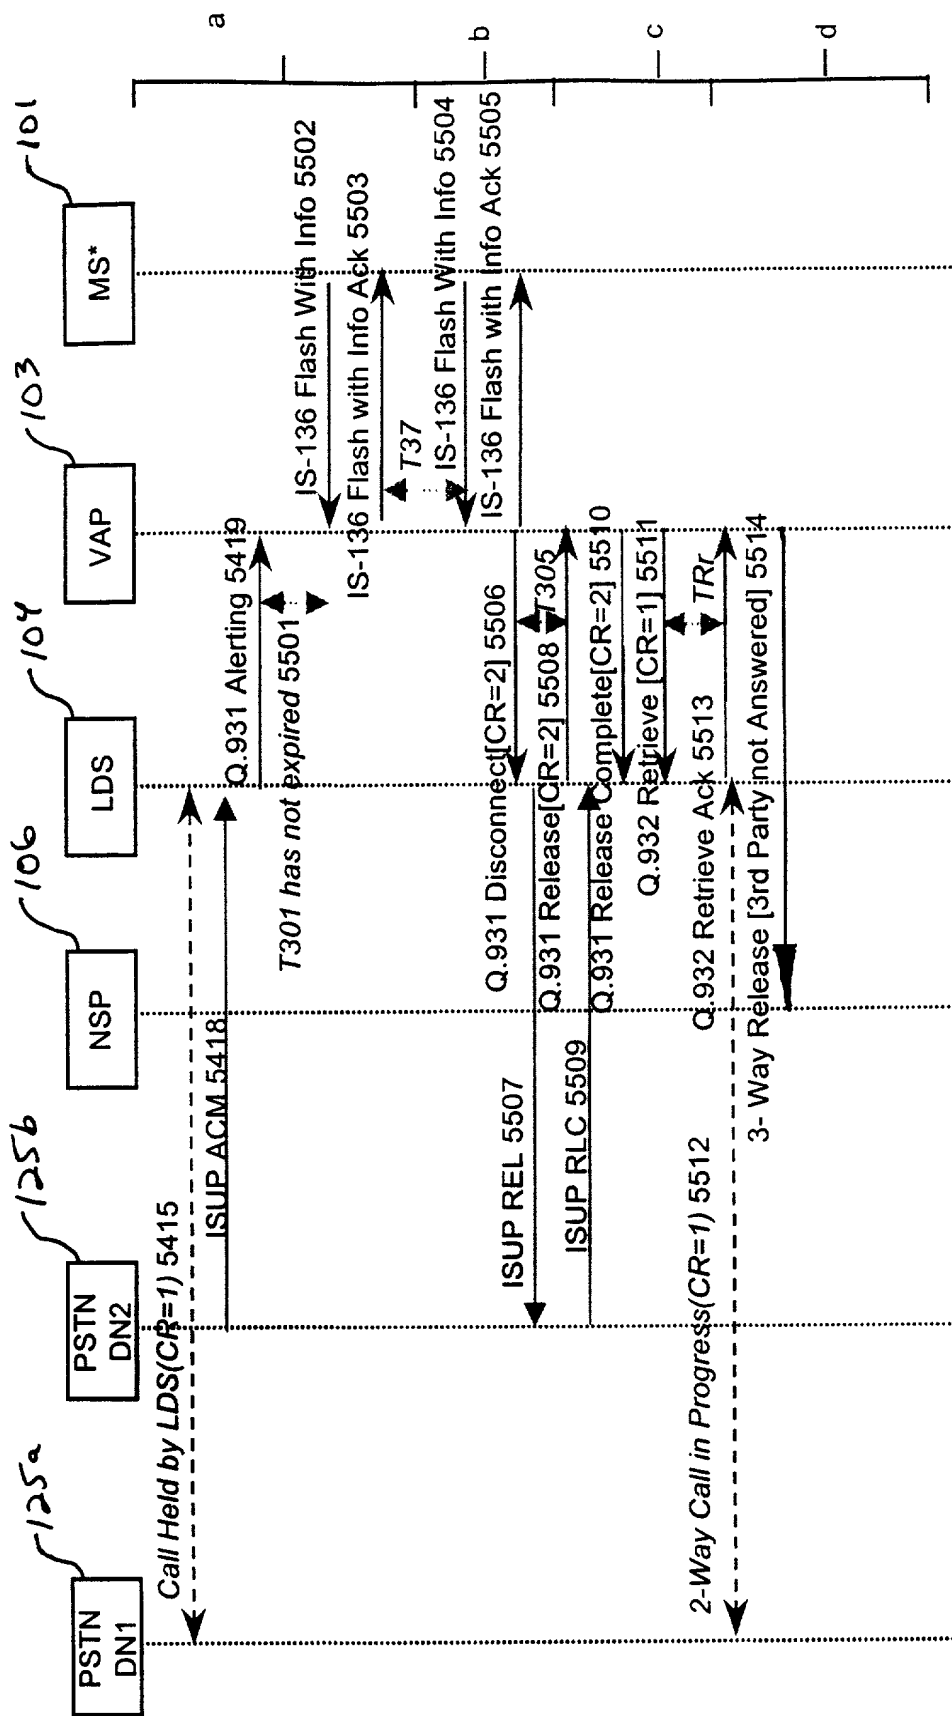


Fig. 55

Fig. 56



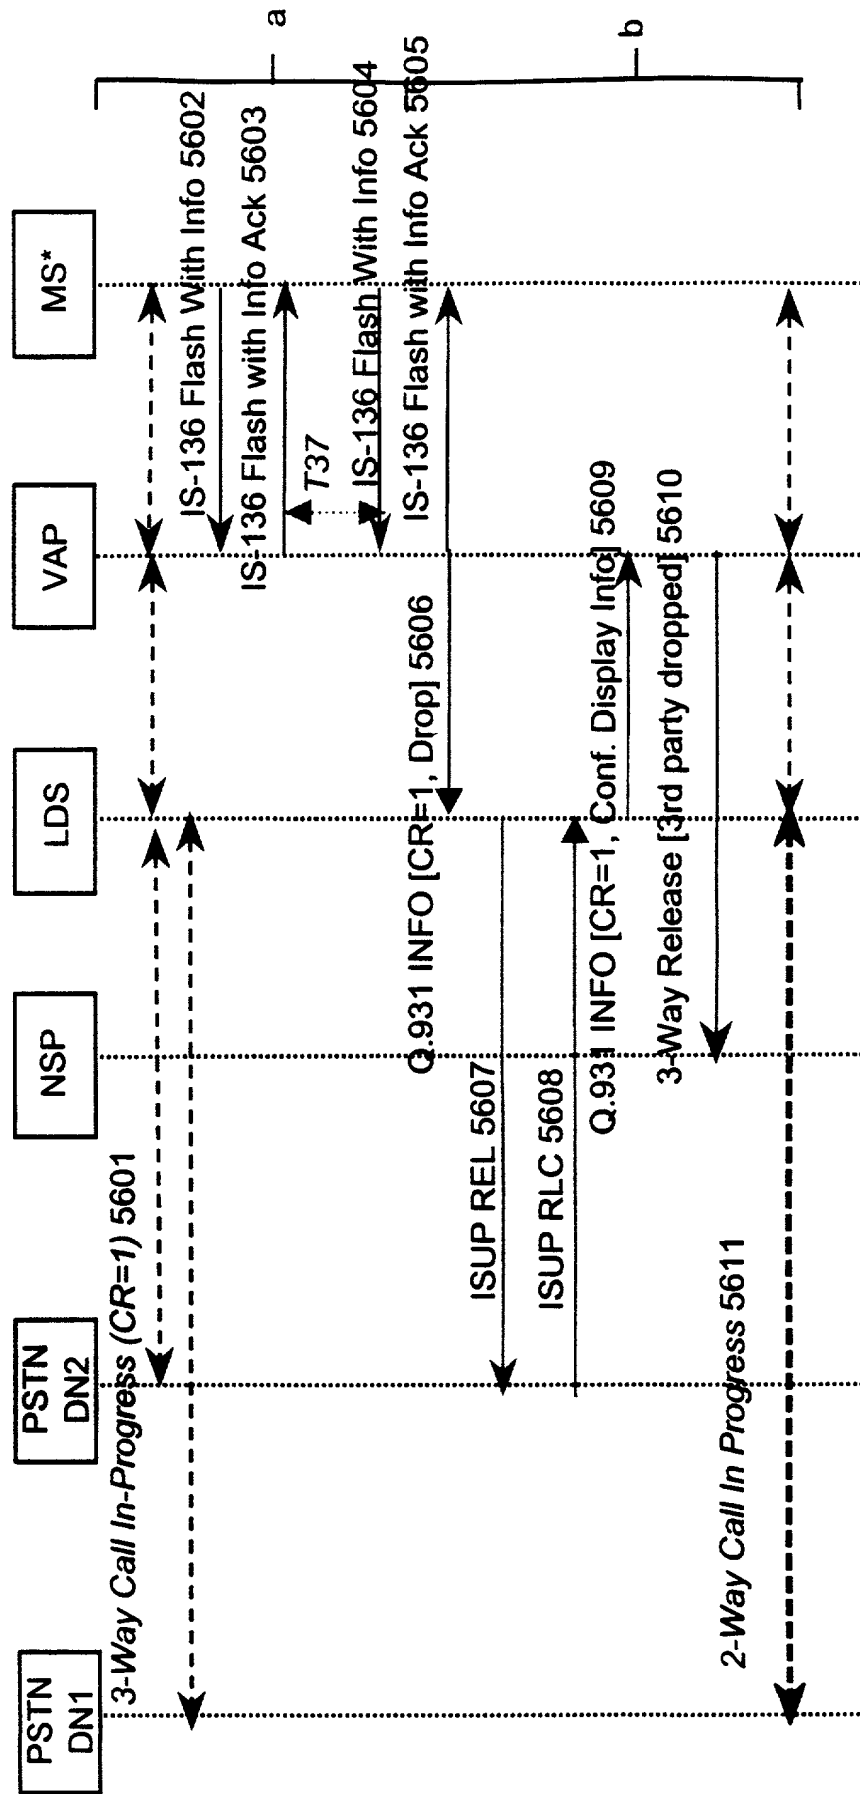

IN THE UNITED STATES  
PATENT AND TRADEMARK OFFICE

**Declaration and Power of Attorney**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **Wireless Centrex Caller ID**, the specification of which is attached hereto, and which in part discloses and claims subject matter disclosed in earlier filed pending applications, Serial Nos. 09/224,272 filed December 31, 1998, 09/223,567 filed December 31, 1998 and 60/114,317 filed December 31, 1998.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventors' certificate listed below and have also identified below any foreign application for patent or inventors' certificate having a filing date before that of the application on which priority is claimed:

None

I hereby claim the benefit under Title 35, United States Code, 119(e) and 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, we acknowledge the duty to disclose all information known to us to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Serial No.	Filed	Status
09/224,272	12/31/98	Pending
09/223,567	12/31/98	Pending
60/114,317	12/31/98	Pending

0445840-1239

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

Samuel H. Dworetsky (Reg. No. 27873)  
 Thomas A. Restaino (Reg. No. 33444)  
 Michele L. Conover (Reg. No. 34962)  
 Benjamin S. Lee (Reg. No. 42787)  
 Robert B. Levy (Reg. No. 28234)  
 Alfred G. Steinmetz (Reg. No. 22971)  
 Cedric G. DeLaCruz (Reg. No. 36498)  
 Rohini K. Garg (Reg. No. 45272)  
 Susan E. McHale (Reg. No. 35948)

I also appoint Thomas H. Jackson (Reg. No. 29808) and Kevin A. Wolff (Reg. No. 42233) of Banner & Witcoff as associate attorneys, with full power to prosecute said application, to make alterations and amendments therein, and to transact all business in the U.S. Patent and Trademark Office connected therewith.

Please address all correspondence to Mr. S. H. Dworetsky, AT&T Corp., P.O. Box 4110, Middletown, New Jersey 07748. Telephone calls should be made to Alfred G. Steinmetz by dialing 973-360-8113.

Full name of 1<sup>st</sup> joint inventor: Albert Chow

Inventor's signature  Date 12/5/89


Residence: Hillsdale, Bergen County, New Jersey

Citizenship: US

Post Office Address: 340 St. Nicholas Avenue  
 Hillsdale, New Jersey 07642

656722 " 04885460

Full name of 2<sup>nd</sup> joint inventor: Jinman Kim

Inventor's signature  Date 12/8/99

Residence: Chatham, Morris County, New Jersey

Citizenship: Republic of Korea

Post Office Address: 25 Hickory Place #A22  
Chatham, New Jersey 07928

09458340 12199

Full name of 3<sup>rd</sup> joint inventor: Hopeton Walker

Inventor's signature Hopeton Walker Date 12/68/1999

Residence: Haledon, Passaic County, New Jersey

Citizenship: US

Post Office Address: 152 West Haledon Avenue  
Haledon, New Jersey 07508

Pat. 04935460

Full name of 4<sup>th</sup> joint inventor: Spencer Wang

Inventor's signature  Date 12/8/99

Residence: Parsippany, Morris County, New Jersey

Citizenship: US

Post Office Address: 19 Warwick Road  
Parsippany, New Jersey 07054

66322 04889460

Full name of 5<sup>th</sup> joint inventor: Wenchu Ying

Inventor's signature Wenchu Ying Date 12/8/99

Residence: Cedar Knolls, Morris County, New Jersey

Citizenship: US

Post Office Address: 4 Larch Road  
Cedar Knolls, New Jersey 07927

09453840 "04825460